

AMERICAN AVK HIGH PRESSURE, 250 PSI, MODERN, DRY BARREL HYDRANT

2700
MODERN

Meets or exceeds AWWA C502 (latest) - Working Pressure - 250 PSI

Inlet Bases: Flanged in accordance with ANSI B16.1 Class 125,

Mechanical and Push-On Joint in accordance with ANSI/AWWA C111/A21.11

Use:

For water and neutral liquids to maximum 160°F.

Tests:

Hydraulic test to AWWA C502:

Seat Test: 500 PSI

Approvals:

UL/ULC Listed,
FM Approved



Components:

Nozzle Section, Bonnet, Barrels, Standpipe Flanges,
Breakable Flange, Main Valve Flange, Base, Monitor Elbow

Caps, Weathershield

Nozzles, Valve Seat Ring, Drain Ring
Operating Nut, Thrust Nut

Brass Fittings, Brass Plugs

Main Valve

Stem Rod Couplings, Lock Rings, Nozzle Retaining
Screw, Lock Plate, Lock Plate Screw, Spider Bolt, Stop Pins,
Coupler Pins, Main Valve Retaining Pin, Spring Pins,

Coating

Stop Nut, Chain Set, Hardware

Barrel Gasket, Cap Gasket, O-rings

Lubrication Hole Seal

Anti-Friction Washer

Base Elbow / Inlet Configuration

☐ 6" MJ

☐ 4" MJ

☐ 8" MJ*

☐ 6" Flanged

☐ 4" Flanged

☐ Straight Flanged 6"

☐ 6" Push-on

☐ 4" PE*

☐ 6" PE*

*Not UL/ULC Listed or FM Approved

Optional Materials:

Hardware

Upper Stem Rod

Lower Stem Rod

☐ Zinc Plated

☐ 304 Stainless

☐ 304 Stainless

☐ 304 Stainless

☐ Epoxy Coated Steel

☐ Epoxy Coated Steel

☐ 316 Stainless

Opening Direction

☐ Open Left

☐ Open Right

Standard:

Ductile Iron ASTM A536

Cast Iron ASTM A126 Class "B"

Bronze

Brass

Ductile iron core, fully encapsulated with EPDM rubber.

Stainless Steel

Above ground-Fusion bonded epoxy inside and out. Below
ground - Bitumen/Fusion bonded epoxy. Epoxy meets or
exceeds AWWA C550 (latest)

Zinc Plated Steel


NBR - (Barrel Gasket with 304 stainless insert)

Oil Resistant Rubber

Polyamide



American AVK Company
an ISO 9001-2000 registered company

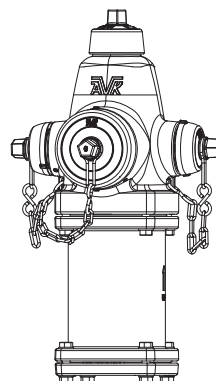

Series 2700
1 Pumper, 2 Hose Outlet

DS S2700 MODERN
Subject to change without notice. (rev. 12/07)

AMERICAN AVK HIGH PRESSURE, 250 PSI, MODERN, DRY BARREL HYDRANT

2700
MODERN



Meets or exceeds AWWA C502 (latest) - Working Pressure - 250 PSI

Inlet Bases: Flanged in accordance with ANSI B16.1 Class 125,


Mechanical and Push-On Joint in accordance with ANSI/AWWA C111/A21.11

Component List:

- | | | | |
|-------------------------------|--------------------------------------|----------------------------------|-------------------------------|
| 1. Weathershield Bolt | 21. Hose Nozzle Cap Gasket -Detail A | 37. Breakable Stem Rod | 58. Stop Pin -Detail B |
| 2. Weathershield | 22. Hose Nozzle O-ring - Detail A | Coupling | 60. Main Valve Retaining Pin |
| 3. Lock Plate Screw | 23. Nozzle Retaining Screw | 38. Spring Pin | -Detail B |
| 4. Lock Plate | 24. Chain Set | 39. Spider | 61. Main Valve Disc -Detail B |
| 5. Inner Thrust Nut O-ring | 25. Pumper Nozzle O-ring | 40. Spider Bolt | 62. Base Gasket -Detail B |
| 6. Thrust Nut | 26. Pumper Nozzle | 41. Lower Stem Rod | 64. Stud Bolt -Detail B |
| 7. Outer Thrust Nut O-ring | 27. Pumper Nozzle Gasket | 46. Standpipe Flange -Detail B | 67. Base |
| 8. Anti-Friction Washer | 28. Pumper Nozzle Cap | 49. Lower Barrel | 71. Modern Nozzle Section |
| 9. Lubrication Hole Seal | 29. Nozzle Section | 50. Lower Barrel O-ring Detail B | Bolt |
| 10. Operating Nut | 30. Nozzle Section Bolt | 51. Valve Seat O-ring -Detail B | 75. Zerk Fitting |
| 11. Stop Nut | 31. Nozzle Section Washer | 53. Valve Seat O-ring -Detail B | |
| 15. Stem Seal O-rings | 32. Lock Ring | 54. Drain Ring -Detail B | |
| 16. Upper Stem Rod | 33. Breakable Flange | 55. Brass Plug -Detail B | |
| 17. Barrel Gasket | 34. Nozzle Section Nut | 56. Brass Fitting -Detail B | |
| 19. Hose Nozzle Cap -Detail A | 35. Upper Barrel | 57. Main Valve Flange | |
| 20. Hose Nozzle -Detail A | 36. Coupler Pin | -Detail B | |

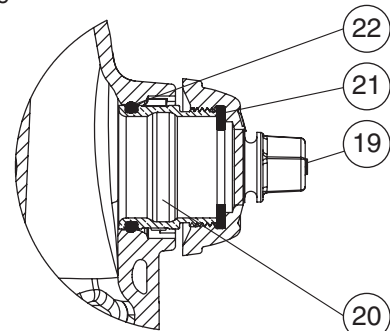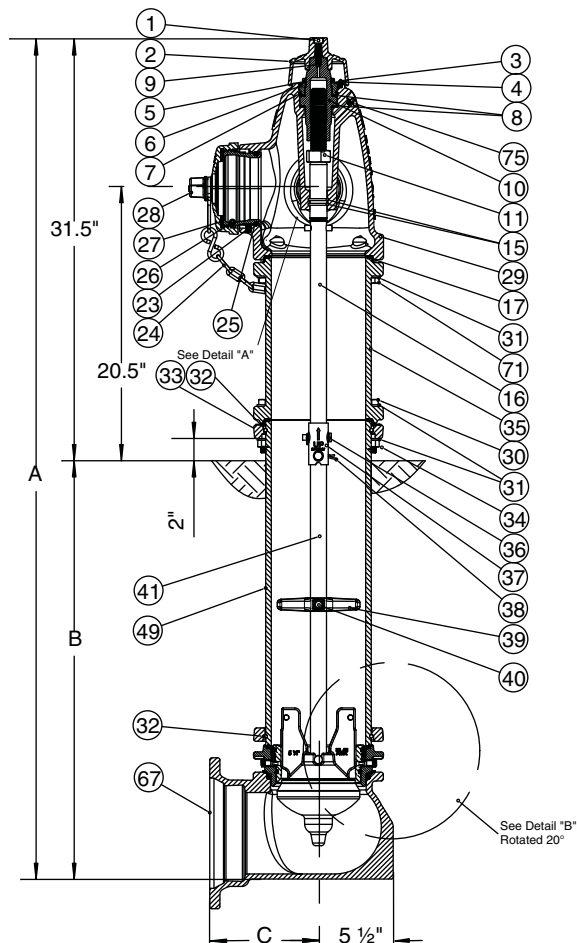

Detail "A"

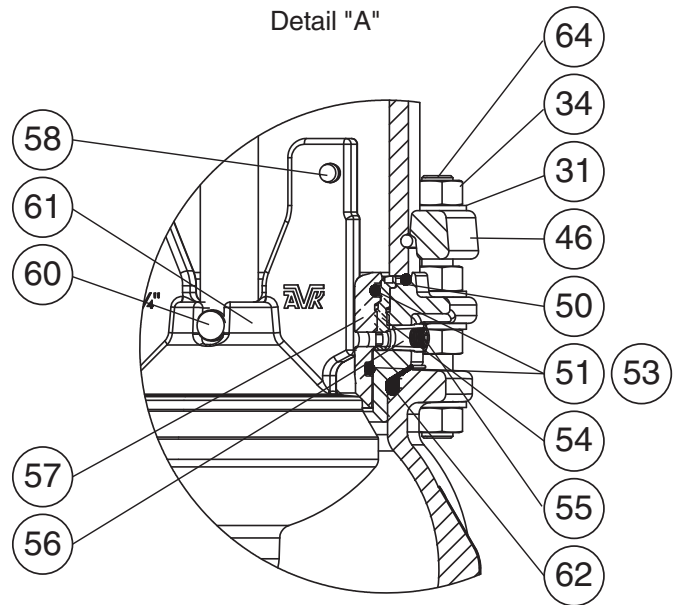

Detail "B"

Ref No.	Outlets	A	B*	C			
				Flanged	MJ	Push-on	PE
27-00 - 4"	2x2½", 1x4"/4½"	49.50" - 242.50"	18" - 216"	8.00"	8.00"	N/A	23.70"
27-00 - 6"	2x2½", 1x4"/4½"	49.50" - 242.50"	18" - 216"	8.00"	8.00"	9.00"	22.80"
27-00 - 8"	2x2½", 1x4"/4½"	49.50" - 242.50"	18" - 216"	N/A	9.38"	N/A	N/A

* Buries greater than 216" available upon request.

