


Features

- KOHLER cast iron
- Acid-resistant enamel finish
- Single bowl
- 17" (432 mm) x 18-3/4" (476 mm) (top-mount)
- 14" (356 mm) x 15-3/4" (400 mm) (under-mount)
- 7-1/2" (191 mm) (bowl depth)

TOP-MOUNT OR UNDER-MOUNT KITCHEN SINK K-6584

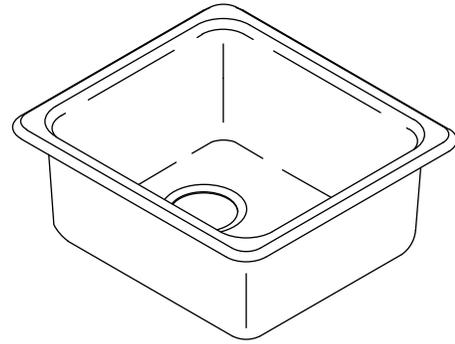

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-6584	Kitchen sink	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Optional Accessories			
K-3190	Bottom bowl rack	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3277	Coated wire rinse basket	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3294	Hardwood cutting board		<input type="checkbox"/> NA
K-5807	36" (914 mm) under-mount sink kit		<input type="checkbox"/> NA
K-8801	Duostrainer® sink strainer	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification

The sink shall be made of cast iron with acid-resistant enamel finish. The top-mount kitchen sink shall be 17" (432 mm) in length, and 18-3/4" (476 mm) in width, or the under-mount sink shall be 14" (356 mm) in length, and 15-3/4" (400 mm) in width. The sink shall be 7-1/2" (191 mm) in bowl depth. The sink shall be single bowl. The sink shall be Kohler Model K-6584-_____.

IRON/TONES®

Technical Information

Fixture*:	
Bowl area	14" (356 mm) x 16" (406 mm)
Drain hole	Ø 3-7/8" (98 mm)
Water depth	7-1/2" (191 mm)
* Approximate measurements for comparison only.	
Included components:	
Bowl clamp accessory pack	52047
Cut-out template	114332-7



Installation Notes

Install this product according to the installation guide.

Refer to install instructions included with fixture before beginning installation.

Supplied bowl clamp assemblies require 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

For multiple bowl under-mount installations, a minimum distance of 3-3/8" (86 mm) is required between bowls. Countertop supplier to determine required support.

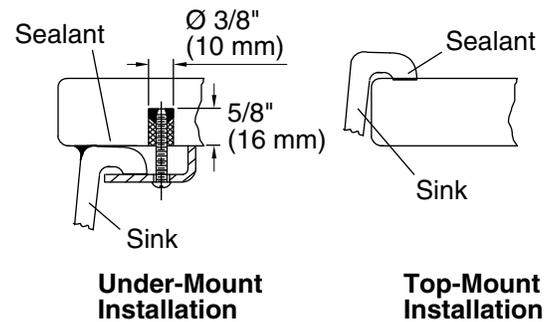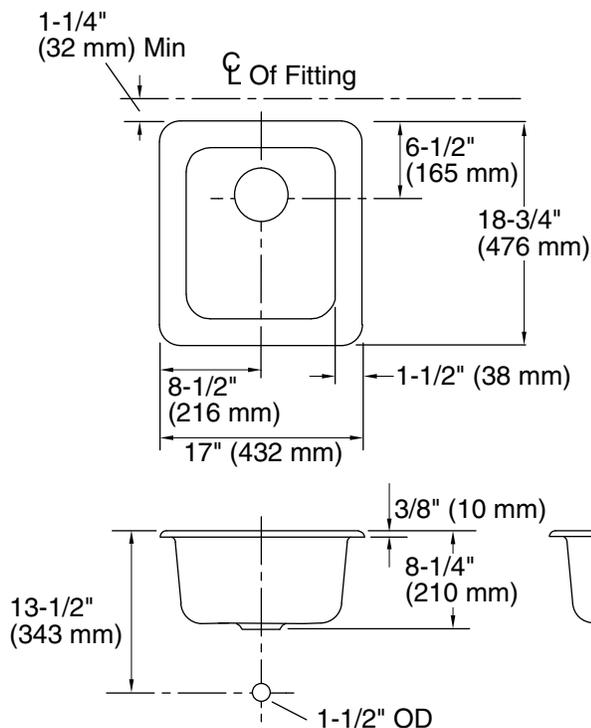

Product Diagram