


Multi-Turn Boiler Drains

125 lb. CWP to 100°F
Maximum Temperature 180°F

MULTI-TURN MATERIALS LIST

PART	SPECIFICATION
Body	Cast Copper - Based Alloy C84400
Bonnet	Cast Copper - Based Alloy C84400
Stem	Cold-formed Copper Alloy
Seat Disc	Buna-N
Seat Disc Screw	Stainless Steel, Type 410
Packing Nut	Free Cutting Brass - ASTM B 16
Packing	Graphite Impregnated, Asbestos-Free
Handwheel	Epoxy Coated Zinc Alloy
Handwheel Screw	Carbon Steel - Clear Chromate Finish

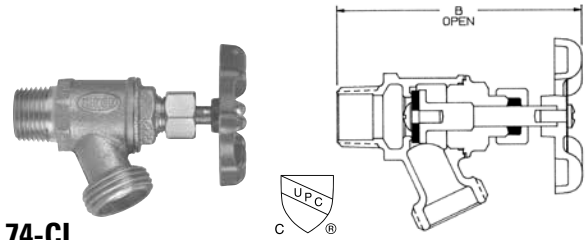


74-CL

DESCRIPTION	NOM. SIZE	DIMENSIONS	APPROX. NET WT.
		B	
Boiler Drain Copper or Male Threads to Hose	1/2"	3 11/16"	.4 lb
	3/4"*	3 3/4"	.45 lb

IAPMO Listed to cUPC®


* 3/4" furnished in male threads only

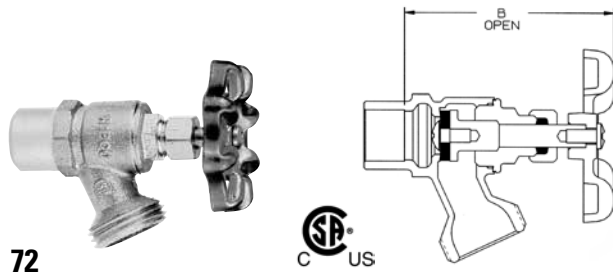

72


DESCRIPTION	NOM. SIZE	DIMENSIONS	APPROX. NET WT.
		B	
Boiler Drain Cup to Hose	1/2"	3 1/16"	.40 lb
	3/4"*	2 13/16"	.40 lb

* 3/4" not CSA listed

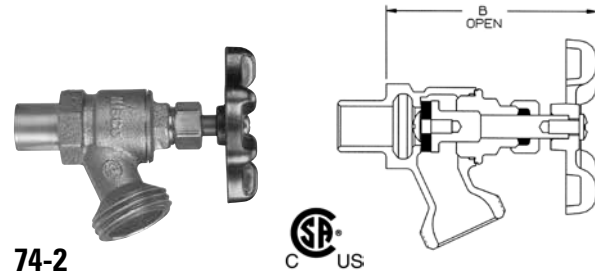

74-2


DESCRIPTION	NOM. SIZE	DIMENSIONS	APPROX. NET WT.
		B	
Boiler Drain Fit to Hose	1/2"	3 3/8"	.40 lb

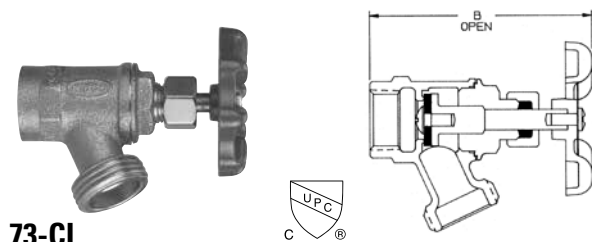

73-CL

DESCRIPTION	NOM. SIZE	DIMENSIONS	APPROX. NET WT.
		B	
Boiler Drain Threaded to Hose	1/2"	3 1/4"	.50 lb
	3/4"	3 5/16"	.60 lb

IAPMO Listed to cUPC®

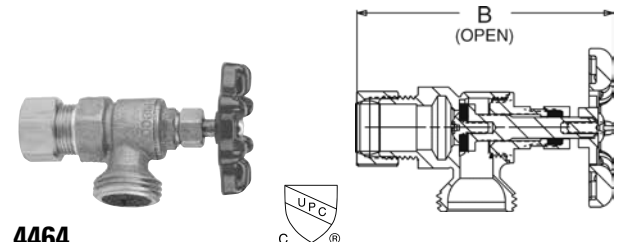

4464

DESCRIPTION	NOM. SIZE	DIMENSIONS	APPROX. NET WT.
		B	
Boiler Drain Compression to Hose	1/2"	3 1/4"	.50 lb

IAPMO Listed to cUPC®

NOT FOR USE WITH POTABLE DRINKING WATER APPLICATIONS AFTER JANUARY 3, 2014.