


Vu-Flow Screen Filters





NT SO Series

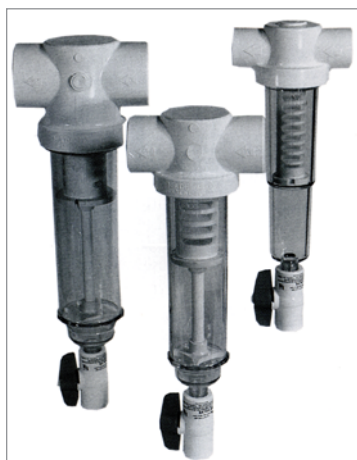

T Style Sand Separator Filter Features:

- 180° in-line "T" style.
- 1-100 GPM models
- "Spin-out" action separates heavier than water particles away from screen into the collection chamber.
- Screen portion of element removes lighter than water particles.
- Extended sump provides greater collection area for sediment.
- Supplied with a 1/2" cleanout with purge valve.
- Supplied with polyester filter screen.
- Also available with stainless steel screen as special order.

• WATER USE ONLY

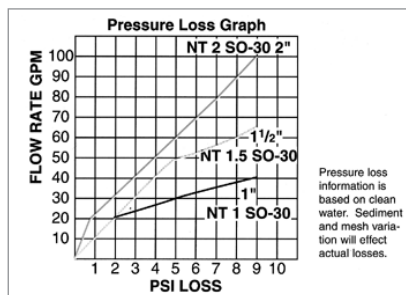

Part Number	Inlet/Outlet "P"	Mesh # & Size	Mesh Opening	Min*/Max Flow GPM	"L"	"W"	List Price w/ Purge Valve
IPS x IPS (Female Thread 3/4" only)							
NT75SO-60P	3/4" x 3/4"	60 (254 mic)	0.01	1-25	14 3/8"	5	\$ 133.42
NT75SO-100P	3/4" x 3/4"	100 (152 mic)	0.006	1-25	14 3/8"	5	133.42
NT75SO-140P	3/4" x 3/4"	140 (104 mic)	0.004	1-25	14 3/8"	5	133.42
NT75SO-250P	3/4" x 3/4"	250 (61 mic)	0.0024	1-25	14 3/8"	5	138.38
Slip x Slip							
NT1SO-60P	1" x 1"	60 (254 mic)	0.01	1-25	14 3/8"	5	133.42
NT1SO-100P	1" x 1"	100 (254 mic)	0.006	1-25	14 3/8"	5	133.42
NT1SO-140P	1" x 1"	140 (104 mic)	0.004	1-25	14 3/8"	5	133.42
NT1SO-250P	1" x 1"	250 (61 mic)	0.0024	1-25	14 3/8"	5	138.38
Slip x Slip							
NT1.5SO-24P	1-1/2" x 1-1/2"	24 (711 mic)	0.028	10-50	15 3/8"	5 1/4"	162.08
NT1.5SO-30P	1-1/2" x 1-1/2"	30 (533 mic)	0.021	10-50	15 3/8"	5 1/4"	162.08
NT1.5SO-40P	1-1/2" x 1-1/2"	40 (384 mic)	0.015	10-50	15 3/8"	5 1/4"	162.08
NT1.5SO-60P	1-1/2" x 1-1/2"	60 (254 mic)	0.010	10-50	15 3/8"	5 1/4"	167.00
NT1.5SO-100P	1-1/2" x 1-1/2"	100 (152 mic)	0.006	10-50	15 3/8"	5 1/4"	167.00
NT1.5SO-140P	1-1/2" x 1-1/2"	140 (104 mic)	0.004	10-50	15 3/8"	5 1/4"	167.00
NT1.5SO-250P	1-1/2" x 1-1/2"	250 (61 mic)	0.0024	10-50	15 3/8"	5 1/4"	173.38
NT1.5SO-500P	1-1/2" x 1-1/2"	500 (30 mic)	0.0012	10-50	15 3/8"	5 1/4"	173.38
Slip x Slip							
NT2SO-24P	2" x 2"	24 (711 mic)	0.028	18-100	17 7/8"	5 1/2"	250.69
NT2SO-30P	2" x 2"	30 (533 mic)	0.021	18-100	17 7/8"	5 1/2"	250.69
NT2SO-40P	2" x 2"	40 (384 mic)	0.015	18-100	17 7/8"	5 1/2"	250.69
NT2SO-60P	2" x 2"	60 (254 mic)	0.010	18-100	17 7/8"	5 1/2"	254.99
NT2SO-100P	2" x 2"	100 (152 mic)	0.006	18-100	17 7/8"	5 1/2"	254.99
NT2SO-140P	2" x 2"	140 (104 mic)	0.004	18-100	17 7/8"	5 1/2"	254.99
NT2SO-250P	2" x 2"	250 (61 mic)	0.0024	18-100	17 7/8"	5 1/2"	261.26
NT2SO-500P	2" x 2"	500 (30 mic)	0.0012	18-100	17 7/8"	5 1/2"	261.26

- Do not use metal valve or fitting on 1/2" drain connections
 - Do not install filters with purge valves on the suction side of pump
- * Minimum flow needed for "spin-out" action.

Carton Quantity of 10 for all products

8/21/18

4.34



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (800) 268-7570 Fax (905) 629-3204

www.americangranby.com