




Z1325

WALL HYDRANT
Encased, Vari-Temp, Non-Freeze

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

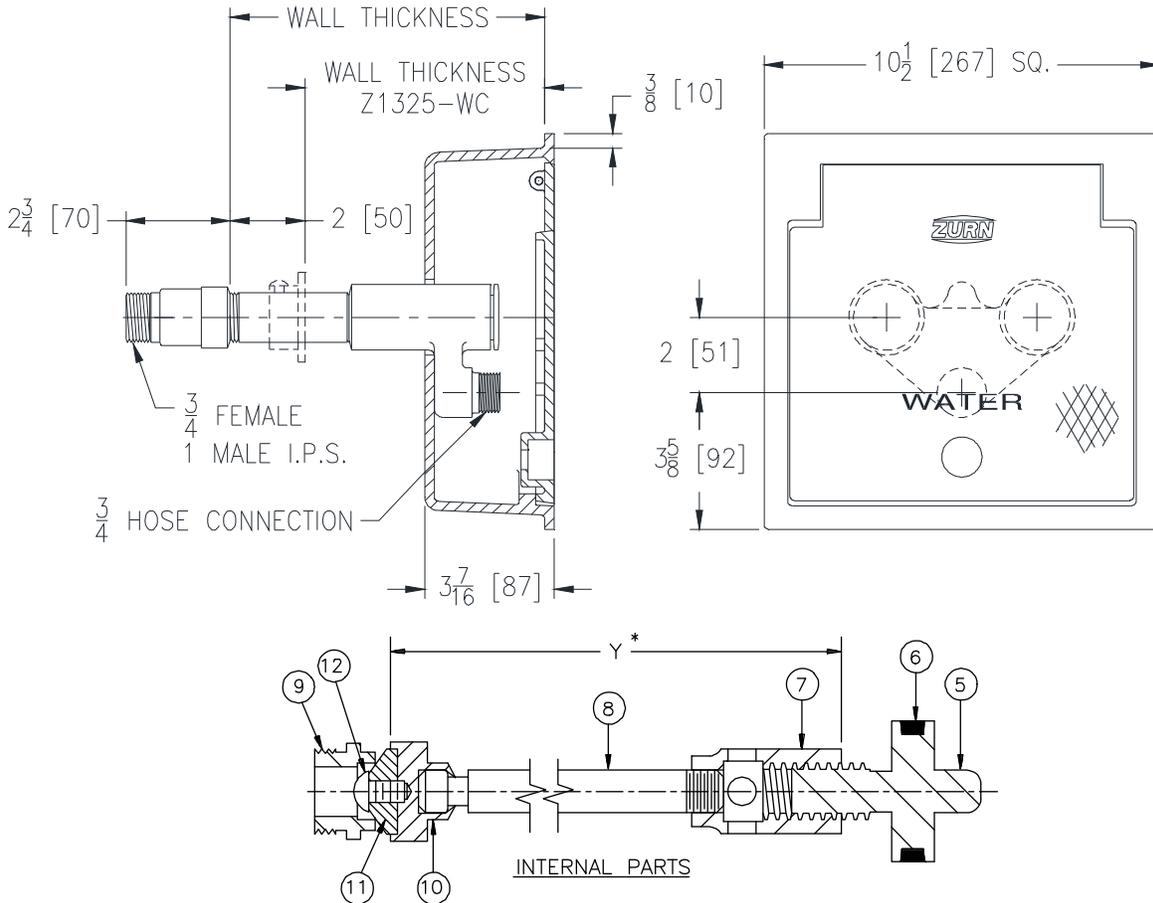

Wall Thickness Inches [mm]	Approx. Wt. Lbs. [kg]
6, 8 [152, 203]	27 [12]
10, 12, 14 [254, 305, 356]	31 [14]
16, 18 [406, 457]	35 [16]
24 [610]	39 [18]

ENGINEERING SPECIFICATION: ZURN Z1325

"Vari-Temp" combination hot and cold water, non-freeze, encased wall hydrant for flush installation. Complete with bronze casing, all bronze interior parts, non-turning operating rods with free-floating compression closure valves, replaceable bronze seat and seat washer, and combination 3/4" female or 1" male straight IP inlet. Nickel bronze box and hinged cover with operating key lock and "WATER" cast on cover.

NOTE: When (-VB) vacuum breaker suffix is specified, the vacuum breaker must be manually tripped at the end of usage to facilitate drainage of the hydrant and maintain the non-freeze feature.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -CL Cylinder Lock
- ___ -NW Narrow Wall
- ___ -PB Polished Bronze Face
- ___ -RA4 24 [610] Replacement Rod Assembly
- ___ -RK Hydrant Parts Repair Kit
- ___ -VB 3/4 [19] Adapter Vacuum Breaker
- ___ -WC Wall Clamp
- ___ -34UN 3/4 [19] IP 90° Inlet Elbow w/Union Nut

PARTS LIST

Item	Name	Quan.
5	Operating Screw	2
6	O-Ring	2
7	Operating Coupling	2
8	Operating Rod	2
9	Removable Seat	2
10	Washer Guide	2
11	Washer (neoprene)	2
12	Screw	2

* Regularly furnished unless otherwise specified.