

ECONOrail™



Double Wall Turning Vane System

Economic Double Wall System

- Can be used with a variety of double wall vane
- Economic means to install double wall rail and vane
- Easily attach vane to rail without the use of fasteners
- No special tools are required to fasten rail to duct
- Fabricated with precision equipment
- Available in specialty metals



DUCTMATE®
Industries, Inc.

ECONOrail™

Double Wall Turning Vane System

DESCRIPTION


Double wall turning vane rail.

BASIC USE

Simple means for securing double wall vane for the purpose of directing air around mitered elbows.

SPECIAL CHARACTERISTICS

Precision stamped from hot-dipped galvanized steel.
 Available from stock through a nationwide distributor network.
 Trained Ductmate personnel are available to assist with additional technical questions.
 Available in 100 ft. quantities
 Available in 22 or 24 gauge steel

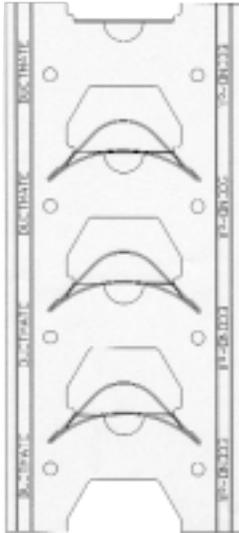

PRODUCT GUARANTEE


ECONOrail is guaranteed against defective material.

PACKAGING INFORMATION

Part No.	Gauge	For Vane Size	Ft. per carton
2ERGA22	22	2"	100 ft.
2ERGA24	24	2"	100 ft.
4ERGA22	22	4"	100 ft.
4ERGA24	24	4"	100 ft.

INSTALLATION INSTRUCTIONS

1. Measure the ductwork and cut the vane and rail to the appropriate lengths.

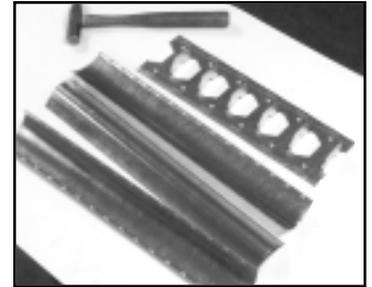

2. Align double wall vane on the two lengths of rail and press the vane into place.



3. Using a hammer, bend over the vane to secure it onto the rail.



4. Insert vane and rail assembly into the ductwork and secure using standard self-drilling screws. *Secure rail to ductwork per SMACNA standards.*



Distributed By:



E. MONONGAHELA, PA
 1502 Industrial Drive
 E. Monongahela, PA 15063-9709
 800-245-3188
 724-258-0500
 FAX: 724-258-5494

LODI, CA
 810 S. Cluff Avenue
 Lodi, CA 95240-3141
 800-344-3270
 209-333-4680
 FAX: 209-333-4678

www.ductmate.com

Ductmate is a proud member of the following organizations:

