


Access Riser — Perma-Loc™

Applications

Orengo's Access Risers provide access to septic tank openings and can be cast into the tops of concrete tanks, bonded in place, or bolted down using a riser tank adaptor. They can also be used as valve enclosures.

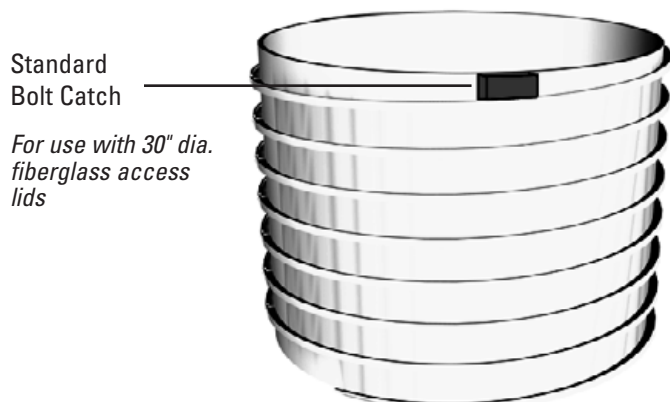


General

Orengo Perma-Loc™ Access Risers are constructed of ribbed PVC pipe and are available in 30" diameters. Access Risers come standard with bolt catches for lid fastening. Optional riser lid adapters are available in place of bolt catches. Perma-Loc Access Risers are available in one-inch increments up to 13 ft in length.

Standard Models

RR30XX

Nomenclature

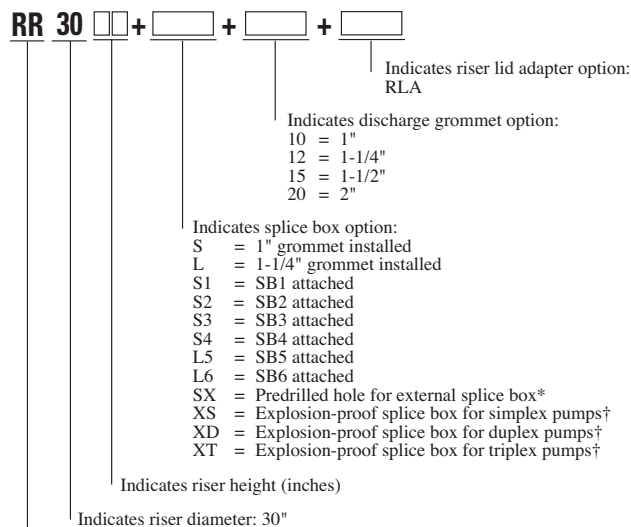

Ribbed riser

* Minimum riser height 18"

†Used in Class I Division 1 environments

Materials of Construction

Ribbed PVC pipe:	PVC
Bolt catch:	PVC
Riser lid adapter: (not shown)	ABS

Specifications

Dimensions	RR30XX
I.D.	29.50 in. (743 mm)
Wall Thickness - excluding ribs	0.20 in. (5 mm)
O.D. - including ribs	31.00 in. (787 mm)
Weight per foot (meter)	18 lb (27.8 kg)