


# PRTA ABS Tank Adapters

## Applications

PRTA tank adapters are used to provide a structural, watertight method of installing a 24- or 30-inch (600- or 750-mm) access riser over a tank opening.

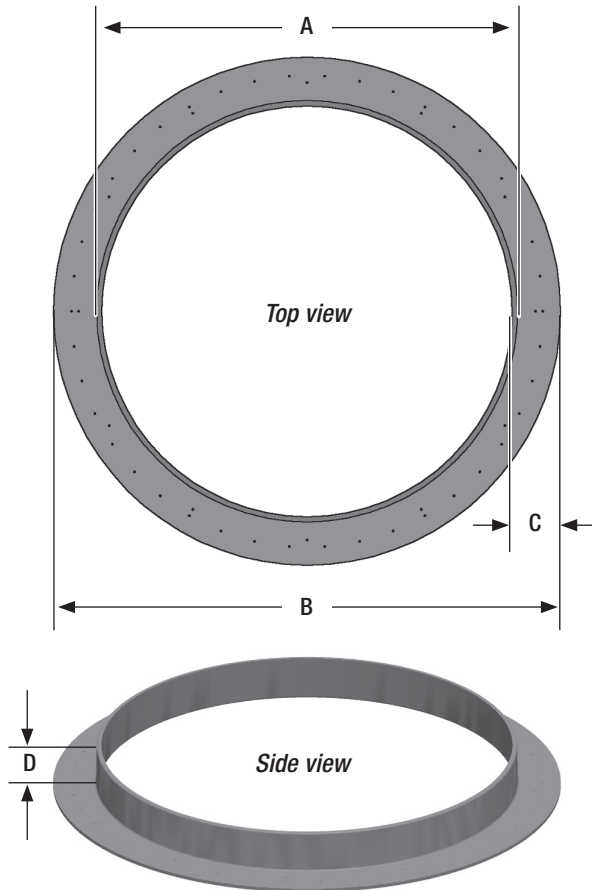

## General

Orenco's PRTA tank adapters are molded plastic products and therefore have excellent part-quality and consistency. PRTA tank adapters can be cast into a tank or fastened to the top of the tank with a bolt-down kit. The bolt-down kit consists of either six or twelve (depending on model) stainless steel concrete anchors and a roll of butyl tape.


The O.D. of the vertical flange matches the I.D. of Orenco's ribbed risers, which provides a suitable joint to seal with MA320, ADH100, SS115, or SS140 adhesive.

## Standard Models

PRTA24, PRTA30

PRTA24BDKIT (6 anchors), PRTA30BDKIT (12 anchors)

## Product Code Diagram

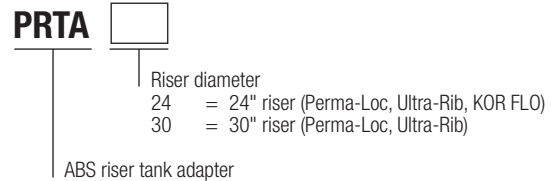

## Materials of Construction

Tank adapter	ABS
Concrete anchors	Stainless steel anchor bolts
Sealant	Butyl tape

## Specifications

Dimensions*	PRTA24	PRTA30
A - Outside dia., in. (mm)	23.38 (594)	29.25 (743)
B - Flange dia., in. (mm)	26.75 (679)	34.25 (870)
C - Horizontal flange width, in. (mm)	2.00 (51)	2.50 (64)
D - Vertical flange height, in. (mm)	3.50 (89)	3.25 (83)

\*The tank adapter has a nominal 0.25 inch (6 mm) thickness.