

DESCRIPTION

- Brass construction
- 1/2" CC or IPS connections with 1/4 turn stops
- Pressure balancing, four port, cycle valve

OPERATION

- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintain selected discharge temperature to $\pm 2^\circ\text{F}$

CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

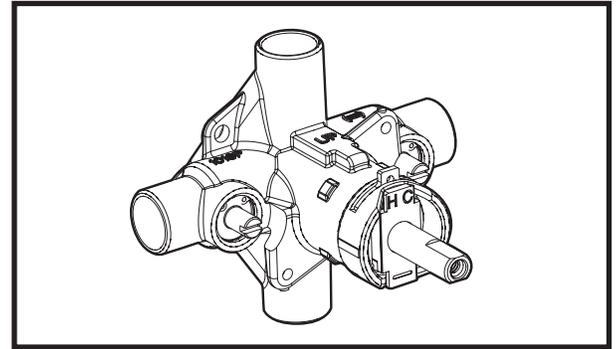

POSI-TEMP® VALVE

Pressure-Balancing Valve with 1/4 Turn Stops

Models: 2570 (CC), 2590 (IPS) - Single Pack
62370 (CC), 62390 (IPS) - Bulk Packed
(Bulk packed 12 per carton)

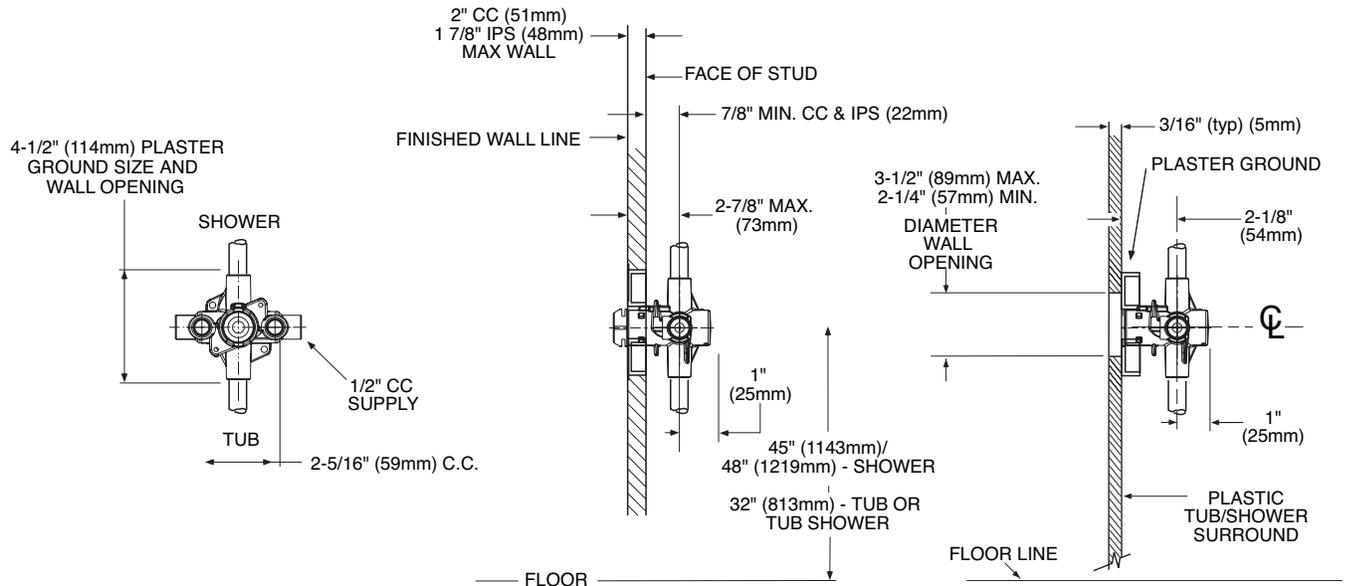

CRITICAL DIMENSIONS

(DO NOT SCALE)