

120F CAST IRON SWING CHECK VALVE

- ❖ Iron Body ❖ Bronze Seat & Resilient Disc ❖ Bolted Cover ❖ Full Waterway
- ❖ Class 125 ❖ Suitable For Vertical & Horizontal Installation
- ❖ Hibuild Epoxy Coating Inside and Outside





200 PSI NON-SHOCK COLD WOG

Applications: Irrigation, Potable Water, Turf, Golf Course,
Water Distribution, Pump Station

Conforms to MSS-SP-71

End Flanges conform to ANSI B16.1, Class 125

ISO-9002

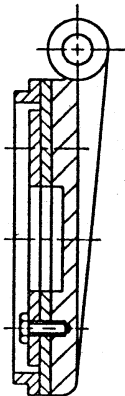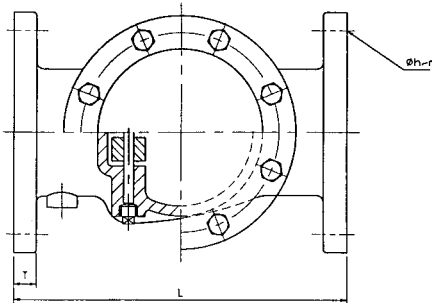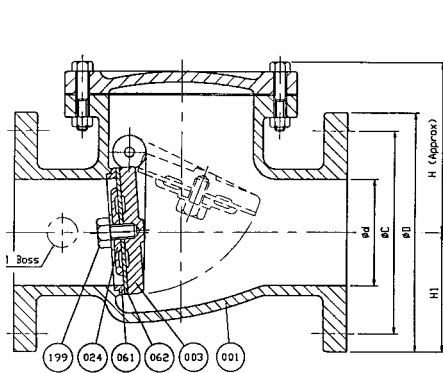

For Size 8" - 12"

MATERIAL SPECIFICATIONS

NO.	PART	MATERIAL	ASTM DESIGNATION
001	Body	Cast Iron	A 126 Class B
003	Disc	Cast Iron	A 126 Class B
014	Cover	Cast Iron	A 126 Class B
024	Seat Holder	Cast Iron	A 126 Class B
061	Body Seat Ring	Bronze	B 62
062	Disc Seat Ring	Rubber (BUNA-N)	D 2000 AA 7008
159	Hinge Pin	Stainless Steel	A 276 Type 304
166	Plug	Malleable Iron	A 47
194	Cover Bolt & Nut	Steel	A307 Grade B
199	Seat Holder Bolt	Stainless Steel	A 276 Type 304
324	Cover Gasket	Rubber (BUNA-N)	D 2000 AA 7008

DIMENSIONS & WEIGHTS

SIZE INCH	L	ANSI B16.1 CL. 125 ØD	ØC	Øh	n	T	H	H1	APPROX. WT. LBS.
2"	8.0	6.0	4.75	.75	4	.63	4.19	3.00	20
2-1/2"	8.5	7.0	5.50	.75	4	.69	4.94	3.50	31
3"	9.5	7.5	6.00	.75	4	.75	5.94	3.75	42
4"	11.5	9.0	7.50	.75	8	.94	6.69	4.50	69
5"	13.0	10.0	8.50	.88	8	.94	7.31	5.00	80
6"	14.0	11.0	9.50	.88	8	1.00	7.69	5.50	115
8"	19.5	13.5	11.75	.88	8	1.13	9.25	6.75	231
10"	24.5	16.0	14.25	1.00	12	1.19	10.69	8.00	357
12"	27.5	19.0	17.00	1.00	12	1.25	12.63	9.50	498



BREWSTER: TEL: 800-431-2082 FAX: 800-640-2252

HOUSTON: TEL: 800-935-5456 FAX: 800-683-4247

PREVIOUS

Click The Product Name Below To Return To That Index
BRASS & BRONZE VALVES CAST IRON VALVES FAUCETS

NEXT