

SHACKLE PADS

Always protect synthetic slings from hardware edges.

Shackles commonly contain screw threads and inlets to pin openings. These edges need to be guarded from contact with synthetic slings. Always use shackle pads in these areas to prevent possible equipment damage or injury to personnel from a loss of load.

Features and Benefits

Promotes Safety

- Prevents possible equipment damage or injury to personnel from a loss of load.

Saves Money

- Costs less to replace than expensive rigging hooks.

Saves Time

- Quick installation. The pad can be quickly installed using *Velcro*®.
- Lightweight construction.
- Pad may be used on either end of the shackle.



Open Shackle Pad


Shackle Size (in.)	Part Number
5/8	58SP
3/4	34SP
1	1SP
1-1/4	114SP
1-1/2	112SP
1-3/4	134SP
2	2SP
2-1/2	212SP
3	3SP

SLING HARDWARE

Screw Pin Anchor Shackles

- Carbon shackle, alloy pin.
- Type 4A, Grade A, Class 2.
- Design Factor 5:1.
- Heat treated and tempered.
- Specification: RR-C-271F.
- Hot dip galvanized.

Shackle Size D (in.)	Part Number	1Rated Capacity* (tons)		Dimensions (in.)						Weight Each (lbs.)
		CM®	Others	P	E	W	R	L	B (min.)	
3/16	316SPAS	1/2	1/3	0.25	0.29	0.38	0.57	0.88	0.58	0.06
1/4	14SPAS	3/4	1/2	0.31	0.36	0.47	0.75	1.13	0.75	0.12
5/16	516SPAS	1	3/4	0.38	0.45	0.53	0.84	1.25	0.81	0.20
3/8	38SPAS	1-1/2	1	0.44	0.52	0.66	1.00	1.40	1.00	0.30
7/16	716SPAS	2	1-1/2	0.50	0.58	0.72	1.15	1.69	1.19	0.50
1/2	12SPAS	3	2	0.63	0.70	0.84	1.34	1.94	1.38	0.75
5/8	58SPAS	4-1/2	3-1/4	0.75	0.83	1.06	1.66	2.41	1.63	1.30
3/4	34SPAS	6-1/2	4-3/4	0.88	0.95	1.28	1.94	2.84	1.89	2.30
7/8	78SPAS	8-1/2	6-1/2	1.00	1.09	1.44	2.14	3.31	2.06	3.50
1	1SPAS	10	8-1/2	1.13	1.22	1.72	2.44	3.75	2.52	5.00
1-1/8	118SPAS	12	9-1/2	1.25	1.36	1.84	2.66	4.02	2.69	7.00
1-1/4	114SPAS	14	12	1.38	1.52	2.03	3.15	4.63	2.88	9.50
1-3/8	138SPAS	17	13-1/2	1.50	1.65	2.25	3.25	5.19	3.25	12.50
1-1/2	112SPAS	20	17	1.63	1.77	2.41	3.50	5.63	3.50	17.20
1-5/8	158SPAS	24	20	1.75	1.88	2.66	3.91	6.13	4.13	23.50
1-3/4	134SPAS	30	25	2.00	2.13	2.94	4.06	6.97	4.75	27.70
2	2SPAS	35	35	2.25	2.38	3.28	4.51	7.44	5.50	39.00

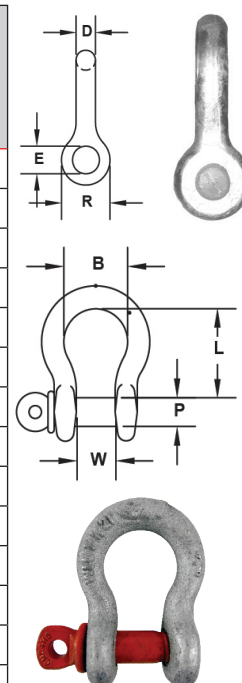

Note: Standard capacities and dimensions shown, but may vary depending on source of supply. Specify required capacity if critical.

* Rated Capacity also referred to as Working Load Limit.

2 For import SPAS, insert I at the end of the part number. Example: 316SPASI

WARNING Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Do not use slings at angles of less than 30°. Refer to the Effect of Angle chart found in the General Information section of this catalog.