

**Vulite®**

# 6" IC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

**V61CN W**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

## PRODUCT DESCRIPTION

IC Air-Loc® Housing • Energy efficient, sealed housing • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **AirLoc** do not require a gasket.

## PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected—see reverse.

**Socket** Medium base porcelain socket with nickel-plated copper screw shell • Floating socket with snap-in springs attaches to trim for installation • Shipped with socket cap to protect against paint overspray.

**Trims** Trim selection shown on reverse.

**Labels** UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • UL/cUL Listed • Trims V3040N and V3041 are wet location approved for covered ceiling applications • Trims V3034 and V3037 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

## INSTALLATION



**Bar Hangers** Telescoping bar hangers with captive nail allow for quick placement of housing anywhere within 24" O.C. joists • Can be installed in suspended ceiling grid using T-bar clip accessory • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Edge-mounted for extra strength and captive to mounting frame • May be installed either perpendicular or parallel to junction box • Locking set screw locks fixture in position • Alternate mounting holes included.

**Junction Box** Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, UL/cUL listed for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Push-in electrical connectors included.

**Mounting Frame** 24-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

**Housing** IC housing, .028" aluminum sealed for Air-Loc Compliance • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.

## DIMENSIONS

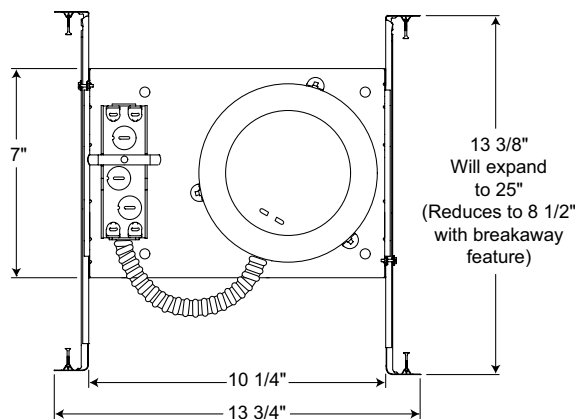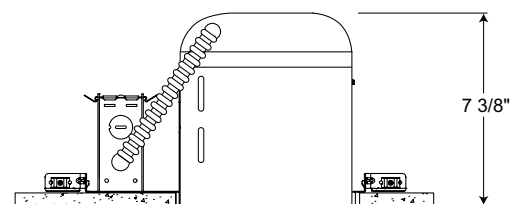

6 1/2" CEILING CUTOUT

## ACCESSORIES

Catalog No.	Description
<b>VALG6</b>	Air-Loc Gasket Kit
<b>G2405</b>	T-Bar Clips (Set of 4)

To order, specify catalog number

## PRODUCT CODES










Catalog No.	Input Voltage	Lamp Rating (max.)
<b>V61CN W</b>	120V	A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating)

# 6" IC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

**V6ICN W**

## TRIMS/LAMPS


	Cat. No.	Description	Max. Lamp Rating
 	<b>V3034 WWH◆◆</b>	Full White Baffle	40W A19 (white only), 75W PAR30, 75W PAR30L, 65W BR30, 90W BR40, 75W PAR38 (black max.), 90W PAR38 (white only)
	<b>V3034 BWH◆◆</b>	Full Black Baffle	
	<b>V3034T WWH◆◆</b>	Full White Baffle with Torsion Springs	
	<b>V3034T BWH◆◆</b>	Full Black Baffle with Torsion Springs	
 	<b>V3037 WWH◆◆</b>	Full White Cone	40W A19, 75W PAR30, 75W PAR30L 65W BR30, 75W BR40, 90W PAR38
	<b>V3037T WWH◆◆</b>	Full White Cone with Torsion Springs	
	<b>V3029 WH</b>	White Eyeball	65W BR30, 75W PAR30L
 	<b>V3040N PW◆</b>	Stippled Opal Lens Shower with Reflector	34W A19, 35W PAR30
 	<b>V3041 PW◆</b>	Drop Opal Lens Shower with Reflector	40W A19

Trim Size: Cat. Nos. V3034, V3037 - 7 $\frac{5}{8}$ " O.D., Cat. Nos. V3029 - 7 $\frac{3}{4}$ " O.D., Cat. Nos. V3040N, V3041 - 8" O.D.

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

- ◆ UL/cUL Listed for use in wet location.
- ◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.

 Vulite IC housings meet IECC Energy Code requirements per ASTM E283.  
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.