



## Commercial Storage Tank Replacement Parts List

### M-3 80, 120, & 200 Gallon Models



**Models Covered:**  
**M3ST80R5(A)**  
**M3ST120R5(A)**  
**M3ST200R5A**  
\*Denotes warranty year


***Effective: December, 2022***  
***ECO 8248-3***

**NOTE: BOTH MODEL AND SERIAL  
NUMBERS ARE REQUIRED FOR  
ORDERING REPLACEMENT PARTS**

Dimensions and specifications  
subject to change without notice.



As required by the state of California Proposition 65.

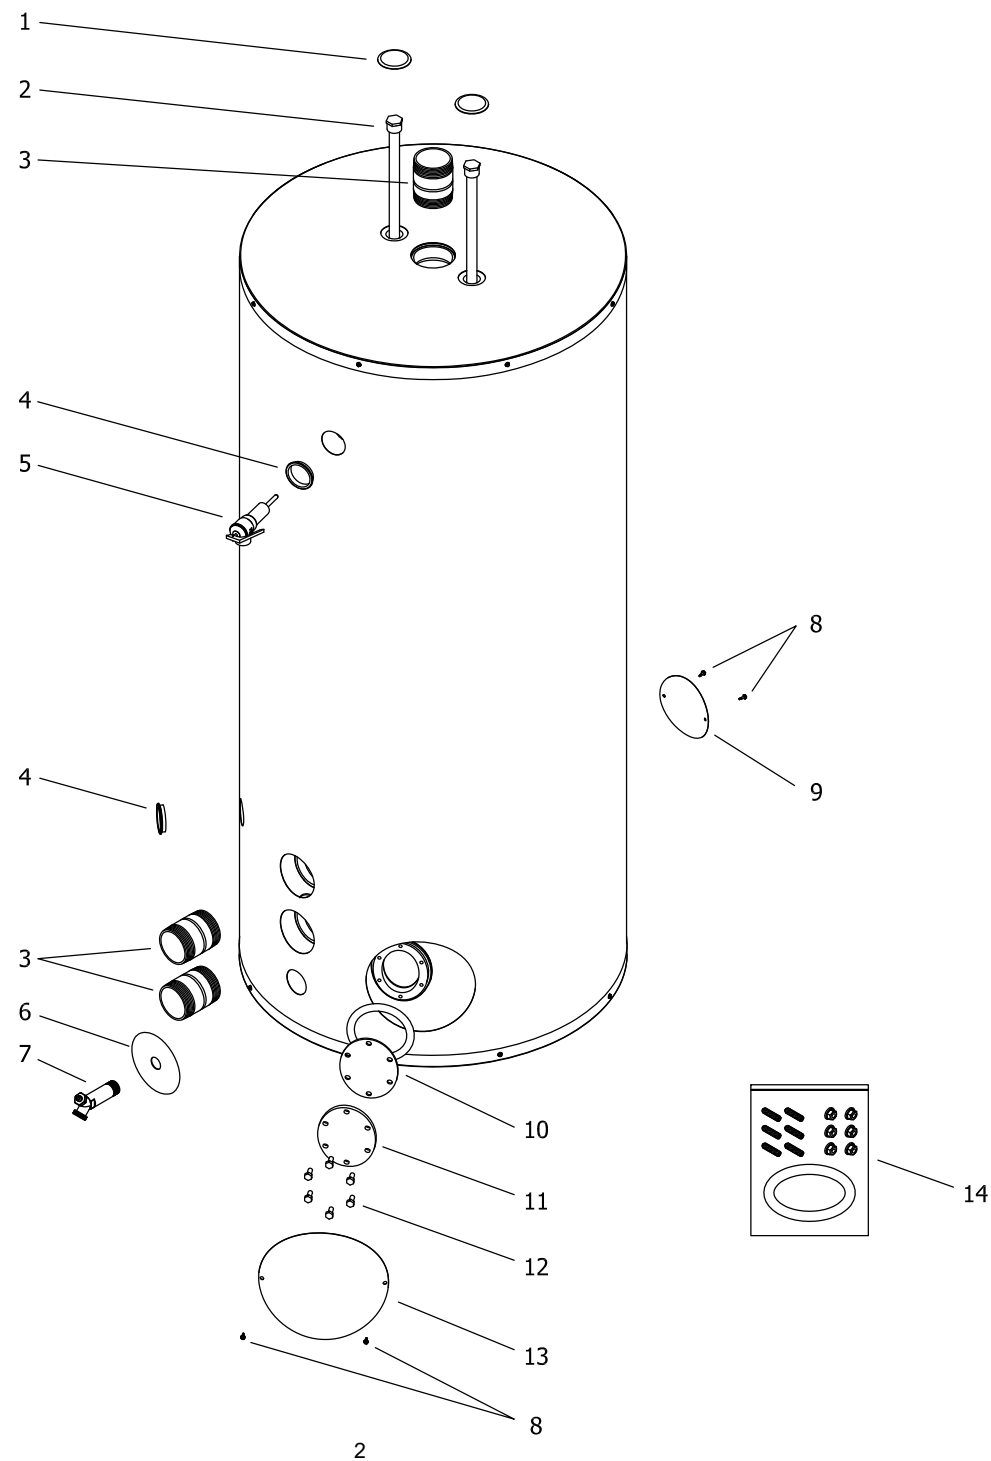

| Item | Description                                                       | Model        | Model        | Model        |
|------|-------------------------------------------------------------------|--------------|--------------|--------------|
|      |                                                                   | M3ST80R5(A)  | M3ST120R5(A) | M3ST200R5A   |
| 1    | Hole Closure                                                      | 239-31547-02 | 239-31547-02 | 239-31547-02 |
| 2    | Anode Rod (Magnesium)#                                            | 415-47782-08 | 415-47782-08 | 415-47782-12 |
|      | Anode Rod (A420) (Optional)#                                      | 415-49559-04 | 415-49559-04 | 415-49559-04 |
| 3    | Inlet/Outlet Nipple 2" NPT X 3 1/2                                | 229-32762-17 | 229-32762-17 | ---          |
|      | Inlet/Outlet Nipple 2 1/2" NPT X 3 1/2 (ASME only)                | ---          | 229-32762-22 | 229-32762-22 |
|      | Inlet/Outlet Nipple 2" NPT X 3 1/2 (Optional Brass)               | 239-44321-01 | 239-44321-01 | ---          |
|      | Inlet/Outlet Nipple 2 1/2" NPT X 3 1/2 (ASME only Optional Brass) | ---          | 239-44321-02 | 239-44321-02 |
| 4    | Trim Ring-Grey (2 pls.)                                           | 239-32793-05 | 239-32793-05 | 239-32793-05 |
| 5    | T&P Relief Valve*                                                 | ---          | ---          | ---          |
| 6    | Foam Escutcheon                                                   | 239-81470-03 | 239-81470-03 | 239-81470-03 |
| 7    | Brass Drain Valve                                                 | 415-42351-02 | 415-42351-04 | 415-42351-04 |
| 8    | Back Cover Screw #8-18 x 1/2                                      | ---          | 239-32761-00 | ---          |
|      | Back Cover Screw #8-18 x 1/2 (ASME)                               | ---          | 239-32761-00 | ---          |
| 9    | Cover Aux.                                                        | ---          | 243-47670-00 | ---          |
|      | Cover Aux. (ASME)                                                 | ---          | 243-47670-00 | ---          |
| 10   | Clean Out O-Ring Gasket                                           | 205-18427-00 | ---          | ---          |
|      | Clean Out Gasket (ASME)                                           | 205-32942-00 | 205-32942-00 | 205-32942-00 |
| 11   | Clean Out Cover                                                   | 205-18428-00 | ---          | ---          |
|      | Clean Out Cover (ASME)                                            | 205-32941-00 | 205-32941-00 | 205-32941-00 |
| 12   | Clean Out Cover Screws                                            | 239-82166-00 | ---          | ---          |
|      | Clean Out Cover Screws (ASME)                                     | 239-32970-00 | 239-32970-00 | 239-32970-00 |
| 13   | Clean Out Access Cover                                            | 243-20299-00 | 243-20299-00 | 243-20299-00 |
| 14   | Kit-Cleanout (Not For Use With ASME Tanks)                        | 415-54256-00 | 415-54256-00 | 415-54256-00 |

# Anode may need to be cut to length, please see page 4 for reference chart of anode length by model.

\* A combination temperature and pressure relief valve is required by code as a protective device. It is not normally supplied by the tank manufacturer as original equipment. It is traditionally provided by the installer and is shown here for replacement parts purposes. The T&P valve for these storage tanks must be rated for the BTU input of the heater of the system where installed. P/N 230-33630-04 T&P valve 1" NPT female thread rated for 750,000 BTU.

### **Reference Chart of Anode Length by Model**

| Model        | Hex Head Anode Cut<br>Length (End to end) |             |
|--------------|-------------------------------------------|-------------|
|              | Inches                                    | Millimeters |
| M3ST80R5(A)  | 47                                        | 1193.8      |
| M3ST120R5(A) | 47                                        | 1193.8      |
| M3ST200R5A   | 52                                        | 1320.8      |



## United States

---

**Sales** 800-523-2931

**Technical Support** 800-334-3393

**Email** [techserv@bradfordwhite.com](mailto:techserv@bradfordwhite.com)

**Warranty** 800-531-2111

**Email** [warranty@bradfordwhite.com](mailto:warranty@bradfordwhite.com)

**Service Parts** 800-538-2020

**Email** [parts@bradfordwhite.com](mailto:parts@bradfordwhite.com)

## Canada

---

**Sales & Technical Support** 866-690-0961 905-203-0600

**Fax** 905-636-0666

**Warranty** [bwccwarranty@bradfordwhite.com](mailto:bwccwarranty@bradfordwhite.com)

**Technical Support** [bwcctech@bradfordwhite.com](mailto:bwcctech@bradfordwhite.com)

**Service Parts** [orders@bradfordwhitecanada.com](mailto:orders@bradfordwhitecanada.com)

**Orders** [ca.orders@bradfordwhite.com](mailto:ca.orders@bradfordwhite.com)

For U.S. and Canada field service,  
contact your professional installer or  
local Bradford White sales representative.

## International

---

**General Contact** [international@bradfordwhite.com](mailto:international@bradfordwhite.com)