


SSM331 SERIES

1/3 HP Cast Iron Submersible Sump and Effluent Pumps

SPECIFICATIONS

Applications	Basement Sumps, Dewatering, Light Effluent	
Capacities	31 GPM	117 LPM
Shut-off Head	23'	7 m
Operation: On	9.94"	252 mm
Off	4.06"	103 mm
Solids Handling	1/2"	12.7 mm
Liquids Handling	drainage effluent	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Motor	1/3 HP	
Electrical Data	Shaded pole, 115V, 9A, 1Ø, 60Hz	
Acceptable pH Range	5-9	
Shaft Seal	type 11A, carbon & ceramic	
Housing	heavy cast iron	
Power Cord	10' (3 m), 16/3, SJTW, SJTW-A	
Discharge, NPT	1-1/2"	
Min. Sump Diameter	12"	304.8 mm

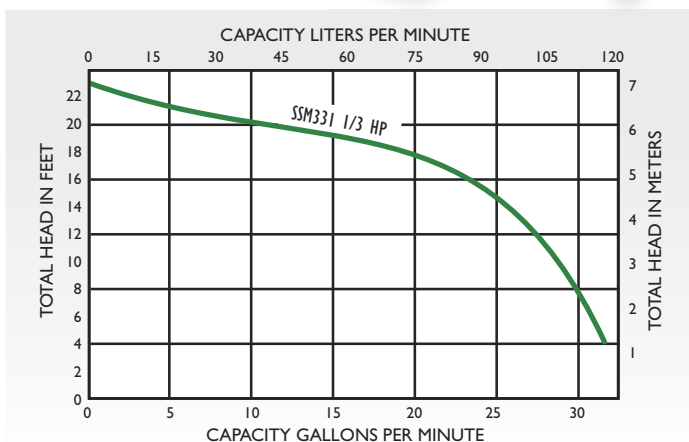

FEATURES

- Designed for light demanding drainage applications
- Removal of drainage water and light septic tank effluent
- Automatic and manual operation models available
- Maintenance-free operation
- Piggyback wide-angle or vertical mechanical switch
- Heavy-duty reliability
- Oil-filled motor for maximum heat dissipation, continuous bearing lubrication
- Recessed vortex impeller for free flow of liquids and solids
- Thermal overload protection with automatic reset
- CSA Listed