S4810

4

SUPERSEDED OR VOID DATA

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF

 \leq

CHECKED BY





LOCATION

FLOOR ACCESS COVERS

ROUND FRAME WITH SCORIATED COVER

FUNCTION: Used in concrete floors and/or surfaced areas. Scoriated covers are used where floors are subject to ordinary foot traffic and normal loadings. The secured cover should be used wherever vandalism can be a problem.

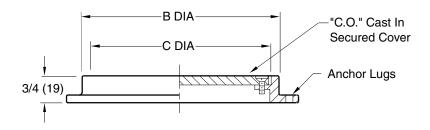


Fig. 4810 SECURED COVER eg: 4810 (-04)*

SPECIFY	PLUG	В	С
FIG.	SIZE	DIA	DIA
4810 (-04)	2 (51)	4 1/2 (115)	4 (100)
4810 (-05)	3 (76)	5 3/4 (145)	5 1/2 (140)
4810 (-06)	4 (100)	6 1/2 (165)	6 (150)
4810 (-06)	5 (125)	6 1/2 (165)	6 (150)
4810 (-08)	6 (150)	8 1/2 (215)	8 (205)
4810 (-10)	8 (205)	10 1/2 (265)	10 (255)

NOTE: Dimensions shown in parentheses are in millimeters. *Reflect's C DIA

REGULARLY FURNISHED:

Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs.

VARIATIONS:

Cover drilled in Center and furnished with 1/4" (6) - 20 x

2 1/2" (64) long screw

Smooth Top -ST Vandal Proof Screws -U

OPTIONAL MATERIALS:

☐ Polished Bronze -PB

SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

H 6-14-99 2-2-99 FEDC 1-23-96 9-5-95 7-27-94 8-16-93

DIMENSIONS ARE

REV.

-IGURE NUMBER

Chg'd Tabl e Chg'd Tabl e Chg'd Va r Added Millimeters & Chg'd Table Revised Submittal Update **DESCRIPTION**

CMD CMD BS BS BS **EMB** BS BS **EMB FMB** TWK BS CKD. BY

WEIGHT VOLUME POUNDS CUBIC FEET

FIGURE NUMBER