


## CAST IRON 45° ELL CLASS 125

| NPS   | Center to End A | Outside Dia. of Band B (min) | Length of Threads C (min) | Take Out |
|-------|-----------------|------------------------------|---------------------------|----------|
| 1/4   | —               | —                            | —                         | —        |
| 3/8   | —               | —                            | —                         | —        |
| 1/2   | 0.88            | 1.34                         | 0.43                      | 0.34     |
| 3/4   | 0.98            | 1.63                         | 0.50                      | 0.43     |
| 1     | 1.12            | 1.95                         | 0.58                      | 0.43     |
| 1 1/4 | 1.29            | 2.39                         | 0.67                      | 0.58     |
| 1 1/2 | 1.43            | 2.68                         | 0.70                      | 0.70     |
| 2     | 1.68            | 3.28                         | 0.75                      | 0.92     |
| 2 1/2 | 1.95            | 3.86                         | 0.92                      | 0.81     |
| 3     | 2.17            | 4.62                         | 0.98                      | 0.97     |
| 3 1/2 | —               | —                            | —                         | —        |
| 4     | 2.61            | 5.79                         | 1.08                      | 1.31     |
| 5     | —               | —                            | —                         | —        |
| 6     | —               | —                            | —                         | —        |

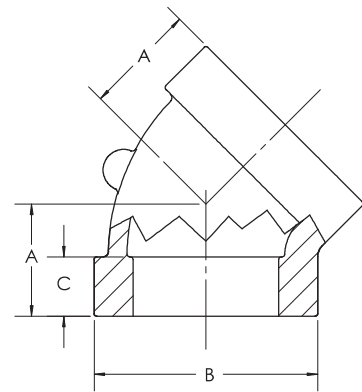

## CAST IRON STRAIGHT TEE CLASS 125

| NPS   | Center to End A | Outside Dia. of Band B (min) | Length of Threads C (min) | Take Out |
|-------|-----------------|------------------------------|---------------------------|----------|
| 1/4   | —               | —                            | —                         | —        |
| 3/8   | 0.95            | 1.12                         | 0.36                      | 0.54     |
| 1/2   | 1.12            | 1.34                         | 0.43                      | 0.58     |
| 3/4   | 1.31            | 1.63                         | 0.50                      | 0.76     |
| 1     | 1.50            | 1.95                         | 0.58                      | 0.81     |
| 1 1/4 | 1.75            | 2.39                         | 0.67                      | 1.04     |
| 1 1/2 | 1.94            | 2.68                         | 0.70                      | 1.21     |
| 2     | 2.25            | 3.28                         | 0.75                      | 1.49     |
| 2 1/2 | 2.70            | 3.86                         | 0.92                      | 1.56     |
| 3     | 3.08            | 4.62                         | 0.98                      | 1.88     |
| 3 1/2 | 3.42            | 5.20                         | 1.03                      | 2.17     |
| 4     | 3.79            | 5.79                         | 1.08                      | 2.49     |
| 5     | —               | —                            | —                         | —        |
| 6     | —               | —                            | —                         | —        |

