


Features

- Cast iron with Safeguard® finish
- Drop-in or undermount installation (K-804)
- Alcove installation with integral tile flange (K-804-L, K-804-R)
- Available with left (-L) or right (-R) drain hole
- 66" (1676 mm) x 36" (914 mm) x 24" (610 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- CSA B45.5/IAPMO Z124

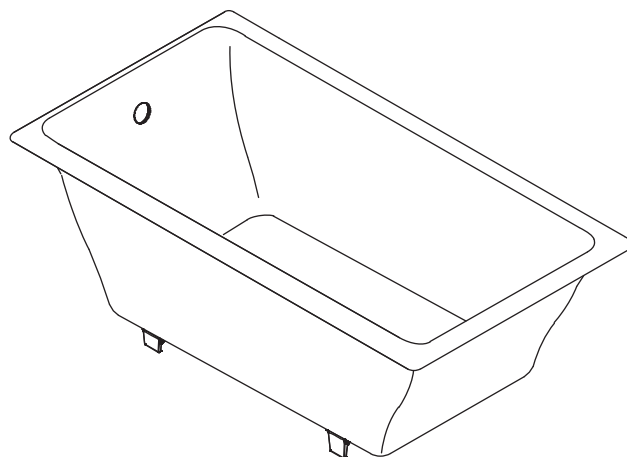

Colors/Finishes

- O: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-804	Drop-in or undermount bath	<input type="checkbox"/> O	<input type="checkbox"/> Other_____	
K-804-L	Alcove bath with integral tile flange and left hand drain	<input type="checkbox"/> O	<input type="checkbox"/> Other_____	
K-804-R	Alcove bath with integral tile flange and right hand drain	<input type="checkbox"/> O	<input type="checkbox"/> Other_____	
Required Accessory				
K-7145	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessory				
K-587	Undermount kit for installation	<input type="checkbox"/> NA		

Product Specification

The bath shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 24" (610 mm) in height. Bath shall be made of cast iron with Safeguard® finish. Bath shall be available with left (-L) or right (-R) drain hole. Bath shall be available for drop-in or undermount installation (K-804) or alcove installation with integral tile flange (K-804-L, K-804-R). Bath shall be Kohler Model K-804-____ or K-804-____-____.


Technical Information

Fixture*:	
Bathing well	
Basin area	45" (1143 mm) x 25" (635 mm)
Top area	58" (1473 mm) x 29" (737 mm)
To overflow	
Water depth	17-3/4" (451 mm)
Capacity	97 gal (367.2 L)
Weight	
440 lbs (199.6 kg)	
* Approximate measurements for comparison only.	
Cut-out template:	
Drop-in	64-1/2" (1638 mm) x 34-1/2" (876 mm)
Undermount	K-587


Installation Notes

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 77 lbs/square foot (377 kg/square meter) loading.

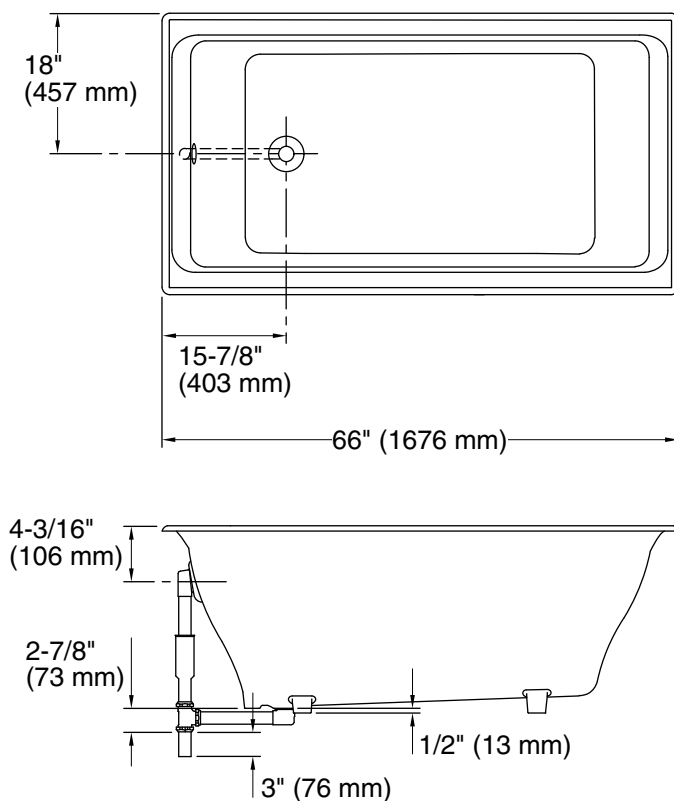

No change in measurements if connected with drain illustrated. (K-7145)

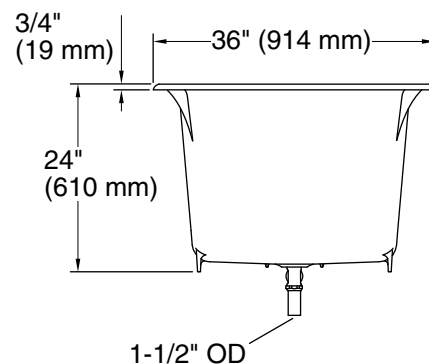

Product Diagram