

BRASS PIPE



WEIGHT OF SEAMLESS BRASS AND COPPER PIPE

Iron Pipe Sizes
REGULAR PIPE

| Pipe Size in Inches | DIMENSIONS IN INCHES | | | POUNDS PER LINEAL FOOT | |
|---------------------|----------------------|-------|----------------|------------------------|--------|
| | O.D. | I.D. | Wall Thickness | Red Brass | Copper |
| 1/8 | .405 | .281 | .062 | .253 | .259 |
| 1/4 | .540 | .376 | .082 | .447 | .457 |
| 3/8 | .675 | .495 | .090 | .627 | .641 |
| 1/2 | .840 | .626 | .107 | .934 | .955 |
| 3/4 | 1.050 | .822 | .114 | 1.27 | 1.30 |
| 1 | 1.315 | 1.063 | .126 | 1.78 | 1.82 |
| 1-1/4 | 1.660 | 1.368 | .146 | 2.63 | 2.69 |
| 1-1/2 | 1.900 | 1.600 | .150 | 3.13 | 3.20 |
| 2 | 2.375 | 2.063 | .156 | 4.12 | 4.22 |
| 2-1/2 | 2.875 | 2.501 | .187 | 5.99 | 6.12 |
| 3 | 3.500 | 3.062 | .219 | 8.56 | 8.75 |
| 3-1/2 | 4.000 | 3.500 | .250 | 11.2 | 11.4 |
| 4 | 4.500 | 4.000 | .250 | 12.7 | 12.9 |
| 5 | 5.563 | 5.063 | .250 | 15.8 | 16.2 |
| 6 | 6.625 | 6.125 | .250 | 19.0 | 19.4 |

WEIGHT OF SEAMLESS BRASS AND COPPER PIPE

EXTRA STRONG PIPE

| Pipe Size in Inches | DIMENSIONS IN INCHES | | | POUNDS PER LINEAL FOOT | |
|---------------------|----------------------|-------|----------------|------------------------|--------|
| | O.D. | I.D. | Wall Thickness | Red Brass | Copper |
| 1/8 | .405 | .205 | .100 | .363 | .371 |
| 1/4 | .540 | .294 | .123 | .611 | .625 |
| 3/8 | .675 | .421 | .127 | .829 | .847 |
| 1/2 | .840 | .542 | .149 | 1.23 | 1.25 |
| 3/4 | 1.050 | .736 | .157 | 1.67 | 1.71 |
| 1 | 1.315 | .951 | .182 | 2.46 | 2.51 |
| 1-1/4 | 1.660 | 1.272 | .194 | 3.39 | .346 |
| 1-1/2 | 1.900 | 1.494 | .203 | 4.10 | 4.19 |
| 2 | 2.375 | 1.933 | .221 | 5.67 | 5.80 |
| 2-1/2 | 2.875 | 2.315 | .280 | 8.66 | 8.85 |
| 3 | 3.500 | 2.892 | .304 | 11.6 | 11.8 |

RED BRASS 85%

Pipe with Threaded Ends
Allowable Pessure

| Standard Size (Inches) | POUNDS PER SQUARE INCH | | | |
|------------------------|------------------------|--------|--------|--------|
| | @100°F | @200°F | @300°F | @400°F |
| 1/8 | 370 | 370 | 320 | 140 |
| 1/4 | 870 | 870 | 760 | 330 |
| 3/8 | 890 | 890 | 780 | 340 |
| 1/2 | 900 | 900 | 790 | 340 |
| 3/4 | 810 | 810 | 710 | 310 |
| 1 | 630 | 630 | 560 | 240 |
| 1-1/4 | 690 | 690 | 610 | 260 |
| 1-1/2 | 630 | 630 | 560 | 240 |
| 2 | 540 | 540 | 480 | 210 |
| 2-1/2 | 450 | 450 | 390 | 170 |
| 3 | 510 | 510 | 450 | 190 |
| 3-1/2 | 570 | 570 | 500 | 220 |
| 4 | 510 | 510 | 440 | 190 |
| 5 | 410 | 410 | 360 | 160 |
| 6 | 340 | 340 | 300 | 130 |

RED BRASS 85%

Pipe with Threaded Ends
EXTRA STRONG (XS)

Allowable Internal Pressure


| Standard Size (Inches) | POUNDS PER SQUARE INCH | | | |
|------------------------|------------------------|--------|--------|--------|
| | @100°F | @200°F | @300°F | @400°F |
| 1/8 | 1960 | 1960 | 1710 | 740 |
| 1/4 | 2210 | 2210 | 1930 | 830 |
| 3/8 | 1840 | 1840 | 1610 | 690 |
| 1/2 | 1760 | 1760 | 1540 | 660 |
| 3/4 | 1510 | 1510 | 1320 | 570 |
| 1 | 1340 | 1340 | 1180 | 510 |
| 1-1/4 | 1160 | 1160 | 1020 | 440 |
| 1-1/2 | 1090 | 1090 | 960 | 410 |
| 2 | 1000 | 1000 | 870 | 380 |
| 2-1/2 | 970 | 970 | 850 | 370 |
| 3 | 910 | 910 | 790 | 340 |

⚠ WARNING: THIS PRODUCT CAN EXPOSE YOU TO LEAD, WHICH IS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM. FOR MORE INFORMATION GO TO WWW.P65WARNINGS.CA.GOV.


EVERY PRECAUTION HAS BEEN TAKEN IN PREPARING THIS PRICE SHEET, HOWEVER, MERIT BRASS COMPANY CANNOT BE HELD RESPONSIBLE FOR TYPOGRAPHICAL ERRORS OR OMISSIONS.

PLEASE NOTE, MERIT FURNISHES RED BRASS PIPE CONFORMING TO ASTM B43, DRAWN GENERAL PURPOSE TEMPER (H58); UNLESS OTHERWISE NOTED. LIGHT ANNEALED (061) TEMPER IS ALSO AVAILABLE UPON REQUEST.


SHIPPING TIMES

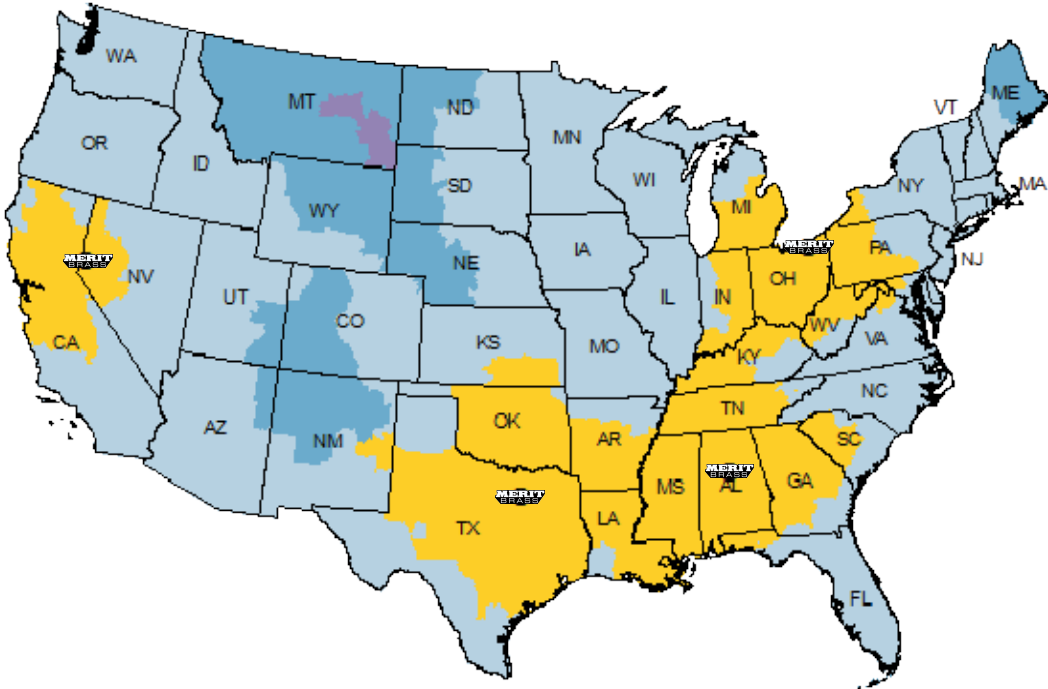


FedEx



*FedEx is Merit's Primary Carrier

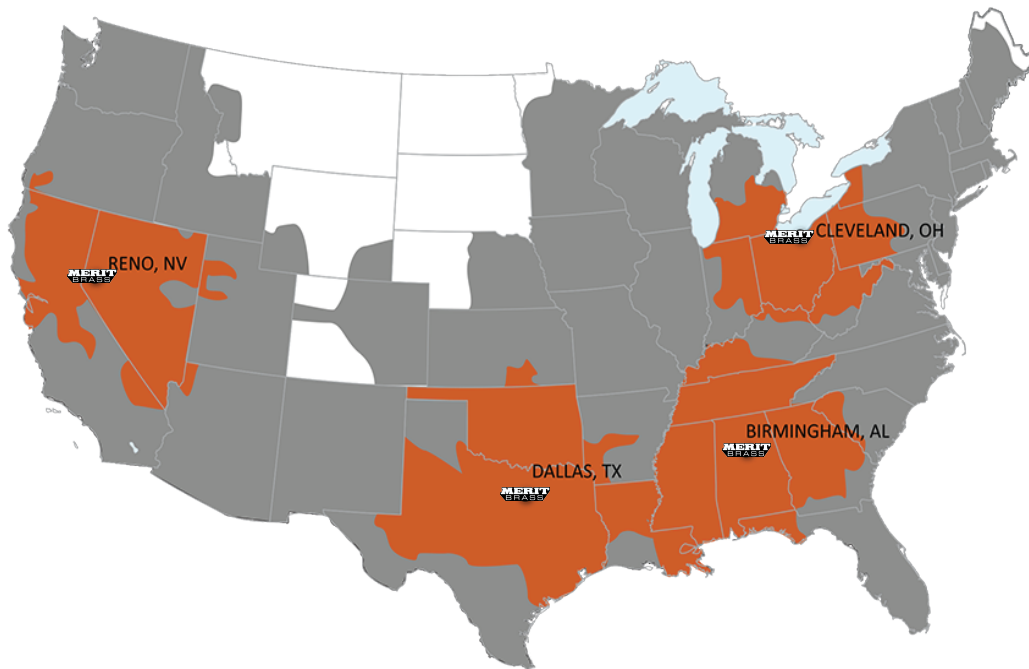

UPS



Cleveland Headquarters

One Merit Drive/PO Box 43127
Cleveland, OH 44143
800.726.9800 (t) | 800.726.9880 (f)
sales@meritbrass.com

Dallas Distribution Center

10614 King William Dr.
Dallas, TX 75220
877.259.2591 (t) | 877.259.2596 (f)
mbsalesTX@meritbrass.com

Sparks Distribution Center

200 Vista Blvd., Suite #106
Sparks, NV 89434
877.711. RENO (7366) (t) | 877.376.0093 (f)
mbsalesNV@meritbrass.com

Birmingham Distribution Center

220 Oxmoor Court
Birmingham, AL 35209
855.912.0409 (t) | 866.668.9168 (f)
mbsalesAL@meritbrass.com

Merit Brass Headquarters Has An ISO 9001:2015 Registered Quality Management System

www.meritbrass.com • www.mbwebxpress.com

Follow Us On Social Media

