
SPECIFICATIONS

Part Number TRB-2 Rough Brass
Part Number TCP-2 Polished Chrome

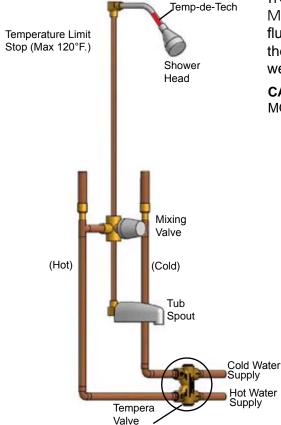

PPP

CONNECTIONS

3/16"

<u> Jlindustrias, inc.</u>

CONSTRUCTION DETAILS:

EXTERNAL: Red-Bronze cast body containing over 85% ingot copper. ASTM # B584 Alloy# C84400.

INTERNAL: Stainless steel (# 303) is used in the piston and sleeve. MAINTENANCE: A minimum is required, other than occasional flushing of foreign deposits. Of the Tempera Valve's four parts, only the balancing piston moves. This simple, compact design minimizes wear and mechanical failures.

CAUTION:

MODEL PLUMBING CODES REQUIRE HOT WATER NOT TO EXCEED 120°F.

PROJECT SUBMITTAL

Project: _____


Contractor:

Engineer: _____

Date Submitted:

Prepared By:

Tempera Valve Flow Rate

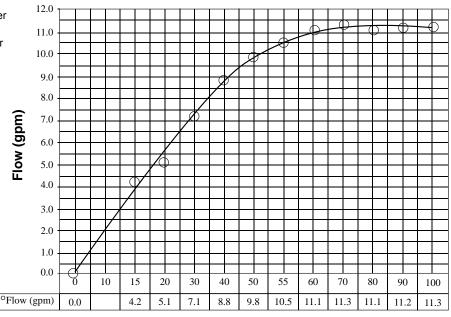

Static Supply Pressure (psig)

Precision Plumbing Products

Division of JL Industries, Inc. Airport Business Center

Prevents Thermal Shock

6807 NE 79th Court, Suite E Portland, Oregon 97218

T (503) 256-4010 F (503) 253-8165 www.pppinc.net









