

SPECIFICATIONS

FIGURE IS4CTSP - IS6CTSP

STAINLESS STEEL FITTINGS



304 & 316 STAINLESS STEEL THREADED SQUARE-HEAD PLUG


PRODUCT SPECIFICATIONS

Standards

- The material composition and quality requirements shall comply with ASTM A351/A351M
- Threads should be in accordance with ASME B1.20.1-1983

REFERENCE CHART

Item #	Size (in.)	A	B	I	Grade
IS4CTSPA	1/8	0.709	0.433	0.276	304
IS4CTSPB	1/4	0.768	0.453	0.354	
IS4CTSPC	3/8	0.787	0.551	0.378	
IS4CTSPD	1/2	0.925	0.512	0.512	
IS4CTSPF	3/4	1.181	0.709	0.720	
IS4CTSPG	1	1.299	0.787	0.748	
IS4CTSPH	1-1/4	1.535	0.886	0.906	
IS4CTSPJ	1-1/2	1.575	0.906	1.043	
IS4CTSPK	2	1.772	1.043	1.161	
IS4CTSPL	2-1/2	1.890	1.122	1.575	
IS4CTSPM	3	2.146	1.260	1.752	
IS4CTSP	4	2.362	1.476	2.343	
IS6CTSPA	1/8	0.709	0.433	0.276	316
IS6CTSPB	1/4	0.768	0.453	0.354	
IS6CTSPC	3/8	0.787	0.551	0.378	
IS6CTSPD	1/2	0.925	0.512	0.512	
IS6CTSPF	3/4	1.181	0.709	0.720	
IS6CTSPG	1	1.299	0.787	0.748	
IS6CTSPH	1-1/4	1.535	0.886	0.906	
IS6CTSPJ	1-1/2	1.575	0.906	1.043	
IS6CTSPK	2	1.772	1.043	1.161	
IS6CTSPL	2-1/2	1.890	1.122	1.575	
IS6CTSPM	3	2.146	1.260	1.752	
IS6CTSP	4	2.362	1.476	2.343	

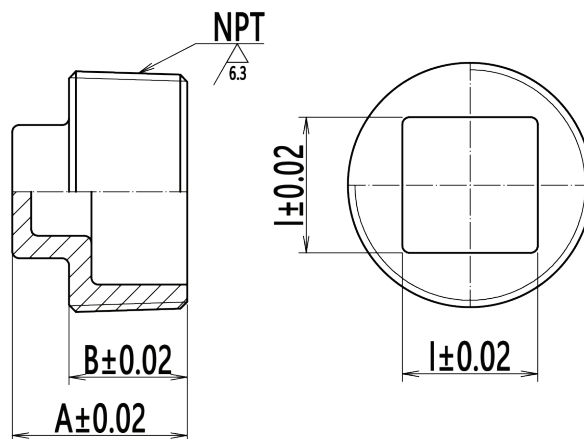

TOLERANCE—L:±0.02