


Potential Relays

MARS SERIES **191**



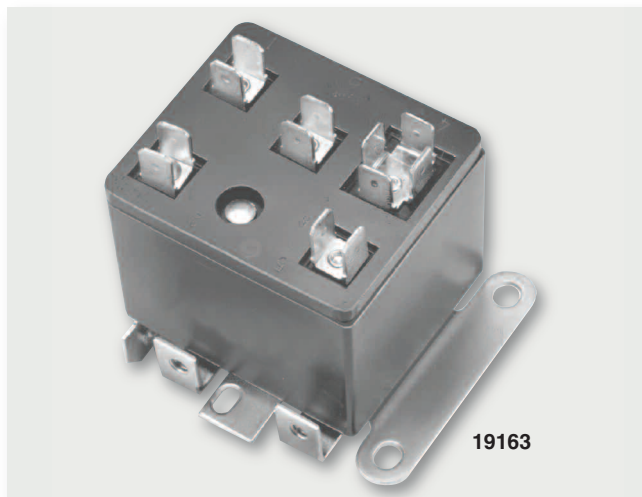


Universal Replacement Potential Relays

MARS II series relays are manufactured for the HVAC industry. These relays meet all requirements for original equipment relays. They feature a universal break-off bracket to fit your specific application.

Features:

- 50/60 cycle
- UL and CSA approved
- Contact rating 35 amp, 480 VAC
- Non-positional
- Instructions and wiring diagram included in each relay
- Universal break-off bracket on each relay, simply snap-off parts not needed

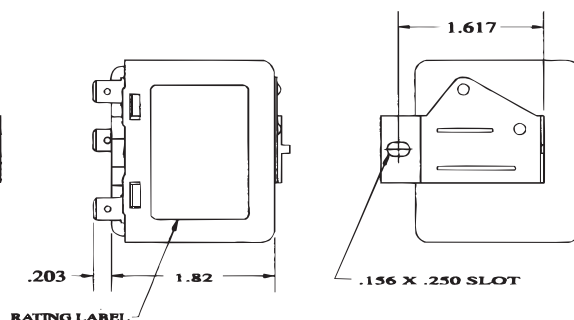

Calibration Specifications

MARS2 NO.	MARS MODEL NO	CONTINUOUS COIL VOLTAGE	PICK-UP		DROP-OUT MAX
			MIN.	MAX.	
19163	MARS II 163	170	139	153	55
19164	MARS II 164	395	260	275	120
19165	MARS II 165	332	168	182	90
19166	MARS II 166	395	215	225	120
19167	MARS II 167	420	295	315	125
19168	MARS II 168	502	325	345	135
19169	MARS II 169	332	180	193	105
19170	MARS II 170	253	285	305	77
19171	MARS II 171	420	212	232	121