


Transformers

MARS SERIES **503**

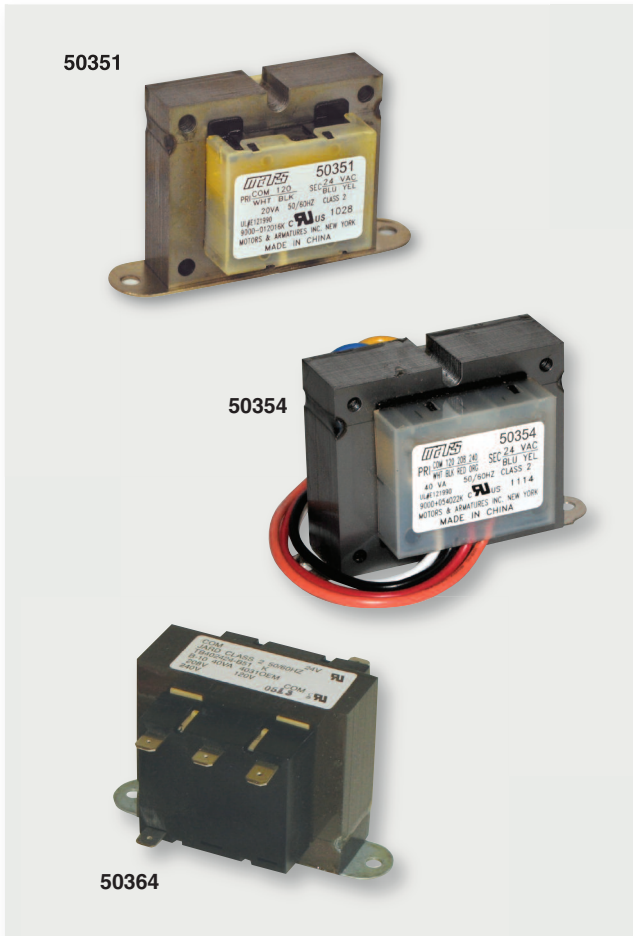

MARS Control Transformers NEMA Class II Open Construction

MARS compact open construction transformers are less than 2 1/4" in height. This makes them ideal as replacements within existing equipment.

MARS control transformers are available with various outputs and voltages for special applications.

Application:

Provide power source for control circuit for air conditioning, heating, or refrigeration systems.

Features:

- UL class 2 recognized
- Low heat rise
- Primary color coded leads
- Secondary color coded leads, or 1/4" male quick connects
- Foot-mount

Foot-Mount Open Construction

MARS NO.	FORMER MARS JARD NO.	JARD NO.	VA RATING	HZ	PRIMARY VOLTAGE	PRIMARY CONNECTIONS	SECONDARY VOLTAGE	SECONDARY CONNECTIONS
50351	-	-	20	50/60	120	Color coded leads	24	Color coded leads
50352	44502	4011F	40	50/60	120	Color coded leads	24	Color coded leads
50353	44503, 44506	4021F, 40241F	40	50/60	208/240	Color coded leads	24	Color coded leads
50354	44504	4031F	40	60	120/208/240	Color coded leads	24	Color coded leads
50355*	-	-	40	60	120	Color coded leads	12/24	Color coded leads
50350	44501	2031F	20	50/60	120/208/240	Color coded leads	24	Color coded leads
50357	44507	40271F	40	50/60	277	Color coded leads	24	Color coded leads
50359 ⁽¹⁾	44505	4032F	40	50/60	120/208/240	Color coded leads	24/12/2.5	Color coded leads
50308	44508	5031F	50	50/60	120/208/240	Color coded leads	24	Color coded leads

* Not UL listed

(1) In line fuse protection

Foot-Mount Open Construction With Primary & Secondary Quick Connects

MARS NO.	FORMER MARS JARD NO.	JARD NO.	VA RATING	HZ	PRIMARY VOLTAGE	PRIMARY CONNECTIONS	SECONDARY VOLTAGE	SECONDARY CONNECTIONS
50362	-	-	40	50/60	120	1/4" Male quick connects	24	1/4" Male quick connects
50364	44517	40310OEM	40	50/60	120/208/240	1/4" Male quick connects	24	1/4" Male quick connects
50363	-	-	50	50/60	208/240	1/4" Male quick connects	24	1/4" Male quick connects