

Features

- Vitreous china.
- Elongated bowl.
- 1-1/2" top spud.
- 10" (254 mm) or 12" (305 mm) rough-in.
- 2-1/4" (57 mm) passageway.
- 11-3/8" (289 mm) x 10-3/8" (264 mm) water area.
- 1.6 gpf (6 lpf).
- 26" (660 mm) x 14-1/2" (368 mm) x 17-1/2" (445 mm).

Recommended Accessories

- K- 4654-A Commercial Toilet Seat
- K- 4670-C Commercial Toilet Seat
- K- 4670-CA Commercial Toilet Seat
- K- 10674 Wave DC 1.6 GPF WC Flushometer
- K- 10957 Tripoint™ DC 1.6 GPF WC Flushometer
- K- 13516 Manual 1.6 GPF WC Flushometer

Components

Additional included component/s: Spud, and Bolt cap accessory pack.



ADA CSA B651

Codes/Standards

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651


KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|--------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |
|  | 7 | Black Black™ |

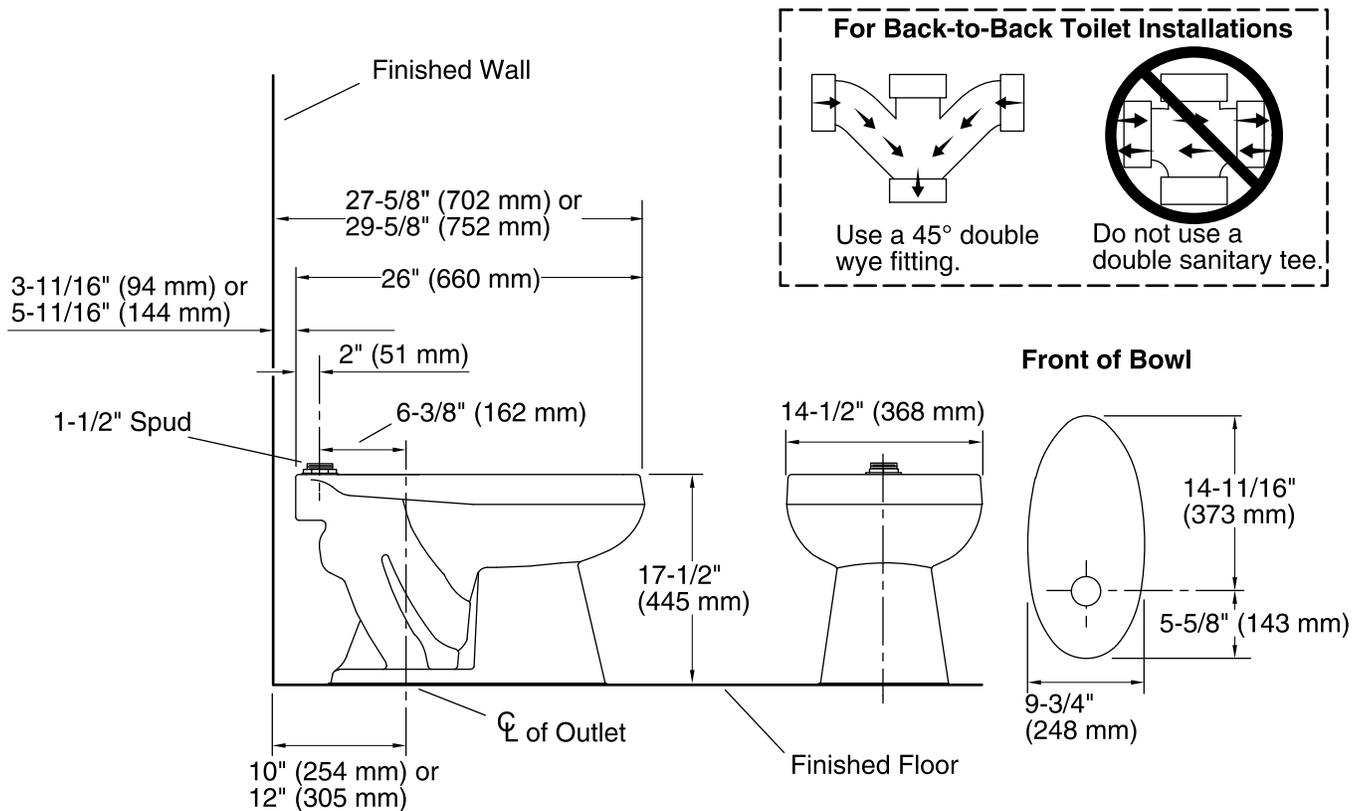

Technical Information

All product dimensions are nominal.

| | |
|-----------------------|-------------------------------------|
| Bowl shape: | Elongated front |
| Spud size: | 1-1/2", Inlet, Top |
| Trap passageway: | 2-1/4" (57 mm) |
| Water surface size: | 11-3/8" x 10-3/8" (289 mm x 264 mm) |
| Rim to water surface: | 6" (152 mm) |
| Rough-in: | 10" or 12" (254 or 305 mm) |
| Seat-mounting holes: | 5-1/2" (140 mm) |

Fixture Supply Requirements

| | |
|----------------------|--------------------|
| Min static pressure: | 35 psi (241.3 kPa) |
| Max static pressure: | 80 psi (551.6 kPa) |
| Min flow rate: | 25 gpm (94.6 lpm) |

Notes

Install this product according to the installation guide.

Refer to manufacturer and local codes for flushometer requirements: for 12" (305 mm) rough-in, sweat extension nipple is required.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.