

7K-100 SERIES

Full Port Ball Valve with Drain


Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The Apollo® 7K Series is a full port ball valve with mounting pad and drain.

FEATURES

- Adjustable Packing
- Blow-Out Proof Stem Design
- RPTFE Seats and Stuffing Box Ring
- Chromium Plated Ball
- Mounting Pad for easy Actuator Mounting

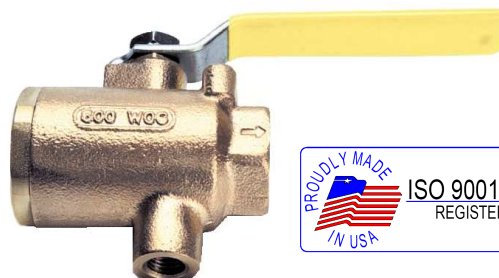

PERFORMANCE RATING

- 0-125 psig
- +50°F to 200°F

MODELS

- | | |
|--|-----------------|
| ☐ 7K-100 Series | Standard |
| ☐ 7K-150 Series | Balancing Stop |
| ☐ 7K-190 Series | Locked Retainer |


STANDARD MATERIALS LIST

Part Name	Material
Lever and Grip	Steel, Zinc Plated w/ Vinyl
Stem Packing	RPTFE
Stem Bearing	RPTFE
Ball	B16, Chrome Plated
Seat (2)	RPTFE
Retainer	B16 (1/4" to 1"), B584-C84400 (1 1/4" to 2 1/2")
Gland Nut	B16
Stem	B16
Lever Nut	Steel, Zinc Plated
Body Seal (1 1/4" to 2 1/2")	PTFE
Body	B584-C84400

APPROVALS

- MSS SP-10; Ball Valves, Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends
- Federal Specification: WW-V-35C, Type: II, Composition: BZ, Style: 3
- CRN: OC10908.5C

DIMENSIONS

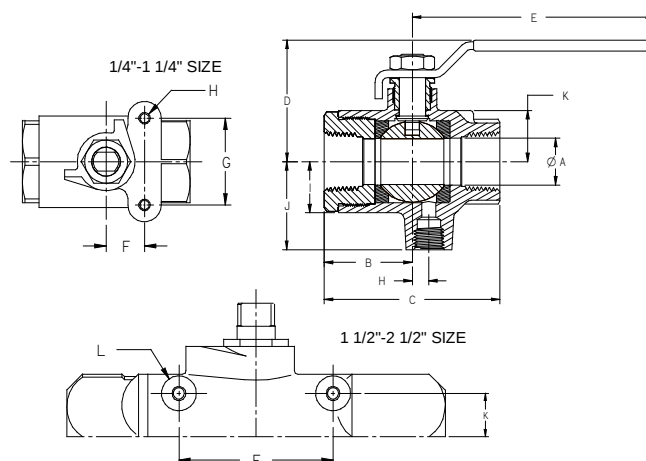


Model Number	Size (in.)	Dimensions							
		A	B	C	D	E	F	G	H
7K-101	1/4"	0.43	1.12	2.25	1.81	3.87	0.50	1.12	10-24 NC
7K-102	3/8"	0.50	1.12	2.25	1.81	3.87	0.50	1.12	10-24 NC
7K-103	1/2"	0.50	1.12	2.25	1.81	3.87	0.50	1.12	10-24 NC
7K-104	3/4"	0.81	1.56	3.12	2.12	4.87	0.87	1.37	10-24 NC
7K-105	1"	1.00	1.81	3.62	2.62	5.50	0.93	1.50	1/4-20 NC
7K-106	1 1/4"	1.25	2.12	4.25	2.87	5.50	0.93	1.50	1/4-20 NC
7K-107	1 1/2"	1.50	2.37	4.75	3.34	8.00	2.08	3.06	5/16-24 NF
7K-108	2"	2.00	2.65	5.37	3.71	8.00	2.41	3.52	5/16-24 NF
7K-109	2 1/2"	2.50	3.25	6.50	4.12	8.00	2.75	3.37	1/4-20 NC



7K-100 SERIES

Full Port Ball Valve with Drain

FLOW CHARACTERISTICS

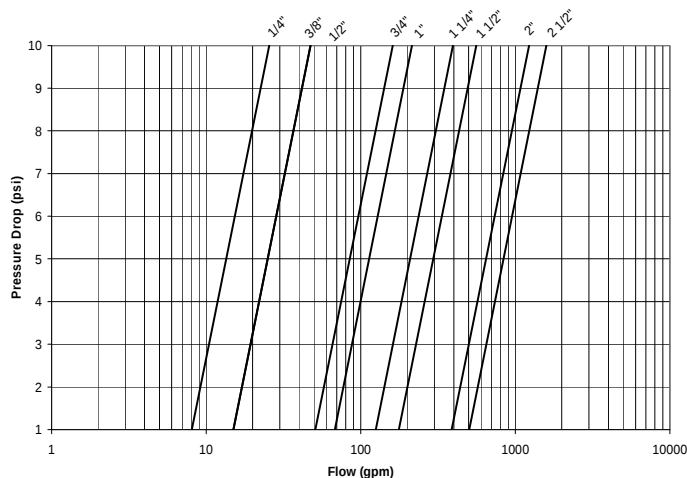

OPTIONS & SIZES

☐ (-02) Stem Grounded	1/4" - 2 1/2"
☐ (-03) 1 1/4" CS Stem Extension	1/4" - 2 1/2"
☐ (-04) 2 1/4" CS Stem Extension	1/4" - 2 1/2"
☐ (-07) Steel Tee Handle	1/4" - 1 1/4"
☐ (-08) 90° Reversed Stem	1/4" - 2 1/2"
☐ (-10) SS Lever & Nut	1/4" - 2 1/2"
☐ (-15) Wheel Handle, Steel	1/4" - 1 1/4"
☐ (-16) Chain Lever-Vertical	3/4" - 2 1/2"
☐ (-17) Rough Chrome Plated	1/4" - 2 1/2"
☐ (-18) Plain Yellow Grip	1/4" - 2 1/2"
☐ (-24) Graphite Packing	1/4" - 2 1/2"
☐ (-27) SS Latch-Lock Lever & Nut	1/4" - 2 1/2"
☐ (-30) Cam-Lock & Grounded	1/4" - 1 1/4"
☐ (-32) SS Tee Handle & Nut	1/4" - 1 1/4"
☐ (-35) VTFE Trim	3/4" - 2"
☐ (-40) Cyl-Loc & Grounded	1/4" - 1 1/4"
☐ (-45) Less Lever & Nut	1/4" - 2 1/2"
☐ (-46) Latch Lock Lever-Lock Closed Position Only	1/4" - 2 1/2"
☐ (-47) SS Oval Latch-Lock Handle & Nut	1/4" - 3/4"
☐ (-48) SS Oval Handle (No Latch) & Nut	1/4" - 2"
☐ (-49) Assembled Dry	1/4" - 2 1/2"
☐ (-50) 2-1/4" CS Locking Stem Extension	1/4" - 2 1/2"
☐ (-56) MPTFE Seats and Packing	1/4" - 2 1/2"
☐ (-57) Oxygen Cleaned	1/4" - 2 1/2"
☐ (-58) Chain Lever-Horizontal	3/4" - 2 1/2"
☐ (-60) Static Grounded Ball & Stem	1/4" - 2 1/2"
☐ (-61) Grounded Ball & Stem, Assembled dry	1/4" - 2 1/2"
☐ (-63) NPT x Solder/Socket weld	1/4" - 2 1/2"

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28106 USA; www.apollovalves.com ; 704-841-6000

Conbraco Industries can accept no responsibility for possible errors in this document and reserves the right to alter its product design or construction without notice and without incurring any obligation to make such changes on Conbraco products previously or subsequently sold.

All product specifications are approximate and are provided for reference only.