


NDS 6" Round Valve Boxes

Specifications: NDS 6" round valve boxes and covers are injection molded of recycled polyolefin material with a melt index between 10-12. Coloring and UV stabilizers are added, along with processing lubricants when needed. The 6" round body shall be tapered and have a minimum wall thickness of .130". The body shall have a double wall at the top cover seat area with a minimum thickness of .125". The bottom of the body shall have a .250" flange. The 6" round cover shall have an average thickness of .150".

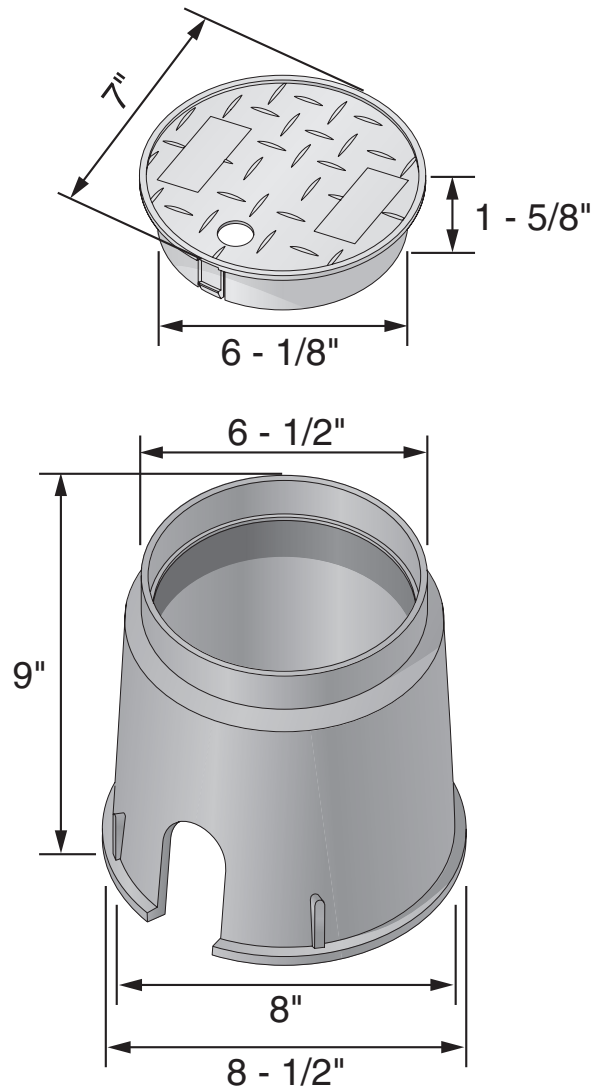

2-1/4" x 2-3/4" Pipe Slot

Part Number	Box Description	Cover Description - Marking	Color (Box/Cover)	Pallet Qty	Weight Ea
Box & Cover					
D109-G	6" Round Box	Round Cover - ICV	Black/Green	600	1.20
D109-P	6" Round Box	Round Cover - Reclaimed Water	Black/Purple	600	1.21
D109-GBOX	6" Round Box	Round Cover - ICV	Black/Green	36 Box /900	1.20
Cover Only				Pall.	
D109-GL		6" Round Cover - ICV	Green	600	0.40
D109-PL		6" Round Cover - Reclaimed Water	Purple	600	0.40
Box Only					
D109-B/O	6" Round Box		Black	600	0.80

Call for additional options and availability

Properties of Unfoamed Resin

	ASTM Test Method	Polyolefin
Tensile Strength Yield	ASTM D 638	3400-4400 PSI
Density	ASTM D 792	.900-.956
Notched Izod Impact Strength	ASTM D 256	1.5-15 ft. lbs/in.
Heat Deflection Temperature @ 66 PSI, Degrees F.	ASTM D 648	150-212 degrees F.

Shipping Configuration

	Box & Cover
Pallet	600
Pieces per Stack	24
Stack per Pallet	25
Pallet Dimensions	42"x48"x53"



NDS Technical Services

851 N. Harvard Ave
Lindsay, CA 93247
Phone: (888) 825-4716
(559) 562-9888
Fax: (800) 726-1998
(559) 562-4488

TechService@ndspro.net

www.NDSPRO.com