

Supply Plenum Adapter

General

All *Unico System* supply plenum adapters feature a rectangular to round transition. The UPC-61-X (See table below for Part number match-up.) allows air to transition gradually from the blower outlet to the main plenum.

| Supply Adapter | Matching Blower Module |
|----------------|------------------------|
| UPC-61-1218 | M1218 |
| UPC-61-2430 | MB2430x |
| UPC-61-3642 | MB3642x |
| UPC-61-4860 | MB4860x |

Supply Adapter Construction


The supply adapter is constructed of 28 gauge galvanized steel. The supply adapter is insulated with 1-in (25-mm) thick blanket fiberglass which is shipped loose with the supply adapter. See Dimension drawing. Pre-fabricated holes allow for easy installation on the front of the blower module.




IL00289.cmv

Figure 1. UPC-61-1218

| | | Model, UPC-61- | | | |
|-------------------------|---|----------------|------------|------------|-------------|
| | | 1218 | 2430 | 3642 | 4860 |
| Dimension, inch (mm) | A | 6.5 (165) | 6 (152) | 7.16 (182) | 10.13 (257) |
| | B | 3.25 (83) | 6.38 (162) | | |
| | D | 7 (178) | | 9 (229) | 10 (254) |
| | L | 12 (305) | | 18 (457) | |



AIRFLOW →

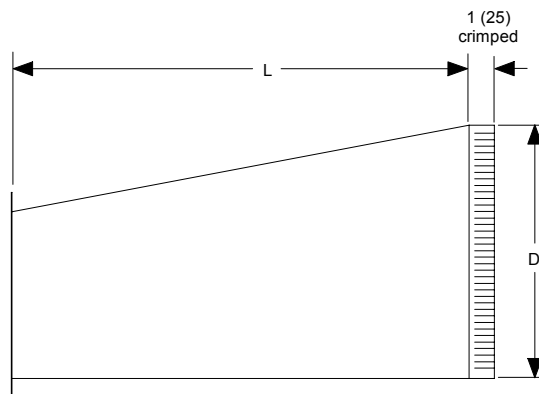

IL00286.cmv