



**Precision Plumbing Products**  
*"Specify with Confidence - Install with Pride"*

METAL OR PLASTIC LAUNDRY BOX INSTALLATION

INSTALLATION:

[www.pppinc.net](http://www.pppinc.net)

The Laundry Box is supplied with valves and water hammer arrestors. A 2" rubber drain pipe grommet is included with the metal box assembly. The plastic box has a 2" DWV female fitting where the drain pipe should be pushed through and solvent welded into the plastic tailpiece.


Position the box between studs to desired height. Nail or screw the mounting ears to the studs.

Slide the box out until the front side of the box will be flush with the first layer of sheetrock or fire board.

Tighten the mounting ears screws firmly. This must be done prior to sheetrock installation. Sheetrock thickness (3/8", 1/2", 5/8").

Install drain pipe.

Make plumbing connections to both the hot and cold valves. **USE CAUTION WHEN APPLYING HEAT DURING THE PLASTIC LAUNDRY BOX INSTALLATION.**

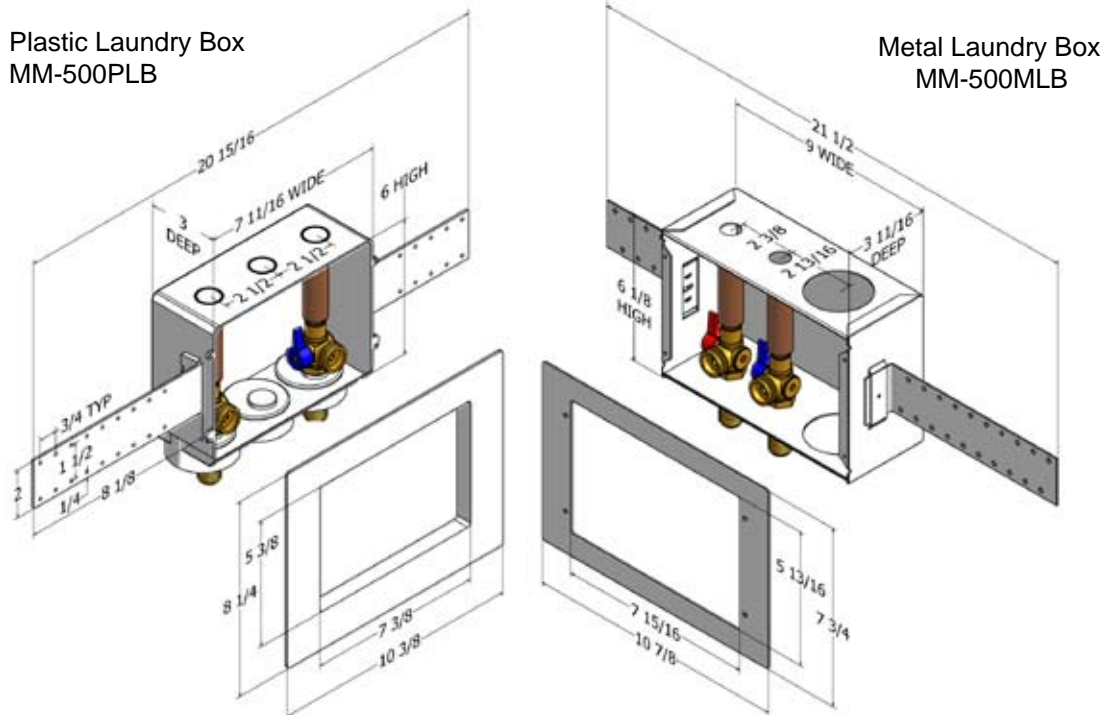

**Precision Plumbing Products**  
 Division of JL Industries, Inc.

Airport Business Center  
 6807 NE 79th Court, Suite E  
 Portland, Oregon 97218

T (503) 256-4010  
 F (503) 253-8165

[www.pppinc.net](http://www.pppinc.net)



Made in the USA.  
 We do not export labor.

