

---

# NORDSTROM VALVES®

---

## IRON PLUG VALVES

---

AN ISO 9001 REGISTERED COMPANY



*Nordstrom Valves*

# Table of Contents

- About This Catalog ..... 2
- Accessories
  - Actuators ..... 35
  - Gearing ..... 36
  - Locking Devices ..... 37
  - Square Adapters ..... 39
  - Wrenches ..... 38
- Advantages of Nordstrom Plug Valves ..... 7
- Catalogs ..... 2
- Conformance to Specifications ..... 34
- Customer Assistance ..... 44
- Dimensional References ..... 12-33
- Drilling Templates and Flange Dimensions ..... 40, 41
- Figure Number Explanation ..... 2
- Figure Number Index ..... 3
- Gas Safety Control Valve ..... 35
- Integral Locking System Valves ..... 36
- Materials of Construction
  - Super Nordstrom Two-Bolt Cover-Type Valve ..... 43
  - Nordstrom Bolted Gland-Type Valve ..... 43
  - Nordstrom Screwed Gland-Type Valve ..... 43
- Nordstrom Iron Plug Valves ..... 4, 5
- Operating Temperatures (maximum) ..... 42
- Pascal's Law ..... 8
- Pattern Descriptions ..... 8
- Pressure/Temperature Ratings ..... 42
- Principal Features
  - Super Nordstrom Two-Bolt Cover-Type Valve ..... 9
  - Nordstrom Bolted Gland-Type Valve ..... 10
  - Nordstrom Screwed Gland-Type Valve ..... 11
- Quality ..... 6
- Sealant Fittings ..... 36
- Test Times and Pressures ..... 42
- Working Pressure Index ..... 3

**Upper dimensions and weights are in inches and pounds. Lower dimensions and weights are in millimeters and kilograms.**

## About This Catalog

Every attempt has been made to make the data in this catalog as accurate as possible. Flowserve reserves the right to make product modifications which contradict the contents of this catalog without notification to its holders. Flowserve cannot be held responsible for any data which is found to be inaccurate or incomplete.

## Other Valve and Valve Related Publications

- Nordstrom Multiport Valves
- Nordstrom Polyvalve® Polyethylene Valves
- Nordstrom Steel Plug Valves
- Nordstrom Sealant and Sealant Equipment
- Nordstrom Valves For Water and Wastewater Service

## Valve Figure Number Explanation

Valve figure numbers ending in a 4 or 5 indicate wrench-operated valves. (Valve figure numbers ending in a 4 indicate threaded ends. Valve figure numbers ending in a 5 indicate flanged ends.)

Valve figure numbers ending in a 9 indicate flanged ends with worm gear operator.

## Glossary of Terms Used on Valve Dimension Tables:

**CWP** (Cold Working Pressure) is the maximum service pressure permitted in the ambient temperature range -20°F to +100°F (-29°C to +38°C). CWP is expressed in psig (pounds per square inch gage).

**DN** (Diameter Nominale) an indication of nominal diameter.

**Test** is the Hydrostatic Shell Test Pressure. (See chart on page 42.)

# Nordstrom Iron Plug Valves

## Valve Figure Number Index

<b>Figure Number . . . .Page</b>	<b>Figure Number . . . .Page</b>	<b>Figure Number . . . .Page</b>	<b>Figure Number . . . .Page</b>
114 . . . . .15	169 . . . . .21	524 . . . . .23	1585 . . . . .28
115 . . . . .15	185 . . . . .18	525 . . . . .23	1589 . . . . .28, 29
142 . . . . .12	189 . . . . .18	824 . . . . .30	2815 . . . . .31
143 . . . . .12, 13	214 . . . . .19	825 . . . . .30	2865 . . . . .31
149 . . . . .14	265 . . . . .26	1169 . . . . .16, 17	23144 . . . . .33
164 . . . . .20	269 . . . . .27	1485 . . . . .24	24191 . . . . .32
165 . . . . .20	305 . . . . .22	1489 . . . . .24, 25	

## Valve Working Pressure Index

Working Pressures	Type of Operation	Pattern	Nominal Size	Page No.
<b>STRAIGHTWAY VALVES</b>				
120 CWP (8.3 bar)	Worm Gear	Venturi	30 & 36 (DN 750 & 900)	17
150 CWP (10.3 bar)	Worm Gear	Venturi	14 - 24 (DN 400 - 600)	17
200 CWP (13.8 bar)	Wrench	Short (Gate Length)	½ - 5 (DN 15 - 125)	12
	Wrench	Short (Gate Length)	6 - 10 (DN 150 - 250)	13
	Worm Gear	Short (Gate Length)	6 - 12 (DN 150 - 300)	14
	Wrench & Worm Gear	Short (Gate Length)	6 - 10 (DN 150 - 250)	18
	Worm Gear	Venturi	6 - 12 (DN 150 - 300)	16
	Wrench	Regular	½ - 4 (DN 15 - 100)	15
	Worm Gear	Regular	4 - 12 (DN 100 - 300)	21
	Wrench	Regular	4 - 8 (DN 100 - 200)	20
	Wrench	Compression Ends	6 (DN 150)	32
	Wrench	Grooved Ends	2 - 4 (DN 50 - 100)	33
300 CWP (20.7 bar)	Worm Gear	Venturi	16 - 24 (DN 400 - 600)	25
400 CWP (27.6 bar)	Wrench	Short	1 & 2 (DN 25 & 50)	19
	Wrench	Short	2 - 4 (DN 50 - 100)	22
	Wrench	Venturi	6 - 8 (DN 150 - 250)	24
	Worm Gear	Venturi	6 - 12 (DN 150 - 300)	24
	Wrench	Regular	4 & 6 (DN 100 & 150)	26
	Worm Gear	Regular	6 - 12 (DN 150 - 300)	27
500 CWP (34.5 bar)	Wrench	Regular	½ - 4 (DN 15 - 100)	23
	Wrench	Venturi	6 & 8 (DN 150 & 200)	26
800 CWP (55.2 bar)	Wrench	Regular	¾ - 4 (DN 20 - 100)	30
<b>STEAM JACKETED VALVES</b>				
200 CWP (13.8 bar)	Wrench	—	1 - 4 (DN 25 - 100)	31
<b>SPECIAL ORDER VALVES</b>				
FM Valves	Wrench	Regular	½ - 4 (DN 15 - 100)	35

**WARNING: Numerous products described in this catalog and manufactured before January 1, 1986 were equipped with packings and/or gaskets that contained asbestos. When servicing, disassembling, or disposing of these products, avoid breathing the asbestos fibers or dust.**

## Nordstrom Iron Plug Valves

Over the past 70 years, an estimated 70,000,000 Nordstrom valves have been installed in just about every type of commercial service imaginable. Many of these valves — still in service today — are considerably older than the persons currently operating them.

This widespread acceptance and long-time usage is a tribute to the versatility, proven performance and rugged durability of the Nordstrom valve design. It also demonstrates the effectiveness of the many improvements that have resulted from Nordstrom's continuing advances in valve design, materials application engineering and production technology which have upgraded valve performance while maintaining competitive pricing. Obviously, a great many users agree that the Nordstrom iron plug valve is one of the best values on the market today!

### A Technology Leader

At Nordstrom, high technological effort has been — and continues to be — dedicated to providing one of the valve industry's most outstanding research, development and test capabilities, as well as advanced manufacturing systems.

Nordstrom's broadening investment in product research and development activities, computer aided design systems, experimental and qualification testing facilities, new production techniques and state-of-the-art equipment and plant facilities has resulted in greater efficiencies and cost savings in the design and production of Nordstrom plug valves.



These ongoing efforts have continued to keep Nordstrom at the forefront of plug valve technology, while assuring Nordstrom's leadership role in today's plug valve marketplace.


### Advance Manufacturing Systems

Nordstrom iron plug valves are manufactured at Sulphur Springs, Texas. Here, Nordstrom engineers, quality assurance inspectors and other valve production experts are involved in the manufacturing process from start to finish to assure high standards of excellence.

Nordstrom's manufacturing technology leadership is particularly evident where state-of-the-art production equipment and processes have been implemented in the production of smaller Nordstrom iron plug valves. This manufacturing capability is rivaled by few (if any) other valve manufacturers today.

Included is a completely automated robotic machining center, with the capability of producing completely finished-machined valve bodies at a rate of one every 30 seconds.



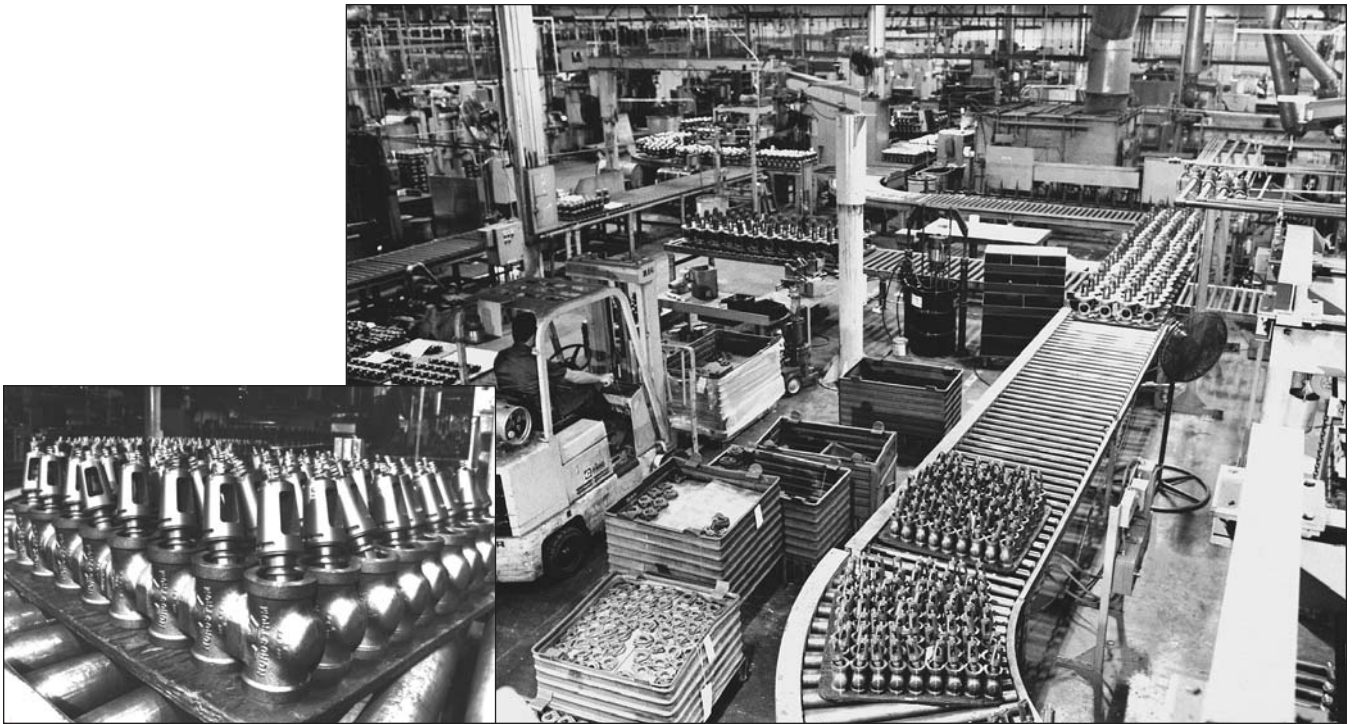

Once a valve body has been machined, a sophisticated conveyor system is utilized to transport the valve components through the remainder of the production process: to the machining area where the body is matched with its own individually-mated plug...through the process which applies a low-coefficient friction coating to every valve plug...to the final assembly area, where each valve cover bolt is individually hand-torqued to exacting torque specifications ...to the hydrostatic testing area, where each and every valve must undergo and pass this rigorous test procedure...and

through the final paint line where the valve receives its red coating — the color which has identified a genuine Nordstrom iron plug valve for decades.

### Customer Service





The Nordstrom plug valve customer sales and service organization, trained to assist with the valve specifications and applications, is one of the largest in the industry — and, we believe, the most experienced and technically qualified.

And they work with one of the valve industry's largest stocking distributor organizations — over 500 strategically — located branch stores throughout the United States alone!



Internationally, our own customer sales and service representatives are augmented by international sales agents who represent Nordstrom plug valve products in principal cities throughout the world.

In the development of advanced materials and processes...in the creation of soundly engineered and innovative designs...in rigorous proof of performance testing...in advanced, cost effective production facilities...in the breadth of proven product lines...in the scope of customer sales and service capabilities — these are the areas of performance that demonstrate the strengths and resources of Nordstrom Valves.

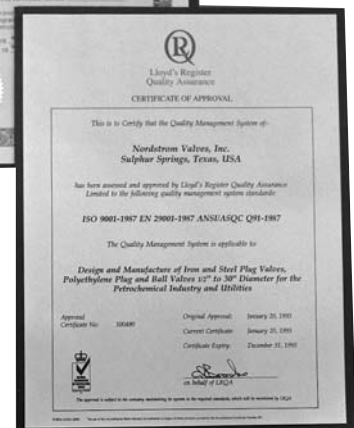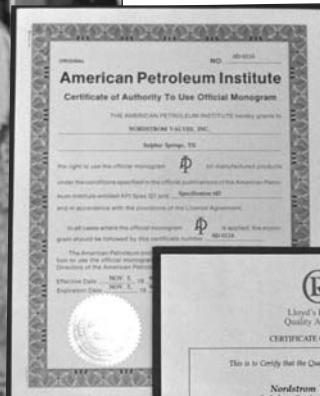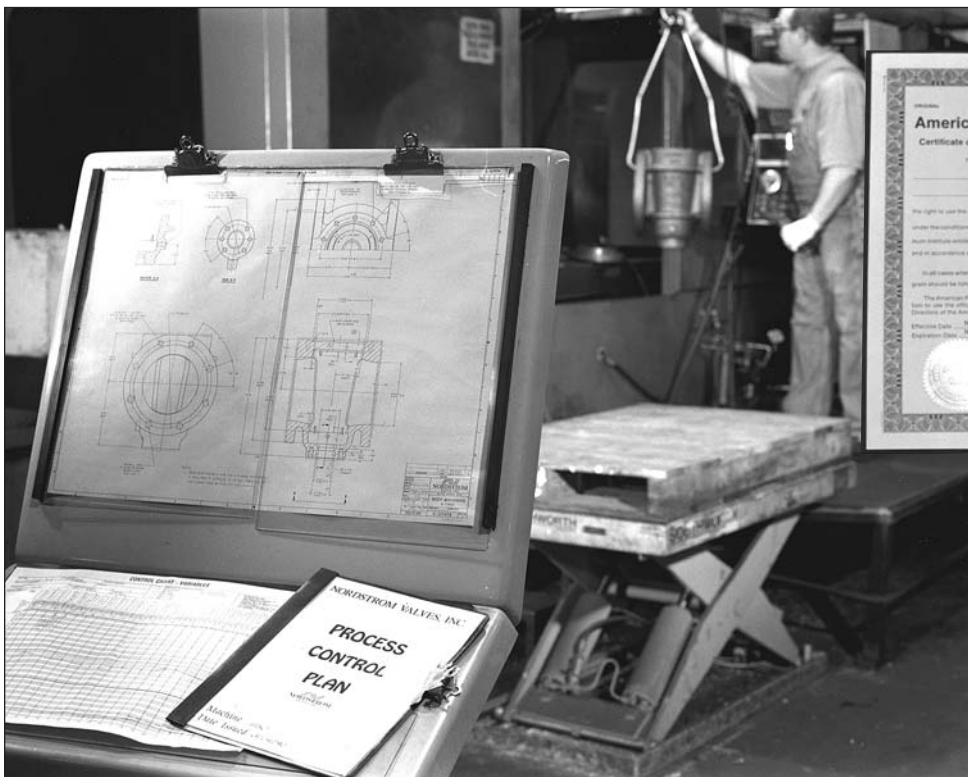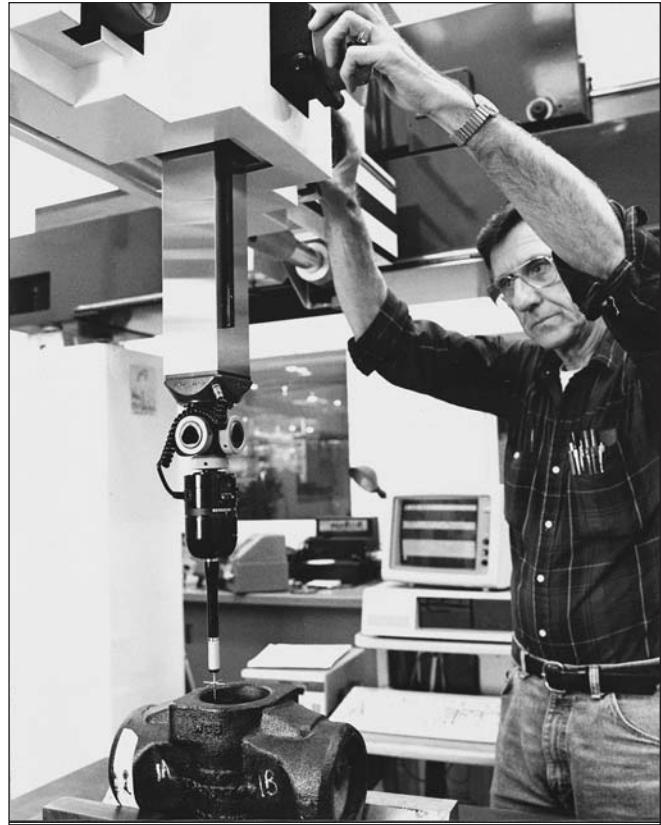

## Advantages of Nordstrom Iron Plug Valves

Nordstrom valves are made in a variety of patterns that assure maximum economy and efficiency for the full range of valve services. Gray Iron Nordstrom valves are suitable for air conditioning and heating services, oil and gas applications, water treatment installations — wherever there is a need for rugged, dependable quarter-turn plug valves!

Advantages of Nordstrom plug valves include:

- **Valve Seat Never Exposed**

The vital seating surfaces are self-protecting and self-cleaning. Any abrasive ingredient which may touch the plug in a closed position is wiped off when the plug turns back to the open position.

- **Positive Quarter-turn Operation**

Operating Nordstrom valves is sure, quick and easy. Positive quarter-turn rotary action opens and closes the valve. There are no enlarged pockets or recesses to collect sediment, scale deposits or other foreign matter that might interfere with valve action.

- **Drop-Tight Seating**

There's no equal to the Nordstrom valve's tight shut-off when used with a regular program of sealant replacement in critical services.

- **Push-Button Seat Replacement**

You can renew the seat in a Nordstrom valve in seconds — all from outside — by quick, inexpensive sealant injection (See the Nordstrom Sealant and Sealant Equipment catalog.)





- **No Part Vibration When Throttling**

Because of their positive seating principle and rotary action, Nordstrom valves are not affected by vibration of loose parts. Nordstrom plug valves have been used successfully for many years

in continuous throttling services to reduce pressures and control the rate of flow.

- **Most Compact Sizes**

Nordstrom valves have no projecting yokes or bonnets, no exposed threads to corrode, no underhanging body to waste vital space. This allows for the most efficient and economical design in the construction of manifolds, pumping stations, etc.

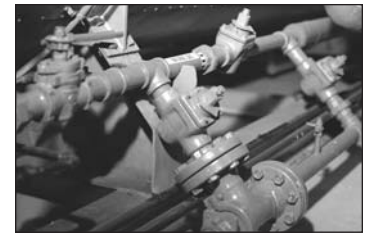

- **No Seat Leakage**

Proper performance of a tapered-plug valve requires correct plug adjustment. Every Nordstrom valve is factory-adjusted to specific settings — and assembly assures that this correct adjustment will be retained for drop-tight sealing.

- **Instant Seat Replacement**

The plug in a Nordstrom valve can momentarily be jacked from its seat by a few turns of the lubricant screw or by injection of sealant from a lubricant gun. This plug-jacking assures that even after long periods of disuse, the plug can be operated easily, and the valve will seal drop-tight.

### Gray Iron



The gray iron in Nordstrom valve castings is a high-tensile-strength flake-graphite cast iron produced in electric induction furnaces. Its composition and microstructure are closely controlled so that it consistently exhibits a tensile strength exceeding the minimum required for Class B (31,000 psi) of ASTM Specification A 126-Gray Iron Castings for Valves, Flanges and Pipe Fittings. Conformance to all other requirements of the specification is assured through established quality control procedures. Nordstrom high-strength Gray iron valves are of the "all-iron" type and contain no non-ferrous metals in their construction.

# Pascal's Law

## The Basic Principle of the Nordstrom Valve

**Pascal's Principle:** Nordstrom Valves make use of the scientific principle known as Pascal's Law. This law states that "a unit pressure applied to the fluid contained in a sealed vessel is transmitted uniformly to all areas of the confining surfaces of the fluid with undiminished force, thus multiplying the force many times, depending on the area of the interior of the vessel."

Sealant systems are incorporated in metal-seated plug valves as an integral part of the valve, and sealant is required to ensure proper valve performance.

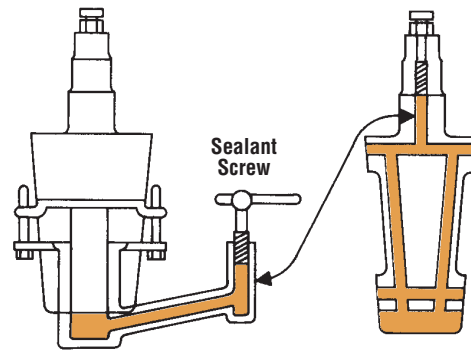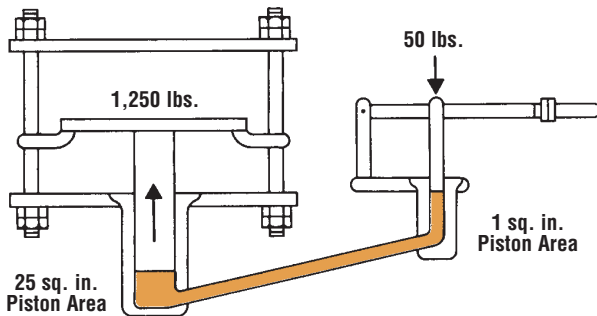

1. Shown is a demonstration of Pascal's Law. A given force of 50 lbs. lifts 1,250 lbs. over an enlarged area of 25 to 1 ratio.


2. This superimposed drawing of a Nordstrom plug valve shows application of Pascal's Law. The sealant screw, when turned, exerts powerful hydraulic force which will slightly raise the plug from its seat if necessary.

3. The sealant fitting or screw, inserted in top of the plug, performs the same operation, pressure being transmitted through the sealant grooves. The sealant grooves connect in the plug and body, forming a transmission line to the bottom chamber. The plug is always sealed against line pressure.


## Plug Valve Patterns

Nordstrom plug valves are available with threaded, flanged, compression and grooved ends to meet the needs of your piping systems. Valves are wrench- or gear-operated, as listed in the detailed specification pages.


Nordstrom valves come in a variety of engineered patterns to assure maximum efficiency and economy for the full range of valve services. These include:

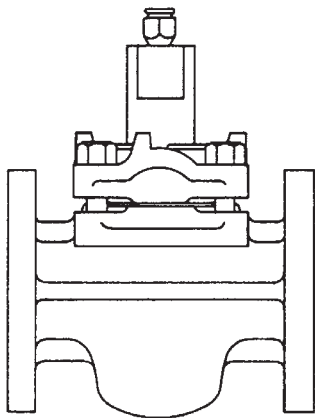

**Regular Pattern**, which provides the largest port opening in a trapezoidal configuration.

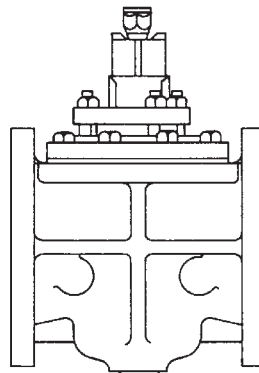

**Short Pattern**, which incorporates the largest practical port area consistent with matching gate valve face-to-face dimensions.

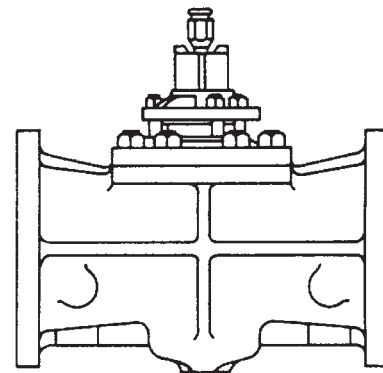

**Venturi Pattern**, which has a smaller port than either the regular or short patterns. The venturi pattern provides optimized approach and discharge angles, plus smooth flow contours to provide minimum pressure drop.



# Super Nordstrom Two-Bolt, Cover-Type Iron Valve

## A low cost... iron body plug valve with all the benefits of Nordstrom Valve designs


It's true! All of these time-proven quality features are available to the gas industry in the low-cost Super Nordstrom plug valve.

External leakage is eliminated through the proven Nordstrom designs without the use of costly accessories to protect exposed, threaded stems.

All valves may be operated by a standard two-inch square wrench with the use of an adapter that clearly indicates valve open and closed positions above ground.

These valves incorporate all of the well-known features of conventional Nordstrom valves including quarter-turn operation, a thermally bonded, low-friction plug coating for low operating torque, and sealant jacking to insure positive operation and drop-tight closure.

1. **Sealant Injection Fitting** – provides for simple, quick injection of sealant in Super Nordstrom valves for instant seat replacement. The fitting also serves as a compression screw when sealant is used in stick form; can be removed, with caution, under pressure.
2. **Weatherseal** – eliminates the trash pocket between the cover and stem to provide optimum environmental corrosion protection.
3. **Offset Cover** – is flush with body to eliminate potential leak paths; cover bolts are recessed to allow easy wrench operation. Cover and bolts provide greater resistance against external corrosion.
4. **Stem Seal** – limits plug lift and provides added protection against external leakage.
5. **Cover Seal Gasket** – is independent of plug positioning mechanism, and provides maximum protection against external leakage.
6. **Double Ball Checks** (not shown) – maintain sealant pressure in the enclosed grooving system in the plug and body and prevents back pressure on the sealant chamber.
7. **Sealdport™ Grooving System** – is carefully designed to give complete distribution of pressurized sealant to

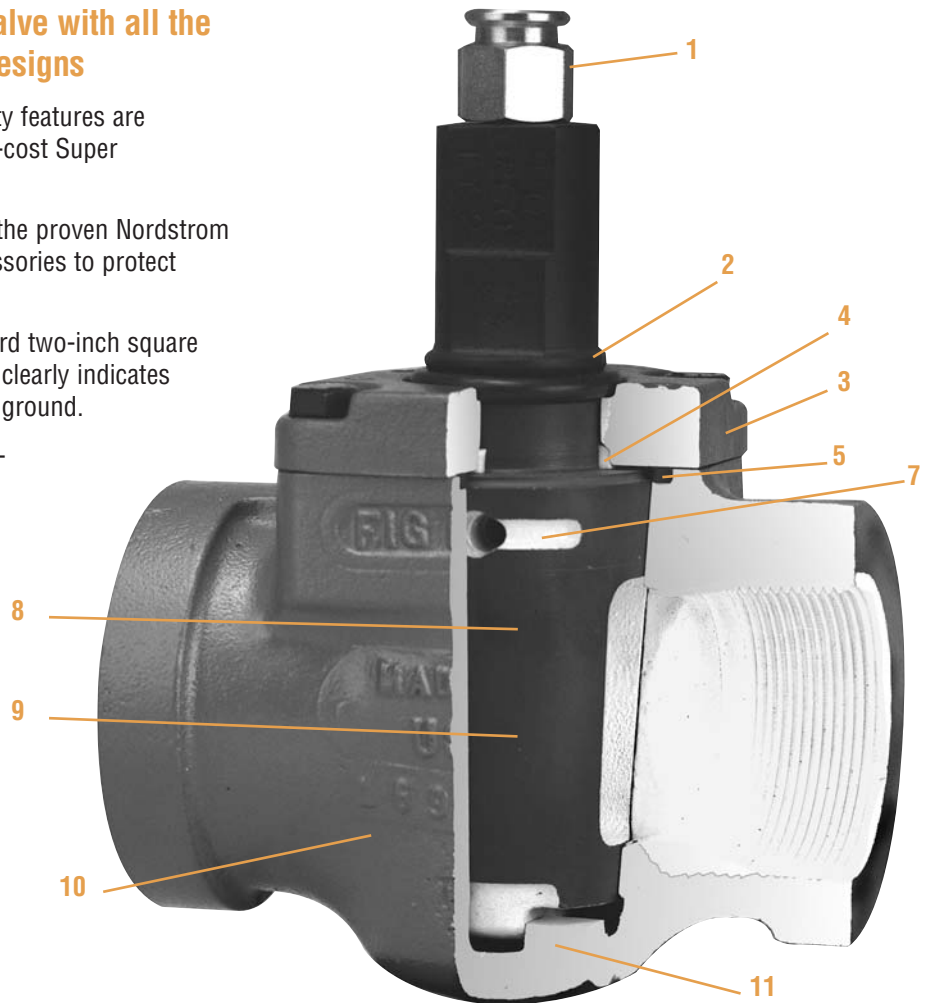

seating surfaces; surrounds the body port for complete sealing.

8. **Statically Balanced Plug** The spring (below plug) and loaded reinforced TFE washer (above plug) assure proper plug positioning, “always turn” capability and predictable torque.
9. **Tapered Iron Plug** – is coated with a material that has an exceptionally low friction coefficient, is permanently bonded to metal surface and provides permanent separation of metal plug and body. The coating is inert to most liquids and gases.
10. **Iron Body**
11. **Internal Stops** – eliminate trash pockets around the cover and stem to provide maximum environmental corrosion protection.


# Nordstrom Bolted Gland-Type Iron Plug Valves

In bolted gland-type valves, illustrated below, controlled plug motion is provided by flexing of the gland itself. The bolted-type gland valves can be adjusted, if needed, but normally require little attention for leak-free, easy-turning valve performance.

The tapered plug is lapped individually with its matching body, providing perfect seating contact. The sealant channels in the plug and body seats provide lubrication

which, together with the positive rotary action of the tapered-plug valve, protects the seating surfaces against corrosion, erosion, or accumulation of solid deposits. This valve is designed with a heavy-wall body which is constructed beyond its requirements as a pressure vessel for its maximum rated working pressure to withstand the higher-than-line sealant pressure and expected line stresses.

1. **Wrench Square**
2. **Fixed Adjustment Gland**
3. **O-rings**
4. **Flexible Metal Sealing Diaphragm and Gasket**
5. **Heavy-Wall Body**
6. **Plug**
7. **Sealant Fitting**  
(Combination Sealant Screw and Gun Fitting)
8. **Gland Cap Screw**
9. **Cover Cap Screw**
10. **Cover**
11. **Sealant Check Valve**  
(Double Ball-Check Prevents Escape of Sealant)
12. **Sealant Grooves**  
(Provides "Sealdport" Sealant System)
13. **Sealant Chamber**  
(Provides Plug "Jacking" Force)

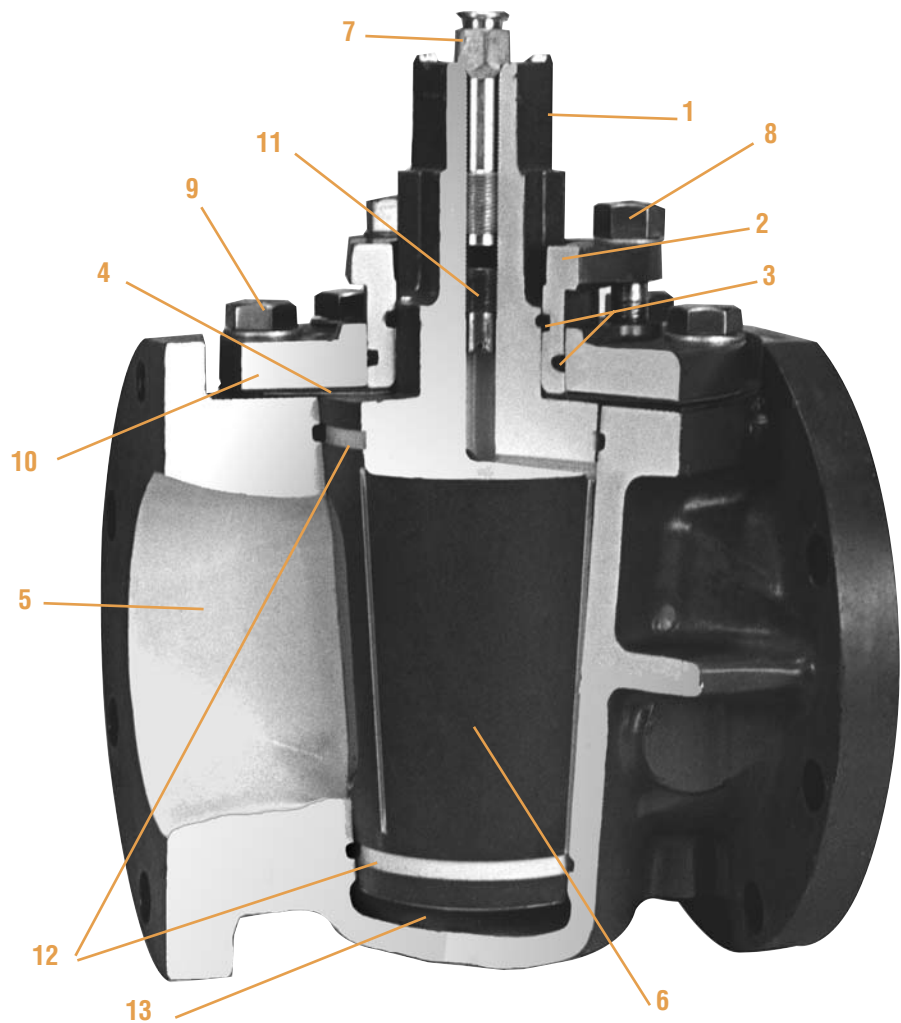

# Nordstrom Screwed Gland-Type Iron Plug Valves


In screwed gland-type valves, controlled plug motion is provided by flexing of spring washers. Once the plug has been carefully adjusted by Nordstrom personnel during valve assembly, no adjustments are needed in the field.

The tapered plug is lapped individually with its matching body, providing perfect seating contact. The sealant channels in the plug and body seats provide lubrication,

which, together with the positive rotary action of the tapered-plug valve, protects the seating surfaces against corrosion, erosion, or accumulation of solid deposits.

Nordstrom screwed gland-type valves also offer a thermally bonded, low-friction plug coating for low operating torque, and sealant jacking to insure positive operation and drop-tight closure.

1. Wrench Flats
2. Slotted Fixed Adjustment Gland
3. O-ring Holder with O-rings
4. Flexible Metal Sealing Diaphragm and Gasket
5. Spring Washers
6. Plug
7. Sealant Fitting  
(Combination Sealant Screw and Giant Buttonhead Fitting)
8. Cover Cap Screw
9. Cover
10. Sealant Check Valve (not shown)  
(Double Ball-Check Prevents Escape of Sealant)
11. Sealant Grooves  
(Provides "Sealdport" Sealant System)
12. Sealant Chamber  
(Provides Plug "Jacking" Force)

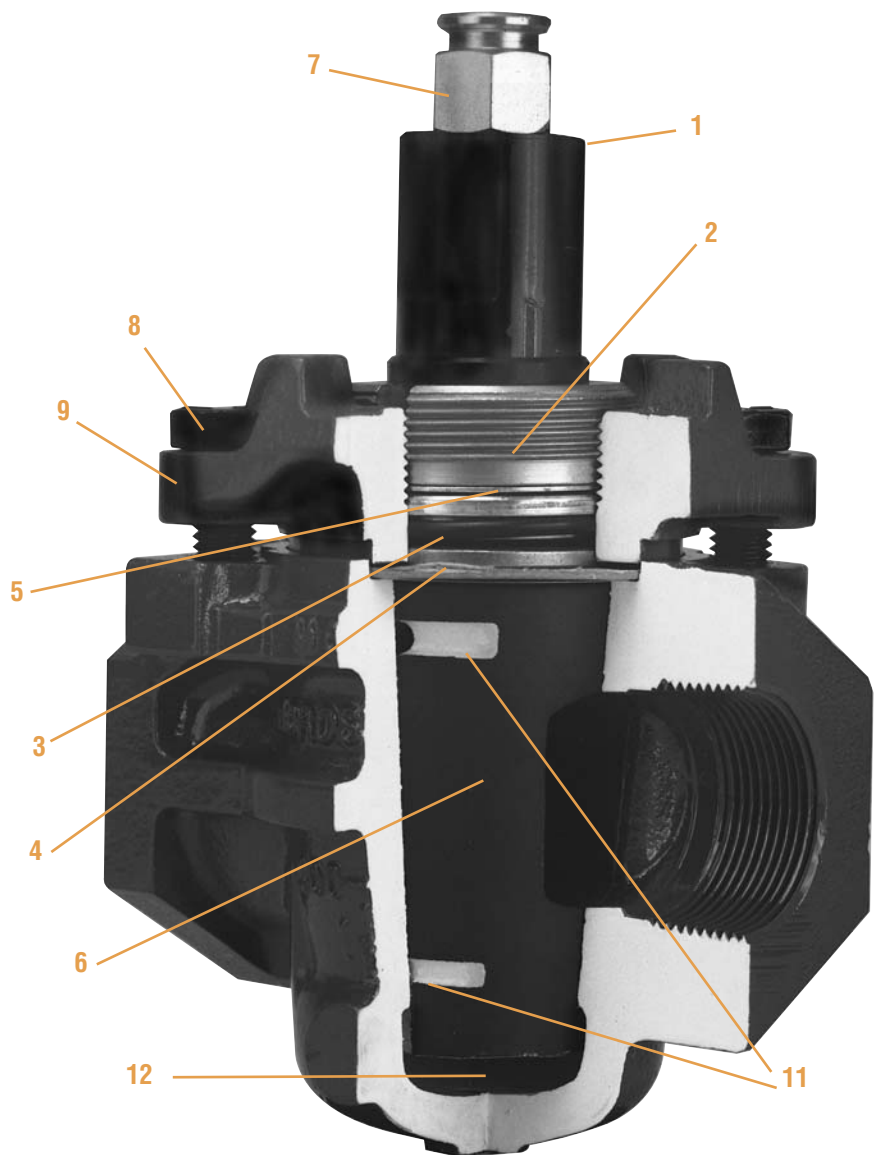

# Super Nordstrom Two-Bolt, Cover-Type Iron Plug Valves


## Short Pattern (Gate Length)

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

Figure 142 – Threaded, Wrench-Operated, Sizes 1/2 to 4

Figure 143 – Flanged, Wrench-Operated, Sizes 1 to 5

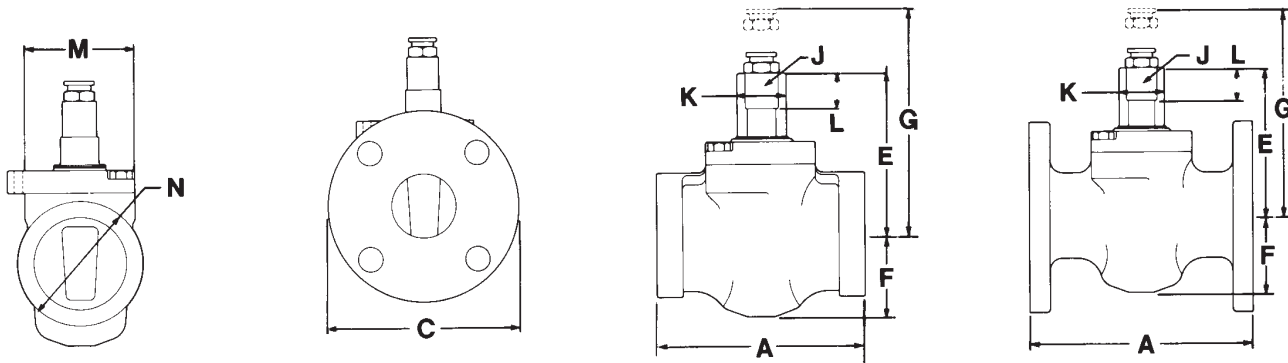

Size	NPS DN	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50	2 1/2 65	3 80	4 100	5 125
End-to-end, threaded, Figure 142	A	4.50 114	4.50 114	4.50 114	5.00 127	5.00 127	5.88 149	7.00 178	7.62 194	9.00 229	
End-to-end, flanged, Figure 143	B			5.50 140	6.50 165	6.50 165	7.00 178	7.50 191	8.00 203	9.00 229	10.00 254
Diameter of flange	C			4.3 109	4.6 117	5.0 127	6.0 152	7.0 178	7.5 191	9.0 229	10.0 254
Center to top of stem	E	3.8 97	3.8 97	3.8 97	4.1 104	4.1 104	4.7 119	4.7 119	5.6 142	6.3 160	6.3 160
Center to bottom of body	F	1.9 48	1.9 48	1.9 48	2.1 53	2.1 53	2.4 61	2.4 61	3.4 86	4.0 102	4.0 102
Clearance required to remove sealant fitting	G	5.5 140	5.5 140	5.5 140	5.8 147	5.8 147	6.4 163	6.4 163	7.2 183	8.0 203	8.0 203
Width of stem flats	J	.81 21	.81 21	.81 21	1.00 25	1.00 25	1.00 25	1.00 25	1.25 32	1.25 32	1.25 32
Diameter of stem	K	1.06 27	1.06 27	1.06 27	1.38 35	1.38 35	1.38 35	1.38 35	1.75 44	1.75 44	1.75 44
Height of stem flats	L	.9 23	.9 23	.9 23	1.0 25	1.0 25	1.0 25	1.0 25	1.3 33	1.3 33	1.3 33
Extreme width of body, Figure 142	M	2.6 66	2.6 66	2.6 66	3.2 81	3.2 81	3.2 81	3.2 81	4.0 102	4.8 122	
Diameter of hub, Figure 142	N	2.3 58	2.3 58	2.3 58	2.9 74	2.9 74	3.6 91	4.3 109	5.2 132	6.4 163	
Size of Sealant Stick	—	B	B	B	B	B	B	B	B	B	B
Size of wrench	—	SN-1	SN-1	SN-1	SN-2	SN-2	SN-2	SN-2	SN-4*	SN-4*	SN-4*
Length of wrench	—	7.0 178	7.0 178	7.0 178	10.5 267	10.5 267	10.5 267	10.5 267	17.5 445	15.0 381	15.0 381
Weight (approx.) Figure 142	—	6 3	6 3	6 3	9 4	9 4	13 6	17 8	29 13	48 22	
Weight (approx.) Figure 143	—			9 4	14 6	14 6	20 9	25 11	38 17	65 29	80 36

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 142 and 143 valves conform to the following standards where applicable: ANSI B1.20.1; ANSI B16.1; ANSI B16.10; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

Figure 143 face-to-face lengths are interchangeable with ANSI Class 125 and API 175 CWP Cast Iron Gate Valves.

Figure 142 and 143 valves size 5 (125 mm) and smaller are not recommended for temperatures above +200°F (+93°C).


\* Use the longer SN-3 wrench for valves used in cold climates such as Canada.

# Nordstrom Bolted Gland-Type Iron Plug Valves

## Short Pattern (Gate Length)

200 CWP (13.8 bar)  
400 psig (27.6 bar) Test

Figure 143 – Flanged, Wrench-Operated, Sizes 6, 8 and 10

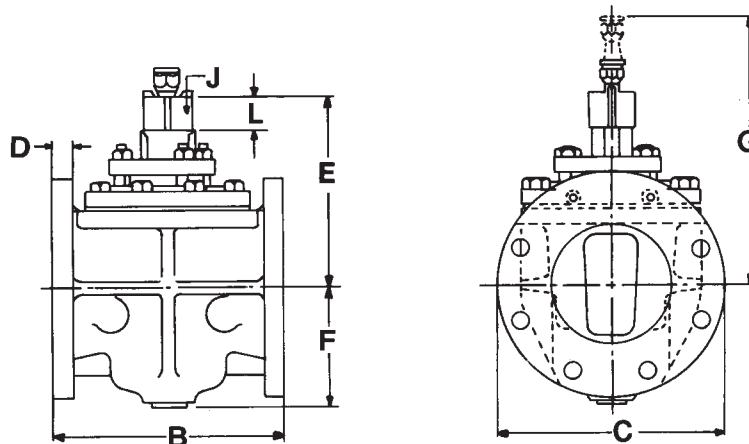

Size	NPS DN	6 150	8 200	10 250
Face-to-face, flanged, Figure 143	B	10.50 267	11.50 292	13.00 330
Diameter of flange	C	11.0 279	13.5 343	16.0 406
Thickness of flange	D	1.06 27	1.19 30	1.25 32
*No. and size of tapped holes in each flange	—	two 3/4"	two 3/4"	two 7/8"
Center to top of stem	E	9.6 244	11.9 302	14.2 361
Center to bottom of body	F	5.4 137	7.1 180	9.2 234
Clearance required to remove sealant fitting	G	13.6 345	16.9 429	19.2 488
Width of stem square	J	1.75 44	2.00 51	2.00 51
Height of stem square	L	1.8 46	2.0 51	2.1 53
Size of wrench	—	P-2	T-2	T-2
Length of wrench	—	27.0 686	36.0 914	36.0 914
Size of Sealant Stick	—	D	G	G
Weight (approx.) Figure 143	—	137 62	230 104	356 161

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 143 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.


Figure 143 face-to-face lengths are interchangeable with ANSI Class 125 and API 175 CWP Cast Iron Gate Valves.

\*Note: Studs or capscrews required. For sizes and lengths, see page 41.

### Short Pattern (Gate Length)

200 CWP (13.8 bar)  
400 psig (27.6 bar) Test

Figure 149 – Flanged, Worm-Gear-Operated,  
Sizes 6 through 12

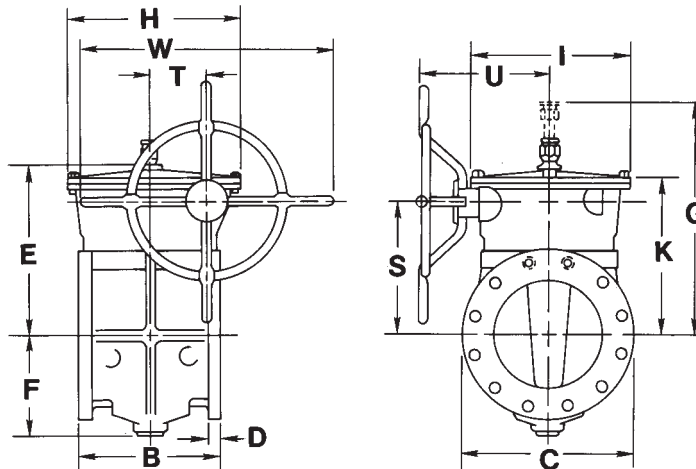

Size	NPS DN	6 150	8 200	10 250	12 300
Face-to-face, flanged, Figure 149	B	10.50 267	11.50 292	13.00 330	14.00 356
Diameter of flange	C	11.0 279	13.5 343	16.0 406	19.0 483
Thickness of flange	D	1.06 27	1.19 30	1.25 32	1.31 33
*No. and size of tapped holes in each flange	—	two 3/4"	two 3/4"	two 7/8"	two 7/8"
Center to top of stem	E	11.4 289	13.4 340	15.7 399	18.7 475
Center to bottom of body	F	5.4 137	7.1 180	9.2 234	10.6 269
Clearance required to remove sealant fitting	G	15.4 391	18.4 467	20.7 526	23.7 602
Length of gear housing	H	15.5 394	15.5 394	15.9 404	19.5 495
Width of gear housing	I	13.8 351	13.8 351	14.8 376	17.8 452
Center to top of housing	K	10.6 269	12.6 320	15.1 384	18.1 460
Center of port to center of handwheel	S	8.8 224	10.7 272	12.8 325	15.9 404
Transverse centerline to center of worm shaft	T	5.3 135	5.3 135	5.3 135	7.5 191
Longitudinal centerline to face of handwheel	U	12.6 320	12.6 320	13.3 338	14.5 368
Overall diameter of handwheel	W	20.0 508	20.0 508	23.0 584	26.0 660
Turns of handwheel to open valve	—	12½	12½	12½	19½
Size of Sealant Stick	—	D	G	G	G
Weight (approx.) Figure 149	—	228 103	321 146	458 208	760 345

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 149 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.

\*Note: Studs or capscrews required. For sizes and lengths, see page 41.

# Nordstrom Screwed Gland-Type Iron Plug Valves


## Regular Pattern

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

Figure 114 – Threaded, Wrench-Operated, Sizes ½ to 3

Figure 115 – Flanged, Wrench-Operated, Sizes 1 to 4

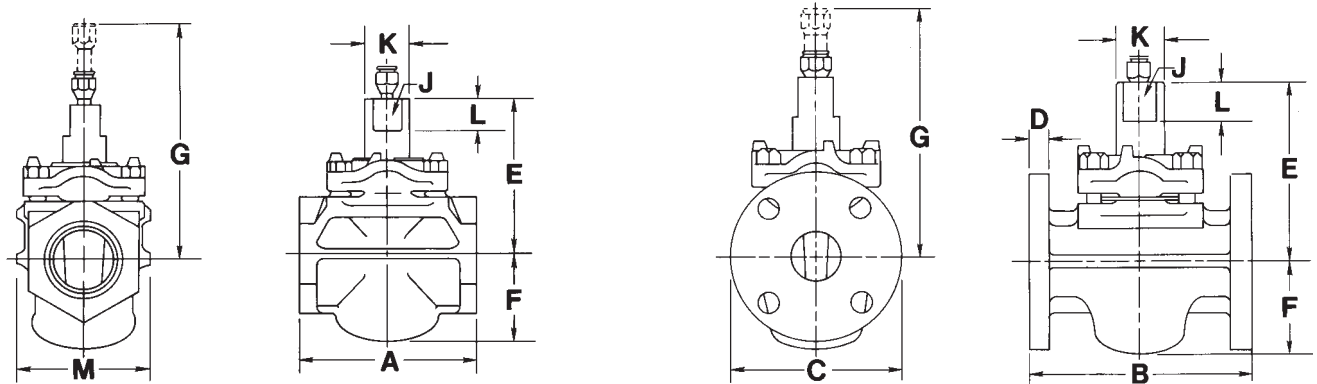

Size	NPS DN	½ 15	¾ 20	1 25	1½ 40	2 50	2½ 65	3 80	4 100
End-to-end, threaded, Figure 114	A	3.75 95	3.75 95	4.38 111	5.13 130	6.50 165		8.06 205	
End-to-end, flanged, Figure 115	B			5.50 140	6.50 165	7.50 191	8.25 210	9.00 229	9.00 229
Diameter of flange	C			4.3 108	5.0 127	6.0 152	7.0 178	7.5 191	9.0 229
Thickness of flange	D			.50 13	.63 16	.69 18	.75 19	.81 21	1.00 25
Center to top of stem	E	3.9 99	3.9 99	4.1 104	4.9 124	5.7 145	6.2 157	7.0 178	7.5 191
Center to bottom of body, Figure 114	F	2.0 51	2.0 51	2.2 56	2.8 71	3.2 81	3.6 91	4.2 107	4.6 117
Center to bottom of body, Figure 115	F			2.2 56	2.8 71	3.2 81		4.2 107	
Clearance required to remove sealant fitting	G	6.5 165	6.5 165	6.7 170	7.5 191	8.3 211	8.8 224	9.6 244	10.1 257
Width of stem flats	J	.81 21	.81 21	.88 22	1.00 25	1.13 29	1.25 32	1.38 35	1.38 35
Diameter of stem	K	1.09 28	1.09 28	1.22 31	1.41 36	1.59 40	1.78 45	1.97 50	1.97 50
Height of stem flats	L	.9 23	.9 23	1.0 25	1.2 30	1.4 36	1.5 38	1.8 46	1.8 46
Extreme width of body, Figure 114	M	3.2 81	3.2 81	3.4 86	4.1 104	4.8 122	5.3 135	6.0 152	
Size of Sealant Stick	—	B	B	B	B	B	B	B	B
Size of wrench	—	D-8	D-8	E-8	J-8	K-8	L-8	M-8	M-8
Length of wrench	—	5.5 140	5.5 140	7.0 178	10.5 267	14.0 356	17.5 445	21.0 533	21.0 533
Weight (approx.) Figure 114	—	6 3	6 3	8 4	14 6	22 10		47 21	
Weight (approx.) Figure 115	—			11 5	19 9	28 13	43 20	60 27	74 34

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.


Figures 114 and 115 valves conform to the following standards where applicable: ANSI B1.20.1; ANSI B16.1; ANSI B16.10; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

# Nordstrom Bolted Gland-Type Iron Plug Valves

## Venturi Pattern

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

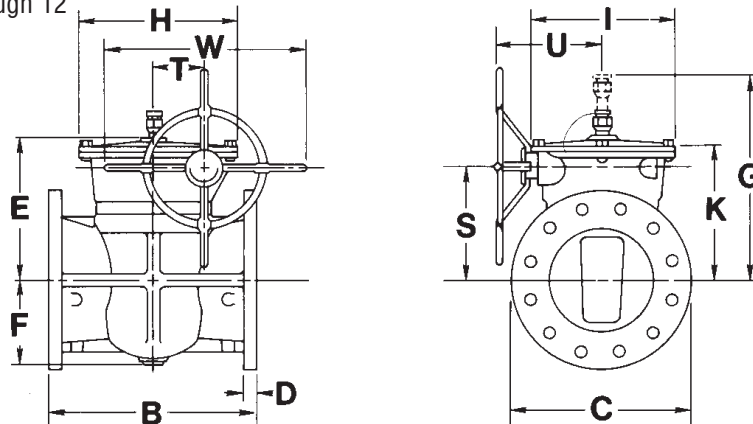 Figure 1169 – Flanged, Worm-Gear-Operated,  
 Sizes 6 through 12


Size	NPS DN	6 150	8 200	10 250	12 300
Face-to-face, flanged, Figure 1169	B	15.50 394	18.00 457	21.00 533	24.00 610
Diameter of flange	C	11.0 279	13.5 343	16.0 406	19.0 483
Thickness of flange	D	1.06 27	1.19 30	1.25 32	1.31 33
Center to top of stem	E	11.3 287	13.2 335	15.0 381	16.1 409
Center to bottom of body	F	5.4 137	6.8 173	8.9 226	10.0 254
Clearance required to remove sealant fitting	G	15.4 391	18.2 462	20.0 508	21.1 536
Length of gear housing	H	15.6 396	15.6 396	15.9 404	19.5 495
Width of gear housing	I	13.8 351	13.8 351	14.8 376	17.8 452
Center to top of housing	K	10.8 274	12.0 305	14.0 356	15.1 384
Center of port to center of handwheel	S	8.8 224	10.0 254	11.6 295	12.8 325
Transverse centerline to center of worm shaft	T	5.3 135	5.3 135	5.3 135	7.5 191
Longitudinal centerline to face of handwheel	U	12.6 320	12.6 320	13.3 338	14.5 368
Overall diameter of handwheel	W	20.0 508	20.0 508	23.0 584	26.0 660
Turns of handwheel to open valve	—	12½	12½	12½	19½
Size of Sealant Stick	—	D	G	G	G
Weight (approx.) Figure 1169	—	248 112	371 168	522 237	803 364

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 1169 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.



### Venturi Pattern

Sizes 14 - 24  
 150 CWP (10.3 bar)  
 300 psig (20.7 bar) Test

Sizes 30 and 36  
 120 CWP (8.3 bar)  
 240 psig (16.6 bar) Test

Figure 1169 – Flanged, Worm-Gear-Operated,  
 Sizes 14 through 36

Size	NPS DN	14 350	18 450	20 500	24 600	30 750	36* 900
Face-to-face, flanged, Figure 1169	B	27.00 686	34.00 864	36.00 914	42.00 1067	51.00 1295	63.00 1600
Diameter of flange	C	21.0 533	25.0 635	27.5 699	32.0 813	38.8 986	46.0 1168
Thickness of flange	D	1.50 38	1.63 41	1.75 44	2.00 51	2.25 57	2.50 64
Center to top of stem	E	19.9 505	21.8 554	23.5 597	25.4 645	28.7 729	33.0 838
Center to bottom of body	F	12.5 318	13.9 353	15.3 389	17.6 447	20.7 526	25.6 650
Clearance required to remove sealant fitting	G	24.9 632	26.8 681	28.5 724	30.4 772	33.7 856	38.0 965
Length of gear housing	H	27.3 693	27.3 693	27.3 693	37.4 950	37.4 950	
Width of gear housing	I	24.5 622	24.5 622	24.5 622	35.8 909	35.8 909	
Center to top of housing	K	19.6 498	20.4 518	22.1 561	24.4 620	26.9 683	
Center of port to center of handwheel	S	16.6 422	17.4 442	19.1 485	21.1 536	24.1 612	27.9 709
Transverse centerline to center of worm shaft	T	11.1 282	11.1 282	11.1 282	15.1 384	15.1 384	19.9 505
Longitudinal centerline to face of handwheel	U	17.9 455	19.7 500	19.7 500	26.1 663	26.1 663	29.0 737
Overall diameter of handwheel	W	26.0 660	29.0 737	29.0 737	32.0 813	32.0 813	43.0 1092
Turns of handwheel to open valve	—	22½	22½	22½	32	32	43¼
Size of Sealant Stick	—	G	G	G	G	G	G
Weight (approx.) Figure 1169	—	1465 665	1983 899	2163 981	4120 1869	6580 2985	10846 4920

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 1169 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.

\*Size 36 (DN 900) valve does not have enclosed worm gearing. Supplied with open-type gearing only.


### Short Pattern (Gate Length)

200 CWP (13.8 bar)  
400 psig (27.6 bar) Test

Sizes 30 and 36  
120 CWP (8.3 bar)  
240 psig (16.6 bar) Test

Figure 185 – Flanged, Wrench-Operated,  
Sizes 6, 8 and 10

Figure 189 – Flanged, Worm-Gear-  
Operated, Sizes 6, 8 and 10

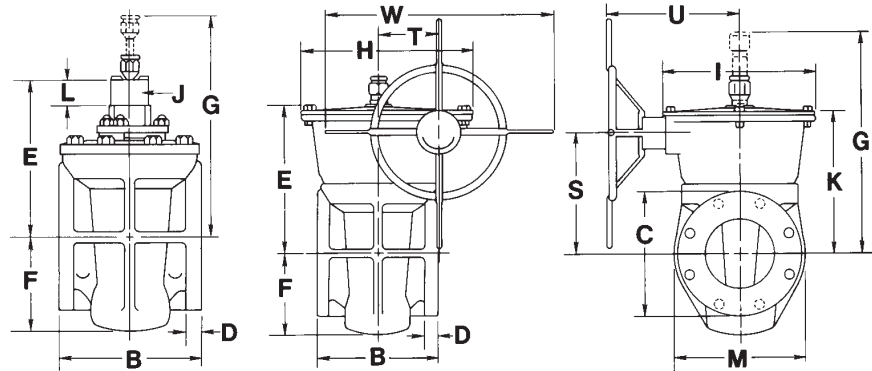

Size	NPS DN	6 150	8 200	10 250
Face-to-face, flanged, Figures 185 and 189	B	10.50 267	11.50 292	13.00 330
Diameter of flange	C	11.0 279	13.5 343	16.0 406
Thickness of flange	D	1.06 27	1.19 30	1.25 32
*No. and size of tapped holes in each flange	—	four ¼"	four ¼"	two ⅞"
Center to top of stem, Figures 185/189	E	11.9/13.4 302/340	13.4/15.3 340/389	15.3/17.1 389/434
Center to bottom of body	F	7.0 178	9.4 239	9.5 241
Clearance required to remove sealant fitting, Figures 185/189	G	16.9/18.4 429/467	18.4/20.3 467/516	20.3/22.1 516/561
Length of gear housing	H	15.5 394	15.9 404	15.9 404
Width of gear housing	I	13.8 351	14.8 376	14.8 376
Width of stem square, Figure 185	J	2.00 51	2.00 51	2.00 51
Center to top of housing	K	12.5 318	14.6 371	16.0 406
Height of stem square, Figure 185	L	2.0 51	2.0 51	2.1 53
Extreme width of body	M	11.5 292	13.5 343	16.0 406
Center of port to center of handwheel	S	10.6 269	12.4 315	13.8 351
Transverse centerline to center of worm shaft	T	5.3 135	5.3 135	5.3 135
Longitudinal centerline to face of handwheel	U	12.6 320	12.6 320	13.3 338
Overall diameter of handwheel	W	20.0 508	20.0 508	23.0 584
Turns of handwheel to open valve	—	12½	12½	12½
Size of Sealant Stick	—	G	G	G
Size of wrench	—	T-2	T-2	T-2
Length of wrench	—	36.0 914	36.0 914	36.0 914
Weight (approx.) Figure 185	—	208 94	292 132	368 167
Weight (approx.) Figure 189	—	256 116	347 157	484 220

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 185 and 189 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.

Figures 185 and 189 Face-to-face lengths are interchangeable with ANSI Class 125 and API 175 CWP Cast Iron Gate Valves.

\*Note: Studs or capscrews required. For sizes and lengths, see page 41.


# Nordstrom Screwed Gland-Type Iron Plug Valves

## Short Pattern

400 CWP (27.6 bar)

800 psig (55.2 bar) Test

Figure 214 – Threaded, Wrench-Operated, Sizes 1 and 2

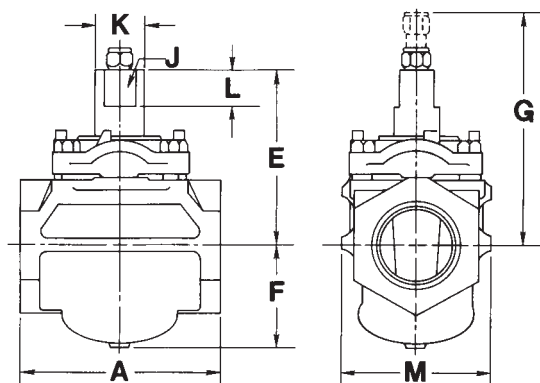

Size	NPS DN	1 25	2 50
End-to-end, threaded, Figure 214	A	4.38 111	6.50 165
Center to top of stem	E	4.1 104	5.7 145
Center to bottom of body	F	2.2 56	3.2 81
Clearance required to remove sealant fitting	G	6.7 170	8.3 211
Width of stem flats	J	.88 22	1.12 28
Diameter of stem	K	1.22 31	1.59 40
Height of stem flats	L	1.0 25	1.4 36
Extreme width of body	M	3.3 84	4.6 117
Size of Sealant Stick	—	B	B
Size of wrench	—	E-8	K-8
Length of wrench	—	7.0 178	14.0 356
Weight (approx.) Figure 214	—	8 4	24 11

Figure 214 valves conform to the following standards where applicable: ANSI B1.20.1; ANSI B16.1; ANSI B16.10; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

# Nordstrom Bolted Gland-Type Iron Plug Valves


## Regular Pattern

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

Figure 164 – Threaded, Wrench-Operated, Size 4

Figure 165 – Flanged, Wrench-Operated, Sizes 4, 6 and 8

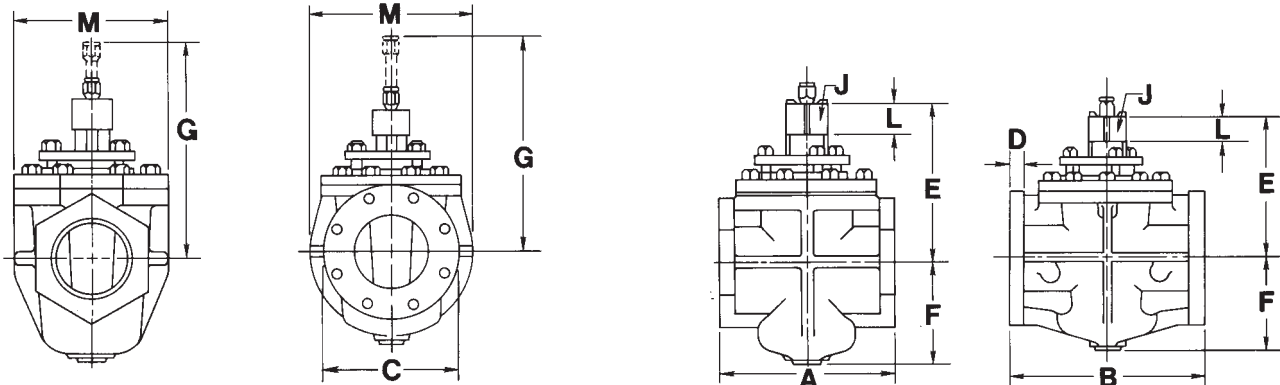

Size	NPS DN	4 100	6 150	8 200
End-to-end, threaded, Figure 164	A	10.00 254		
Face-to-face, flanged, Figure 165	B	12.00 305	15.50 394	18.00 457
Diameter of flange	C	9.0 229	11.0 279	13.5 343
Thickness of flange	D	1.00 25	1.06 27	1.19 30
Center to top of stem	E	9.6 244	12.1 307	14.7 373
Center to bottom of body, Figure 164	F	5.4 137		
Center to bottom of body, Figure 165	F	5.5 140	7.5 191	9.4 239
Clearance required to remove sealant fitting	G	13.4 340	17.1 434	19.7 500
Width of stem square	J	1.75 44	2.00 51	2.44 62
Height of stem square	L	1.8 46	2.1 53	2.4 61
Extreme width of body, Figure 164	M	8.9 226		
Extreme width of body, Figure 165	M	8.9 226	13.5 343	17.0 432
Size of wrench	—	P-2	T-2	V-2
Length of wrench	—	27.0 686	36.0 914	48.0 1219
Size of Sealant Stick	—	D	G	G
Weight (approx.) Figure 164	—	107 49		
Weight (approx.) Figure 165	—	129 59	277 126	500 227


Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 164 and 165 valves conform to the following standards where applicable: ANSI B1.20.1; ANSI B16.1; ANSI B16.10; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

### Regular Pattern

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

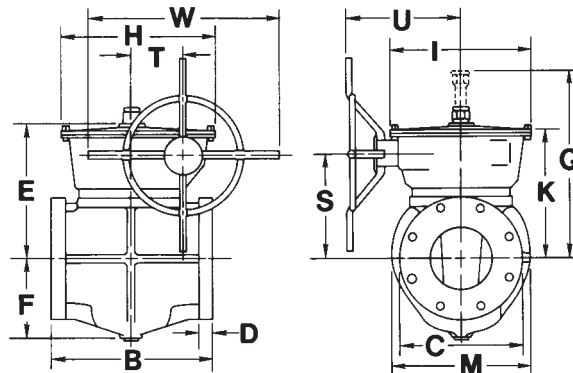 Figures 169 – Flanged, Worm-Gear-Operated,  
 Sizes 4 through 12


Size	NPS DN	4 100	6 150	8 200	10 250	12 300
Face-to-face, flanged, Figures 169	B	12.00 305	15.50 394	18.00 457	21.00 533	24.00 610
Diameter of flange	C	9.0 229	11.0 279	13.5 343	16.0 406	19.0 483
Thickness of flange	D	1.00 25	1.06 27	1.19 30	1.25 32	1.31 33
Center to top of stem	E	11.3 287	13.6 345	16.1 409	19.1 485	21.8 554
Center to bottom of body	F	5.5 140	7.5 191	9.4 239	11.6 295	13.7 348
Clearance required to remove sealant fitting	G	15.4 391	18.6 472	21.1 536	24.1 612	26.8 681
Length of gear housing	H	15.5 394	15.9 404	19.5 495	27.3 693	27.3 693
Width of gear housing	I	13.8 351	14.8 376	17.8 452	24.5 622	24.5 622
Center to top of housing	K	10.6 269	13.0 330	15.0 381	18.6 472	20.3 516
Extreme width of body	M	8.9 226	13.5 343	17.0 432	19.8 503	22.3 566
Center of port to center of handwheel	S	8.8 224	10.7 272	12.8 325	15.7 399	17.4 442
Transverse centerline to center of worm shaft	T	5.3 135	5.3 135	7.5 191	11.1 282	11.1 282
Longitudinal centerline to face of handwheel	U	12.6 320	13.3 338	14.5 368	17.9 455	19.7 500
Overall diameter of handwheel	W	20.0 508	23.0 584	26.0 660	26.0 660	29.0 737
Turns of handwheel to open valve	—	12½	12½	19½	22½	22½
Size of Sealant Stick	—	D	G	G	G	G
Weight (approx.) Figures 169	—	233 106	381 173	632 287	1120 508	1540 699

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 169 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.


# Nordstrom Screwed Gland-Type Iron Plug Valves

## Short Pattern

400 CWP (27.6 bar)

800 psig (55.2 bar) Test

Figure 305 – Flanged, Wrench-Operated, Sizes 2, 3 and 4

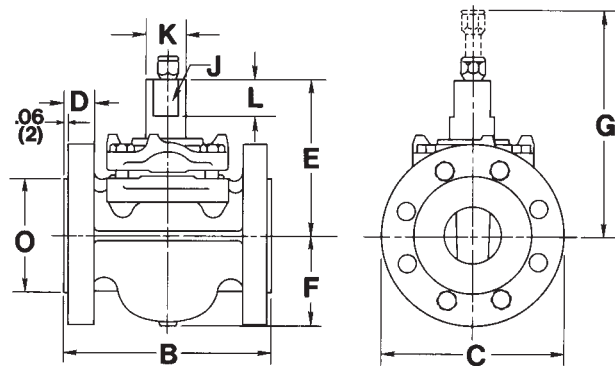

Size	NPS DN	2 50	3 80	4 100
Face-to-face, flanged (include 1/16" raised face), Figure 305	B	7.25 184	9.25 235	10.50 267
Diameter of flange	C	6.5 165	8.3 211	10.0 254
Thickness of flange (include 1/16" raised face)	D	1.06 27	1.19 30	1.50 38
*No. and size of tapped holes in each flange	—	four 5/8"	two 3/4"	
Center to top of stem	E	5.7 145	7.0 178	7.5 191
Center to bottom of body	F	3.3 84	4.3 109	4.8 122
Clearance required to remove sealant fitting	G	8.3 211	9.6 244	10.1 257
Width of stem flats	J	1.12 28	1.38 35	1.38 35
Diameter of stem	K	1.59 40	1.97 50	1.97 50
Height of stem flats	L	1.4 36	1.8 46	1.8 46
Diameter of 1/16" raised face	O	4.1 104	5.6 142	6.9 175
Size of wrench	—	K-8	M-8	M-8
Length of wrench	—	14.0 356	21.0 533	21.0 533
Size of Sealant Stick	—	B	B	B
Weight (approx.) Figure 305	—	37 17	75 34	105 48

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 305 valves conform to the following standards where applicable: ANSI B16.10; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

\*Studs or capscrews required. For sizes and lengths, see page 41.


### Regular Pattern

500 CWP (34.5 bar)

1000 psig (69.0 bar) Test

Figure 524 – Threaded, Wrench-Operated, Sizes ½ through 4

Figure 525 – Flanged, Wrench-Operated, Sizes 1 through 4

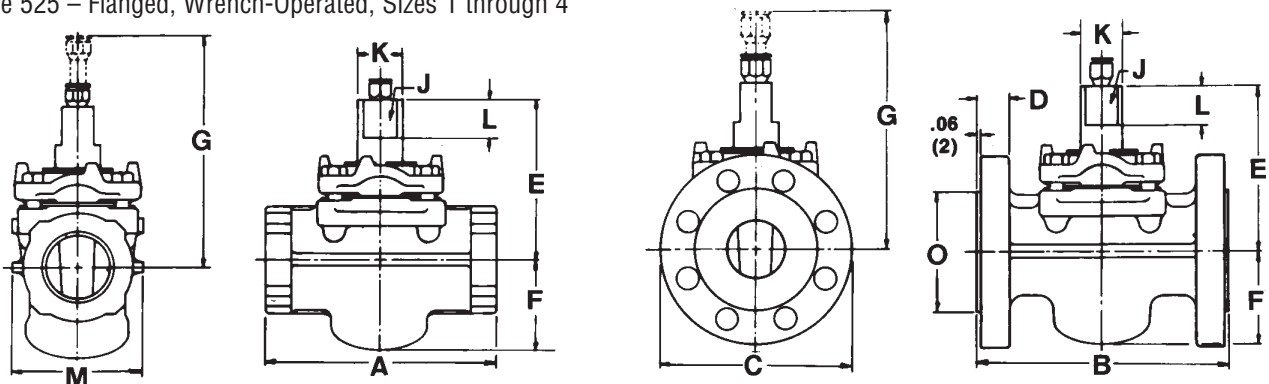

Size	NPS DN	½ 15	¾ 20	1 25	1¼ 32	1½ 40	2 50	2½ 65	3 80	4 100
End-to-end, threaded, Figure 524	A	3.75 95	3.75 95	4.88 124	5.38 137	6.75 171	8.00 203	9.50 241	9.38 238	10.50 267
Face-to-face, flanged (include ¼" raised face), Figure 525	B			6.25 159		7.50 191	8.50 216	9.50 241	11.13 282	12.00 305
Diameter of flange	C			4.9 124		6.1 155	6.5 165	7.5 191	8.3 211	10.0 254
Thickness of flange (include ¼" raised face)	D			.75 19		.94 24	1.06 27	1.19 30	1.31 33	1.50 38
Center to top of stem	E	3.9 99	3.9 99	4.1 104	4.6 117	4.9 124	5.7 145	6.2 157	7.0 178	7.5 191
Center to bottom of body	F	2.0 51	2.0 51	2.2 56	2.5 64	2.8 71	3.2 81	3.7 94	4.3 109	4.7 119
Clearance required to remove sealant fitting	G	6.5 165	6.5 165	6.7 170	7.2 183	7.5 191	8.3 211	8.8 224	9.6 244	10.1 257
Width of stem flats	J	.81 21	.81 21	.88 22	.94 24	1.00 25	1.13 29	1.25 32	1.38 35	1.38 35
Diameter of stem	K	1.09 28	1.09 28	1.22 31	1.31 33	1.41 36	1.59 40	1.78 45	1.97 50	1.97 50
Height of stem flats	L	.9 23	.9 23	1.0 25	1.1 28	1.2 30	1.4 36	1.5 38	1.8 46	1.8 46
Extreme width of body, Figure 524	M	3.1 79	3.1 79	3.3 84	3.6 91	3.9 99	4.6 117	5.4 137	6.0 152	6.8 173
Diameter of ¼" raised face	O			2.6 66		3.5 89	4.1 104	4.9 124	5.6 142	6.9 175
Size of wrench	—	D-8	D-8	E-8	H-8	J-8	K-8	L-8	M-8	M-8
Length of wrench	—	5.5 140	5.5 140	7.0 178	9.0 229	10.5 267	14.0 356	17.5 445	21.0 533	21.0 533
Size of Sealant Stick	—	B	B	B	B	B	B	B	B	B
Weight (approx.) Figure 524	—	6 3	6 3	9 4	13 6	18 8	27 12	43 20	58 26	80 36
Weight (approx.) Figure 525	—			14 6		28 13	38 17	56 25	81 37	110 50

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 524 and 525 valves conform to the following standards where applicable: ANSI B1.20.1; ANSI B16.1; ANSI B16.10; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

Figure 525 Face-to-face lengths are interchangeable with ANSI Class 250 and API 500 CWP Cast Iron Gate Valves.

# Nordstrom Bolted Gland-Type Iron Plug Valves

## Venturi Pattern

400 CWP (27.6 bar)

800 psig (55.2 bar) Test

Figure 1485 – Flanged, Wrench-Operated,  
Sizes 6 and 8

Figure 1489 – Flanged, Worm-Gear-Operated,  
Sizes 6 through 12

Size	NPS DN	6* 150	8 200	10 250	12 300
Face-to-face (include 1/16" raised face), flanged, Figures 1485 and 1489	B	13.00 330	14.25 362	16.75 425	17.50 445
Diameter of flange	C	12.5 318	15.0 381	17.5 445	20.5 521
Thickness of flange (include 1/16" raised face)	D	1.50 38	1.69 43	1.93 49	2.06 52
Center to top of stem, Figures 1485/1489	E	9.6/11.8 243/300	11.8/13.9 300/353	-/15.0 -/381	-/19.0 -/483
Center to bottom of body	F	5.6 142	6.9 175	8.9 226	10.9 277
Clearance required to remove sealant fitting, Figures 1485/1489	G	13.6/15.8 345/401	16.9/18.2 429/462	-/20.0 -/508	-/24.0 -/610
Length of gear housing	H		15.5 394	15.9 404	19.5 495
Width of gear housing	I		13.8 351	14.8 376	17.8 452
Width of stem square	J	1.75 44	2.00 51		
Center to top of housing	K		11.9 302	13.9 353	17.9 455
Height of stem square	L	1.8 46	2.0 51		
Diameter of 1/16" raised face	O	9.7 246	11.9 303	14.0 356	16.4 417
Center of port to center of handwheel	S	8.9 226	10.0 254	11.6 295	15.6 396
Transverse centerline to center of worm shaft	T		5.3 135	5.3 135	7.5 191
Longitudinal centerline to face of handwheel	U	9.8 249	12.6 320	13.3 338	14.5 368
Overall diameter of handwheel	W	20.0 508	20.0 508	23.0 584	26.0 660
Turns of handwheel to open valve	—	12½	12½	12½	19½
Size of Sealant Stick	—	D	G	G	G
Size of wrench	—	P-2	T-2		
Length of wrench	—	27.0 686	36.0 914		
Weight (approx.) Figure 1485	—	205 93	320 145		
Weight (approx.) Figure 1489	—	283 128	388 176		946 429

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 1485 and 1489 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.

\*Size 6 (DN 150) Fig. 1489 available with open gearing only.


Note: Studs or capscrews required. For sizes and lengths, see page 41.



## Venturi Pattern

300 CWP (20.7 bar)

600 psig (41.4 bar) Test

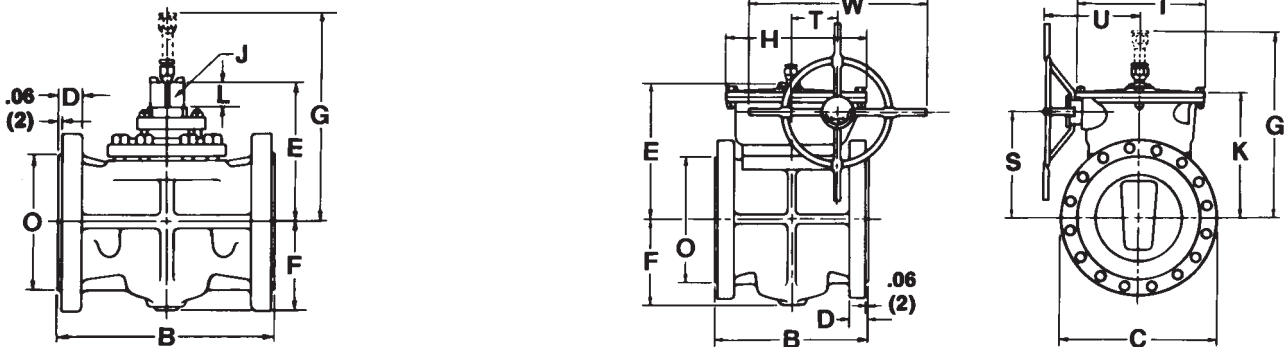 Figure 1489 – Flanged, Worm-Gear-Operated,  
 Sizes 16 through 24


Size	NPS DN	16 400	18 450	20 500	24 600
Face-to-face (include 1/16" raised face), flanged, Figure 1489	B	33.00 838	36.00 914	39.00 991	45.00 1143
Diameter of flange	C	25.5 648	28.0 711	30.5 775	36.0 914
Thickness of flange (include 1/16" raised face)	D	2.44 62	2.50 64	2.69 68	2.94 75
Center to top of stem	E	20.0 508	21.8 554	23.5 597	25.4 645
Center to bottom of body	F	13.0 330	14.5 368	15.9 404	17.9 455
Clearance required to remove sealant fitting	G	25.0 635	26.8 681	28.5 724	30.4 772
Length of gear housing	H	27.3 693	27.3 693	27.3 693	37.4 950
Width of gear housing	I	24.5 622	24.5 622	24.5 622	35.8 909
Center to top of housing	K	19.6 498	20.4 518	22.1 561	23.9 607
Diameter of 1/16" raised face	O	21.0 533	23.3 592	25.5 648	30.3 770
Center of port to center of handwheel	S	16.6 422	17.4 442	19.1 485	21.1 536
Transverse centerline to center of worm shaft	T	11.1 282	11.1 282	11.1 282	15.1 384
Longitudinal centerline to face of handwheel	U	17.9 455	19.7 500	19.7 500	26.1 663
Overall diameter of handwheel	W	26.0 660	29.0 737	29.0 737	32.0 813
Turns of handwheel to open valve	-	22½	22½	22½	32
Size of Sealant Stick	-	G	G	G	G
Weight (approx.) Figure 1489	-	1815 823	2515 1141	2975 1349	4220 1914

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 1489 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.


Note: Studs or capscrews required. For sizes and lengths, see page 41.

### Regular Pattern

400 CWP (27.6 bar)

800 psig (55.2 bar) Test

Figure 265 – Flanged, Wrench-Operated, Sizes 4 and 6

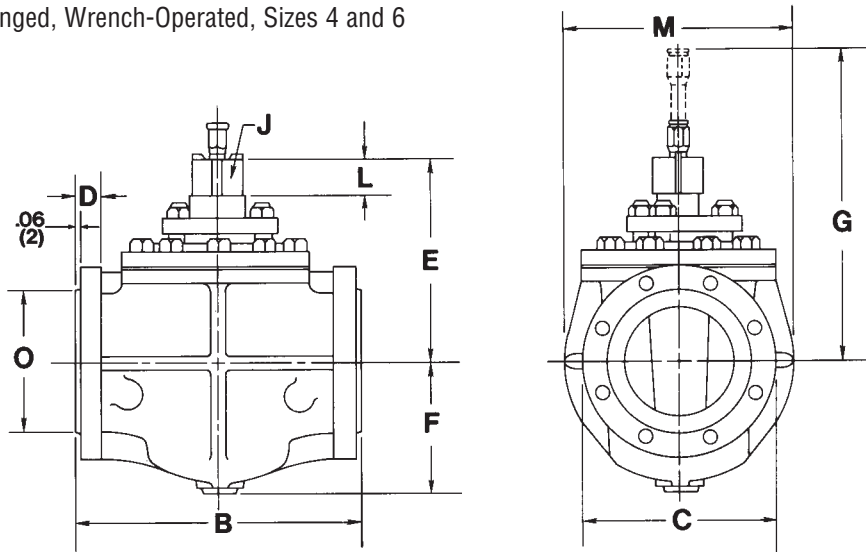

Size	NPS DN	4 100	6 150
Face-to-face, flanged, Figure 265	B	13.00 330	16.75 425
Diameter of flange	C	10.0 254	12.5 318
Thickness of flange	D	1.37 35	1.68 43
Center to top of stem	E	9.6 244	12.1 307
Center to bottom of body	F	5.7 145	7.8 198
Clearance required to remove sealant fitting	G	13.5 343	17.1 434
Width of stem square	J	1.75 44	2.00 51
Height of stem square	L	1.8 46	2.1 53
Extreme width of body	M	10.0 254	14.3 363
Diameter of 1/16" raised face	O	6.9 175	9.6 244
Size of wrench	—	P-2	T-2
Length of wrench	—	27.0 686	36.0 914
Size of Sealant Stick	—	D	G
Weight (approx.) Figure 265	—	184 83	385 175


Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 265 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10 (size 6 [DN 150] only); ASTM A126, Class B; and MSS SP-78. See page 34.

### Regular Pattern

400 CWP (27.6 bar)  
800 psig (55.2 bar) Test

Figure 269 – Flanged, Worm-Gear-Operated,  
Sizes 6 through 12

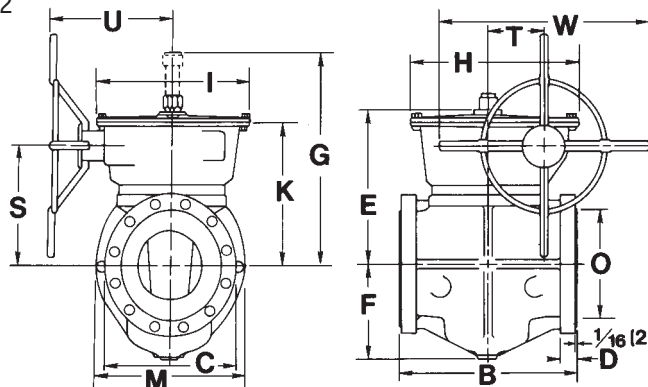

Size	NPS DN	6 150	8 200	10 250	12 300
Face-to-face (include 1/16" raised face), flanged, Figure 269	B	16.75 425	19.75 503	23.50 597	28.00 711
Diameter of flange	C	12.5 318	15.0 381	17.5 445	20.5 521
Thickness of flange (include 1/16" raised face)	D	1.68 43	1.94 49	1.94 49	2.06 52
Center to top of stem	E	14.1 358	16.1 409	19.1 485	21.8 554
Center to bottom of body	F	7.8 198	9.8 249	12.2 310	14.2 361
Clearance required to remove sealant fitting	G	19.1 485	21.1 536	24.1 612	26.8 681
Length of gear housing	H	15.9 404	19.5 495	27.3 693	27.3 693
Width of gear housing	I	14.8 376	17.8 452	24.5 622	24.5 622
Center to top of housing	K	12.9 328	14.9 378	18.6 472	20.3 516
Extreme width of body	M	14.3 363	17.8 452	21.5 546	23.8 605
Diameter of 1/16" raised face	O	9.6 244	11.9 302	14.0 356	16.4 417
Center of port to center of handwheel	S	10.7 272	12.8 325	15.7 399	17.4 442
Transverse centerline to center of worm shaft	T	5.3 135	7.5 191	11.1 282	11.1 282
Longitudinal centerline to face of handwheel	U	12.6 320	14.3 363	17.9 455	19.7 500
Overall diameter of handwheel	W	23.0 584	26.0 660	26.0 660	29.0 737
Turns of handwheel to open valve	—	12½	19½	22½	22½
Size of Sealant Stick	—	G	G	G	G
Weight (approx.) Figure 269	—	475 215	778 353	1120 508	1685 764

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 269 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.

## Venturi Pattern

500 CWP (34.5 bar)

1000 psig (69.0 bar) Test

Figure 1585 – Flanged, Wrench-Operated,  
Sizes 6 and 8

Figure 1589 – Flanged, Worm-Gear-Operated,  
Sizes 6 through 12

Size	NPS DN	6 150	8 200	10 250	12 300
Face-to-face (include 1/16" raised face), flanged, Figures 1585 and 1589	B	15.88 403	16.50 419	18.00 457	19.75 502
Diameter of flange	C	12.5 318	15.0 381	17.5 445	20.5 521
Thickness of flange (include 1/16" raised face)	D	1.69 43	1.94 49	2.19 56	2.31 59
*No. and size of tapped holes in each flange	—		two 7/8"	two 1"	two 1 1/8"
Center to top of stem, Figures 1585/1589	E	9.6/11.8 244/300	11.8/13.2 300/335	-/15.0 -/381	-/18.9 -/480
Center to bottom of body	F	5.7 145	7.0 178	9.0 229	11.1 282
Clearance required to remove sealant fitting, Figures 1585/1589	G	13.4/15.8 340/401	16.8/18.2 427/462	-/20.0 -/508	-/23.9 -/607
Length of gear housing	H	15.6 396	15.9 404	15.9 404	19.5 495
Width of gear housing	I	13.8 351	14.8 376	14.8 376	17.8 452
Width of stem square	J	1.75 44	2.00 51		
Center to top of housing	K	10.8 274	12.6 320	14.0 356	17.9 455
Height of stem square	L	1.8 46	2.0 51		
Diameter of 1/16" raised face	O	9.7 246	11.9 302	14.0 356	16.4 417
Center of port to center of handwheel	S	8.8 224	10.2 259	11.6 295	15.6 396
Transverse centerline to center of worm shaft	T	5.3 135	5.3 135	5.3 135	7.5 191
Longitudinal centerline to face of handwheel	U	12.6 320	12.6 320	13.3 338	14.5 368
Overall diameter of handwheel	W	20.0 508	20.0 508	23.0 584	26.0 660
Turns of handwheel to open valve	—	12 1/2	12 1/2	12 1/2	19 1/2
Size of Sealant Stick	—	D	G	G	G
Size of wrench	—	P-2	T-2		
Length of wrench	—	27.0 686	36.0 914		
Weight (approx.) Figures 1585/1589	—	241/320 109/145	368/450 167/204	-/628 -/285	-/1076 -/488

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 1585 and 1589 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.


Figure 1589 (size 6 [DN 150] through size 12 [DN 300]) Face-to-face lengths are interchangeable with ANSI Class 250 and API 500 CWP Cast Iron Gate Valves.

\*Note: Studs or capscrews required. For sizes and lengths, see page 41.

### Venturi Pattern

400 CWP (27.6 bar)

800 psig (55.2 bar) Test

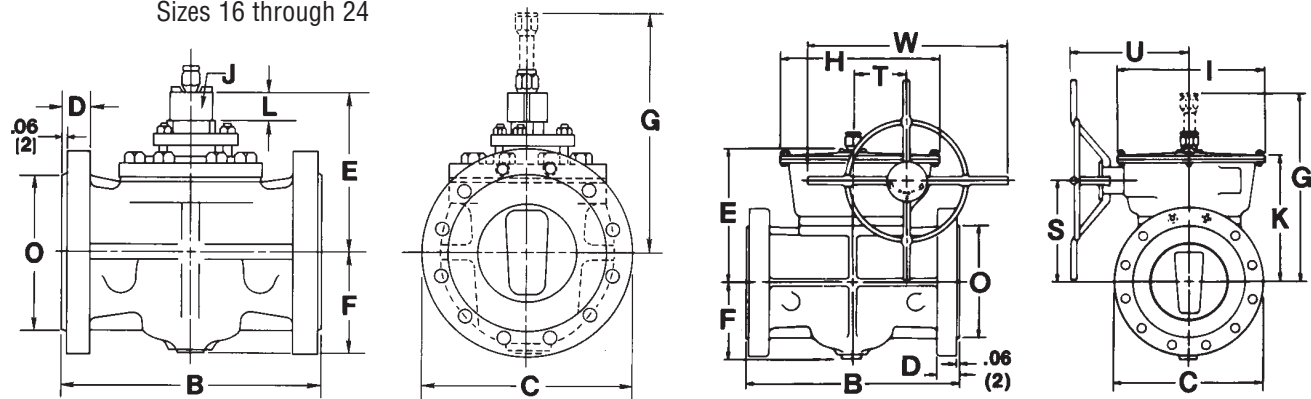 Figure 1589 – Flanged, Worm-Gear-Operated,  
 Sizes 16 through 24


Size	NPS DN	16 400	18 450	20 500	24 600
Face-to-face (include 1/16" raised face), flanged, Figure 1589	B	33.00 838	36.00 914	39.00 991	45.00 1143
Diameter of flange	C	25.5 648	28.0 711	30.5 775	36.0 914
*Thickness of flange (include 1/16" raised face)	D	2.69 68	2.75 70	3.00 76	3.31 84
Center to top of stem	E	19.9 505	21.8 554	23.5 597	25.4 645
Center to bottom of body	F	13.0 330	14.5 368	16.1 409	18.5 470
Clearance required to remove sealant fitting	G	25.0 635	26.8 681	28.5 724	30.4 772
Length of gear housing	H	27.3 693	27.3 693	27.3 693	37.4 950
Width of gear housing	I	24.5 622	24.5 622	24.5 622	35.8 909
Center to top of housing	K	19.6 498	20.4 518	22.1 561	24.4 620
Diameter of 1/16" raised face	O	21.0 533	23.3 592	25.5 648	30.3 770
Center of port to center of handwheel	S	16.6 422	17.4 442	19.1 485	21.1 536
Transverse centerline to center of worm shaft	T	11.1 282	11.1 282	11.1 282	15.1 384
Longitudinal centerline to face of handwheel	U	17.9 455	19.7 500	19.7 500	26.1 663
Overall diameter of handwheel	W	26.0 660	29.0 737	29.0 737	32.0 813
Turns of handwheel to open valve	-	22½	22½	22½	32
Size of Sealant Stick	-	G	G	G	G
Weight (approx.) Figure 1589	-	2080 943	2800 1270	3525 1599	5730 2599

Flanges are drilled to ANSI Class 250 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figure 1589 valves conform to the following standards where applicable: ANSI B16.1; ANSI B16.10; ASTM A126, Class B; and MSS SP-78. See page 34.

\*Size 16 (DN 400) to 24 (DN 600) Figure 1589 valves have flanges thicker than those specified for ANSI Class 250 and have correspondingly higher pressure ratings. They are intended for use between steel flanges ANSI B16.5 Class 300. Flange bolting and gaskets should conform to ANSI B16.5 Class 300.

# Nordstrom Screwed Gland-Type Iron Plug Valves


## Regular Pattern

800 CWP (55.2 bar)

1600 psig (110.3 bar) Test

Figure 824 – Threaded, Wrench-Operated, Sizes ¼ through 3

Figure 825 – Flanged, Wrench-Operated, Sizes 2 through 4

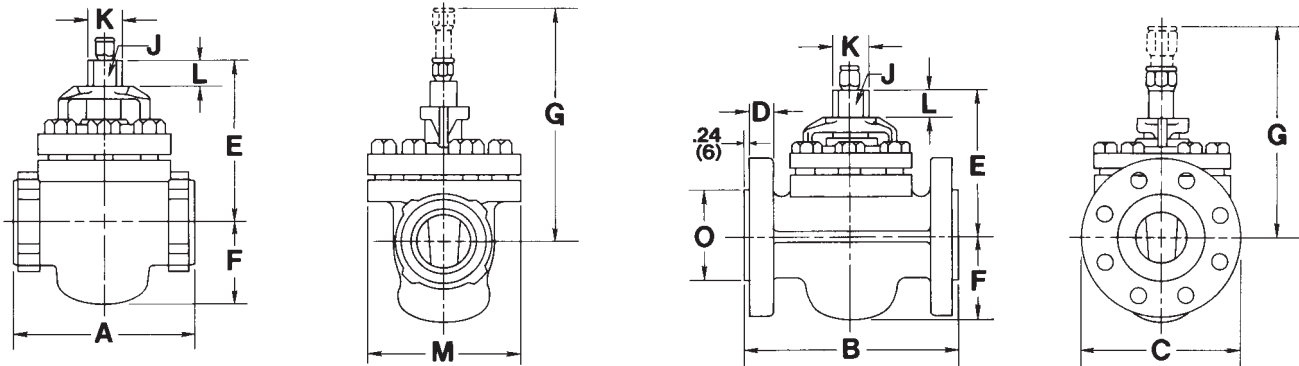

Size	NPS DN	¼ 20	1 25	2 50	3 80	4 100
End-to-end, threaded, Figure 824	A	3.75 95	4.88 124	8.13 206	10.00 254	
Face-to-face, flanged (include ¼" raised face), Figure 825	B			11.50 292	14.00 356	17.00 432
Diameter of flange	C			6.5 165	8.3 211	10.8 274
Thickness of flange (not include ¼" raised face)	D			1.25 32	1.50 38	1.88 48
Center to top of stem	E	4.3 109	4.7 119	6.5 165	8.1 206	8.6 218
Center to bottom of body	F	1.8 46	2.1 53	3.2 81	4.5 114	5.0 127
Clearance required to remove sealant fitting	G	6.9 175	7.4 188	9.2 234	10.7 272	11.2 284
Width of stem flats	J	.81 21	.88 22	1.12 28	1.38 35	1.38 35
Diameter of stem	K	1.09 28	1.22 31	1.59 40	1.97 50	1.97 50
Height of stem flats	L	.8 20	.9 23	1.1 28	1.3 33	1.3 33
Extreme width of body, Figure 824	M	3.2 81	3.3 84	6.3 160	7.8 198	
Diameter of ¼" raised face	O			3.6 91	5.0 127	6.2 157
Size of wrench	—	SN-1	E-9	K-9	M-9	M-9
Length of wrench	—	7.0 178	7.0 178	14.0 356	34.0 864	34.0 864
Size of Sealant Stick	—	B	B	B	B	B
Weight (approx.) Figure 824	—	7 3	10 5	38 17	82 37	
Weight (approx.) Figure 825	—			56 25	118 54	178 81

Flanges are drilled to American Hydraulic Class 800 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 824 and 825 valves conform to the following standards where applicable: ANSI B1.20.1; ANSI B16.1; API 5B; ASTM A126, Class B; and MSS SP-78. See page 34.

Flange dimensions and drilling are the same as for ANSI Class 600 steel flanges, except for flange thickness.

# Nordstrom Screwed and Bolted Gland-Type Iron Plug Valves


## Steam Jacketed

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

Figure 2815 – (Screwed Gland-Type), Flanged, Wrench-Operated, Sizes 1 through 3

Figure 2865 – (Bolted Gland-Type), Flanged, Wrench-Operated, Size 4

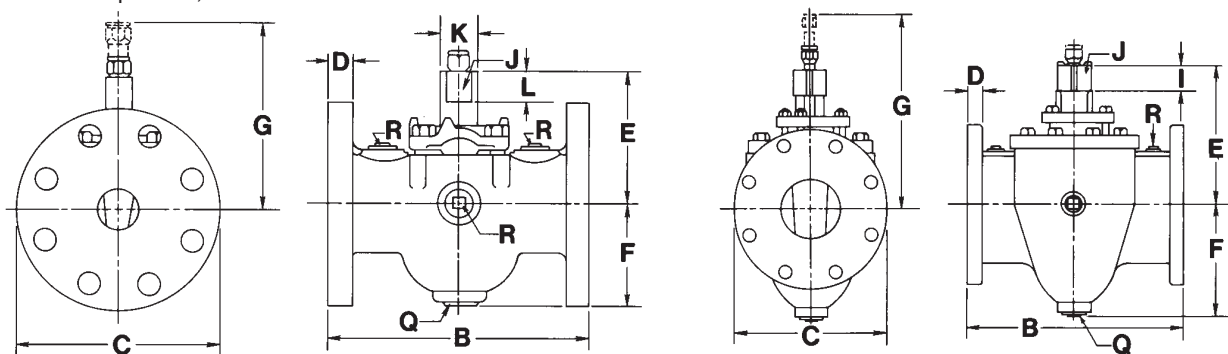

Size	NPS	1	2	3	4
	DN	(2x1x2) 25	(3x2x3) 50	(4x3x4) 80	(6x4x6) 100
Face-to-face, flanged, Figure 2815 and 2865	B	7.50 191	9.25 235	12.00 305	16.00 406
*Diameter of flange (flange diameter is one or more sizes larger than normal)	C	6.0 152	7.5 191	9.0 229	11.0 279
Thickness of flange	D	.63 16	.75 19	.94 24	1.00 25
Center to top of stem	E	4.1 104	5.7 145	7.0 178	9.6 244
Center to bottom of body	F	3.1 79	4.6 117	5.6 142	8.4 213
Clearance required to remove sealant fitting	G	6.7 170	8.3 211	9.6 244	13.5 343
Width of stem flats/square	J	.88 22	1.13 29	1.38 35	1.75 44
Diameter of stem, Figure 2815	K	1.2 30	1.6 41	1.9 48	
Height of stem flats/square	L	1.0 25	1.4 36	1.8 46	1.8 46
Size of steam connections in bottom of body (NPT and mm)	Q	.75 19	1.50 38	1.25 32	2.00 51
No. and size of steam connections in sides and throats of body	R	four 1/2" 15	**	four 1" 25	four 1 1/4" 32
Size of wrench	—	E-8	K-8	M-8	P-2
Length of wrench	—	7.0 178	14.0 356	21.0 533	27.0 686
Size of Sealant Stick	—	B	B	B	D
Weight (approx.) Figure 2815	—	22 10	49 22	99 45	
Weight (approx.) Figure 2865	—				216 98

Flanges are drilled to ANSI Class 125 Cast Iron Flange Standard Template. For drilling and bolting data, See page 40.

Figures 2815 and 2865 valves conform to the following standards where applicable: ANSI B16.1; ASTM A126, Class B; and MSS SP-78. See page 34.

\*Note: Drilling template is determined by diameter of valve flanges, which are one or more sizes larger than nominal size valve.

\*\*Two size 1 (DN 25) in sides - two size 3/4 (DN 20) in throats.

Jackets are designed for maximum saturated steam pressure of 160 psi (11 bar).


# Nordstrom Bolted Gland-Type Iron Plug Valves

## Style 38 Compression Ends for Steel Pipe

200 CWP (13.8 bar)

400 psig (27.6 bar) Test

Figure 24191 – Wrench-Operated, Six Bolt End, Size 6

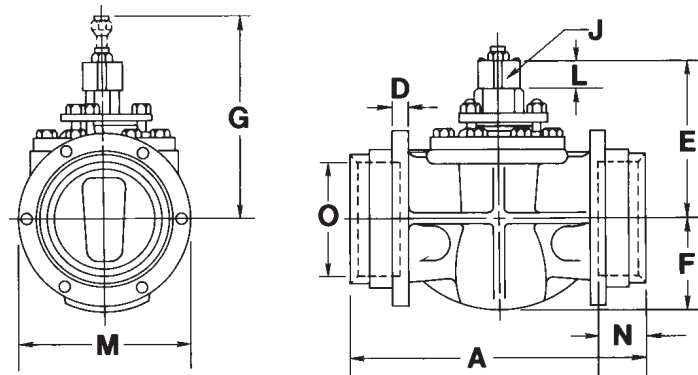

Size	NPS DN	6 150
End-to-end, Figure 24191	A	18.00 457
Center to top of stem	E	9.6 244
Center to bottom of body	F	5.4 137
Clearance required to remove sealant fitting	G	13.7 348
Width of stem square	J	1.75 44
Height of stem square	L	1.8 46
Extreme width of body	M	10.4 264
Depth of hub bore	N	2.5 64
Minimum inside diameter of hub	O	6.7 170
Size of wrench	—	P-2
Length of wrench	—	27.0 686
Size of Sealant Stick	—	D
Weight (approx.) Figure 24191	—	163 74

Body and plug material conform to ASTM A126, Class B and MSS SP-78. See page 34.




# Super Nordstrom Two-Bolt, Cover-Type Iron Plug Valves

## Grooved Ends for Steel Pipe

200 CWP (13.8 bar)  
400 psig (27.6 bar) Test

Figure 23144 – Wrench-Operated, Sizes 2, 3 and 4

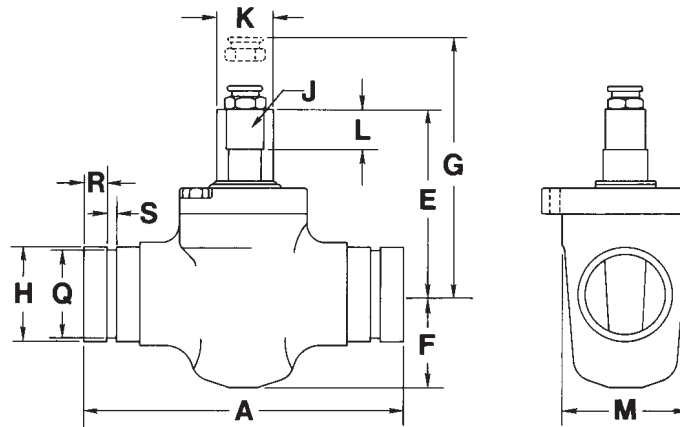

Size	NPS DN	2 50	3 80	4 100
End-to-end, Figure 23144	A	8.00 203	9.50 241	10.75 273
Center to top of stem	E	4.7 119	5.6 142	6.3 160
Center to bottom of body	F	2.4 61	3.4 86	4.0 102
Clearance required to remove sealant fitting	G	6.4 163	7.2 183	8.0 203
Outside diameter of hub	H	2.38 60	3.50 89	4.50 114
Width of stem flats	J	1.00 25	1.25 32	1.25 32
Diameter of stem	K	1.38 35	1.75 44	1.75 44
Height of stem flats	L	1.0 25	1.3 33	1.3 33
Extreme width of body	M	3.2 81	4.0 102	4.8 122
Diameter of hub groove	Q	2.24 57	3.34 85	4.33 110
Length of finish portion of hub	R	.56 14	.56 14	.61 15
Width of groove	S	.26 7	.26 7	.31 8
Size of Sealant Stick	—	B	B	B
Size of wrench	—	SN-2	SN-4*	SN-4*
Length of wrench	—	10.5	17.5	15.0
Weight (approx.) Figure 23144	—	267 6	445 12	381 21

Figure 23144 valve is not recommended for temperatures above +200°F (+93°C).

Grooved couplings are not supplied with valves.

Body and plug material conform to ASTM A-126, Class B and MSS SP-78. See page 34.

\* Use the longer SN-3 wrench for valves used in cold climates such as Canada.

# Conformance to Standard Specifications

Wherever applicable, iron plug valves by Nordstrom Valves conform to the latest edition of the following standard specifications as to pressure ratings, dimensions and

construction. Consult your Nordstrom customer service representative for additional information.

## ANSI – AMERICAN NATIONAL STANDARDS INSTITUTE

- B1.20.1** Pipe Threads, General Purpose (Inch)
- B16.1** Cast Iron Pipe Flanges and Flanged Fittings (except valves having slightly thicker flanges)
- B16.10** Face-to-face and End-to-end Dimensions of Valves

## API – AMERICAN PETROLEUM INSTITUTE

- 5B** Threading, Gaging, and Thread Inspection of Casing, Tubing, and Line Pipe Threads

## CGA – CANADIAN GAS ASSOCIATION

- 3.11** Lever-Operated Pressure-Lubricated Plug-Type Gas Shut-Off Valves (Figures 114 and 115 only)

## DOT - UNITED STATES DEPARTMENT OF TRANSPORTATION

- 49 CFR PART 192** Pipeline Safety Regulations

## FMSA – FACTORY MUTUAL SYSTEM APPROVED

- Bulletin 6-18** Loss Prevention Data (Figures 114FM and 115FM only)

## ISO 9001 CERTIFIED

## MSS – MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY

- SP-6** Standard Finish for Contact Faces of Pipe Flanges and Connecting-End Flanges of Valves and Fittings
- SP-25** Standard Marking System for Valves, Fittings, Flanges and Unions
- SP-78** Cast Iron Plug Valves, Flanged and Threaded Ends



Skids of Nordstrom iron plug valves await shipment to over 500 strategically-located distributor branch stores throughout the U.S.

## Gas Safety Control Valves Approved by Factory Mutual Laboratories

A positive method of preventing fuel explosions in multi-burner gas-fired industrial furnaces, ovens, dryers, and boilers, has been developed by the Factory Mutual Engineering and Research Corporation. This method is described in detail in Factory Mutual Engineering and Research Corporation Loss Prevention Bulletin Number 6-18.

Briefly, the method of assuring closure of all individual burner cocks before the main burner gas safety shutoff valve can be opened is a **Supervising Cock and Gas Safety Control System**. The **Supervising Cock**, a Nordstrom valve,

is similar to a standard Nordstrom valve except that it incorporates two side outlets, which are connected in series with copper tubing to adjacent valves, so that when the gas passages of all valves are closed, a new continuous passageway is provided through all of the closed valves in the system.

The special Nordstrom valves shown below have been approved by Factory Mutual Engineering and Research Corporation for use as **Supervising Cocks in Gas Safety Control Systems**.

Valve Figure Number	Iron Pipe Size DN	Maximum Rated Operating Pressure (psig/bar)	Copper Tubing Checking System Connections Iron Pipe Size
Figure 114 FM	½, ¾, 1, 1½, 2, 3 15, 20, 25, 40, 50, 80	50 3.5	Size 2 and smaller - ½
Figure 115 FM	1, 1½, 2, 2½, 3, 4 25, 40, 50, 65, 80, 100	50 3.5	Size 2½ and larger - ¼

**Notes:**

1. Connection piping is not provided. Valves shipped with pipe plugs in lieu of piping.
2. Suitable for manufactured, natural, propane and butane gases.
3. Above valves are made on special order and require special wrenches that are permanently doweled to each valve.
4. Factory Mutual approved valves should only be lubricated in full open or full closed positions.

## Actuators for Nordstrom and Super Nordstrom Valves

Nordstrom Valves can supply hydraulic, pneumatic or electric power actuators for mechanical operation of Nordstrom and Super Nordstrom valves. To obtain equipment in close conformance with customer requirements, the following information should be provided at the time of the inquiry:


1. Valve size and pressure class:
  - A. If the power actuator is being ordered for field conversion, describe the actuator currently installed on the valve.
2. Type of actuator desired:
  - A. Hydraulic
  - B. Pneumatic
  - C. Electric
3. Maximum differential pressure across valve during operation.
4. Speed of operation required in minutes or seconds:
  - A. To open
  - B. To close
5. Frequency of operation.
6. For an electric operator, specify:
  - A. AC or DC voltage
  - B. Single or 3 phase
  - C. Type of motor:
    1. Explosion-proof
    2. Weatherproof
    3. Other
  - D. Frequency
7. If pneumatic or hydraulic actuator is desired, specify:
  - A. Minimum and maximum pressure available.
- B. Operating medium:
  1. Gas
  2. Air
  3. Fluid (specify type)
- C. Accessory equipment desired:
  1. Filter
  2. Pump
  3. Control valving:
    - a. electrically operated
    - b. manually operated
    - c. pilot operated
8. Position indicator (visual indicator on valves is standard):
  - A. Remote reading:
    1. Selsyn
    2. Potentiometer
9. Full instrumentation to be furnished by:
  - A. Nordstrom Valves
  - B. Others

## Gearing



### Simple Worm Gearing for Valves with Side-Mounted Handwheel

Simple worm gearing enclosed in a weatherproof housing is used on Nordstrom Valves. An indicator on top readily shows the valve operating position. This gearing is adaptable for mounting electric actuators. Worm gear operating mechanisms are built to withstand abuse under all types of conditions. Wear tests have proven them reliable for thousands of cycles at full rated output of the unit.

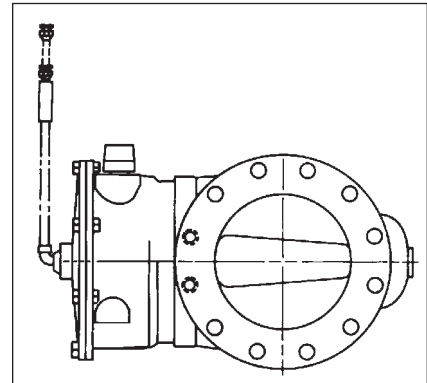


### Worm Gearing for Buried Service

Standard iron valves for typical buried services (such as those found in water works) can be factory modified to provide watertight worm gearing that includes a two-inch operating nut and a bent sealant pipe. This modification protects the valve plug stem and brings sealant injection to ground level. With this buried worm gearing, the valve is operated with a tee-handle socket wrench.

## Sealant Fittings


The Nordstrom Valves Sealant Fitting is standard equipment on all Nordstrom valves. The fitting is equipped with a cylindrical spring-loaded check valve which is superior to run-of-the-mill ball check fittings which may trap dirt and subsequently be pumped into the valve. Nordstrom Valves Sealant Fittings also allow both manual and automatic sealant injection without need for other special fittings. It is available separately, in several sizes, as a replacement for damaged fittings or the lube screw on older design Nordstrom valves still in service.

Sealant Stick Size	Parallel Thread Size	Carbon Steel Fitting Part Number
B	1/4"	3000711
C	3/8"	37416
D	1/2"	37417
G	3/4"	37418



## Integral Locking System Valves

Super Nordstrom Two-Bolt, Cover-Design valves with the Integral Locking System (ILS) help prevent accidental operation or tampering of the valve while allowing you to lock or seal the valve quickly and easily. Available in sizes 2, 3 and 4. See Sales Brochure SN-150.


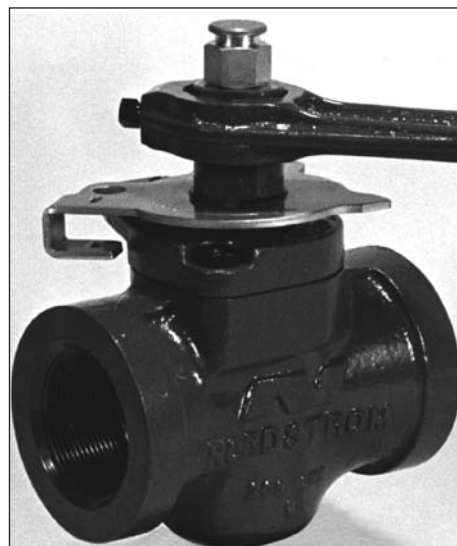


# Locking Devices For Wrench-Operated Valves


Locking devices can be used to lock or seal wrench-operated valves in either the open or closed position. The device encloses the cover or cover and gland of the valve thus preventing removal of, or tampering with, these parts.

Locking devices are available for all sizes and types of wrench operated valves. When ordering a locking device, specify the size and figure number of the valve.

(A) Super Nordstrom iron plug valve with locking hood attached.



(B) Super Nordstrom iron plug valve with locking wrench used as a locking device.




(C) Locking device attached to valve with screwed-type gland without stop collar.

(D) Locking Device attached to valve with screwed-type gland (800 CWP).



(E) Locking device attached to valve with bolted-type gland.



## For Super Nordstrom Two-Bolt, Cover-Type Valves

### A – Plain Locking Device

Size	1/2, 3/4, 1	1 1/4, 1 1/2, 2 & 2 1/2	3	4 & 5
<b>Part Description</b>	<b>Part Number</b>			
Hood	3001225	3001115	3001153	3001155
Chain Assembly	2753423	2753423	2753424	2753425
Complete Assembly	2752670	2752671	2752672	2752673

### B – Combination Reversible Locking Device and Wrench

Size	1/2, 3/4, 1	1 1/4, 1 1/2, 2, 2 1/2	3	4 & 5
<b>Part Description</b>	<b>Part Number</b>			
Locking Wrench	2752770	3001165	2752771	2752772
Chain Assembly	2753426	2753427	2753428	2753429
Complete Assembly	2752861	2752862	2752863	2752864

## For Screwed Type Gland Valves

### C – Without Stop Collars 200, 400 and 500 CWP

Size	1/2, 3/4, 1	1 1/4*	1 1/2**	2	2 1/2	3 & 4
<b>Part Description</b>	<b>Part Number</b>					
Hood	57563	57564	2889	15627	15633	15635 45801
Yoke	57565	57565	15505	15629	15634	15636 45802
Cap Screw	None	None	910083	910109	None	None
Washer	None	None	15668	15668	None	None
Complete Assembly	20670	20671	24591	20673	20674	20675 20676

\*Threaded \*\*Flanged 1 1/4

### D – With Stop Collars 800 CWP

Size	1/2 & 3/4, 1	1 1/4, 1 1/2	2	2 1/2	3 & 4
<b>Part Description</b>	<b>Part Number</b>				
Hood	85998	85999	86000	86001	86002 86003
Yoke	85941	85942	85943	85944	85945 85946
Complete Assembly	86032	86033	86034	86035	86036 86037

## E – For Nordstrom Bolted Gland Type Steel Valves

### For Figure No. and Sizes:

- Figure 143 . . . . .Size 10
- Figure 165 . . . . .Sizes 6 and 8
- Figure 185 . . . . .Size 10
- Figure 265 . . . . .Size 6
- Figure 1485 . . . . .Size 10

Use	
Part Description	Part No.
Hood	57629
Locking Clip	57613
Dart and Chain	57734
Complete Assembly	58092


### For Figure No. and Sizes:

- Figure 143 . . . . .Sizes 6 and 8
- Figure 164 . . . . .Size 4
- Figure 165 . . . . .Size 4
- Figure 185 . . . . .Sizes 6 and 8
- Figure 265 . . . . .Size 4
- Figure 1485 . . . . .Sizes 6 and 8
- Figure 1585 . . . . .Sizes 6 and 8
- Figure 24191 . . . . .Size 6

Use	
Part Description	Part No.
Hood	57630
Locking Clip	45926
Dart and Chain	57734
Complete Assembly	58093


# Wrenches

## Wrenches for Valves With Square or Oround Stems

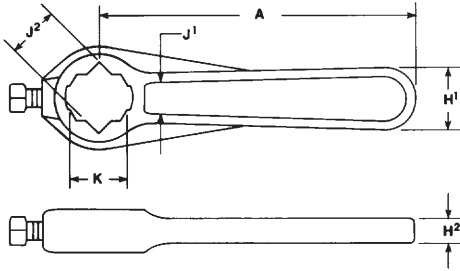


Size	Part #	Weight	A	H <sup>1</sup>	H <sup>2</sup>	J <sup>1</sup>	J <sup>2</sup>	K
SN-1	3001198	.9	7.0	1.1	.4	.81	.89	1.10
		.4	178	28	10	21	23	28
SN-2	3001197	1.7	10.5	1.5	.5	1.00	1.10	1.41
		.8	267	38	13	25	28	36
SN-3	3001196	5.6	25.0	1.8	.6	1.25	1.50	1.82
		2.5	635	46	15	32	38	46
SN-4	2756546	4.8	15.0	1.8	.6	1.25	1.50	1.82
		2.2	381	46	15	32	38	46

## Wrenches for Valves With Square Heads (Up To Size 5)




Size	Part No.	Weight	A	B (Diameter)	C	D	J
P-2	8889	6	27.0	1.7	5.5	25.2	1.84
		3	686	43	140	640	47
T-2	8148	11	36.0	1.9	6.7	34.3	2.09
		5	914	48	170	871	53
V-2	8890	15	48.0	1.9	7.0	45.5	2.56
		7	1219	48	178	1156	65

## Wrenches for Valves With Square Heads (Size 6 and Larger)

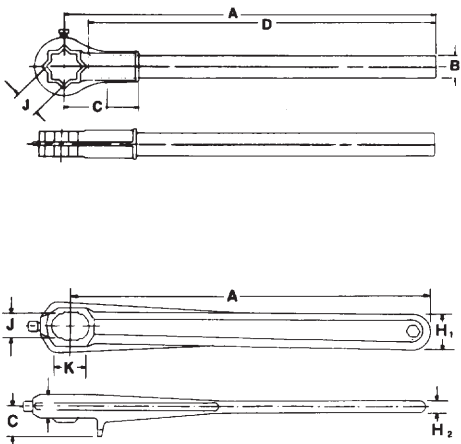

Size	Part No.	Weight	A	B	C	H1	H2	J	K
D-8	13340	.8	5.5	.8	1.2	1.1	.4	.81	1.10
		.4	140	20	30	28	10	21	28
E-8	13341	1.0	7.0	.8	1.3	1.3	.5	.88	1.23
		.5	178	20	33	33	13	22	31
H-8	13342	1.3	9.0	.9	1.3	1.4	.5	.94	1.32
		.6	229	23	33	36	13	24	34
J-8	13343	1.8	10.5	.9	1.3	1.5	.5	1.00	1.41
		.8	267	23	33	38	13	25	36
K-8	30535	2.3	14.0	1.1	1.4	1.6	.6	1.13	1.60
		1.0	356	28	36	41	15	29	41
L-8	13345	4.0	17.5	1.2	1.6	1.8	.6	1.25	1.79
		1.8	445	30	41	46	15	32	45
M-8	13346	5.5	21.0	1.3	1.7	1.9	.6	1.38	1.98
		2.5	533	33	43	48	15	35	50

## Wrenches for Valves With Square Heads (Size 6 and Larger)

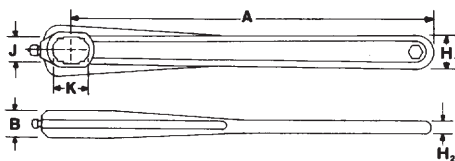

Size	Part #	Weight	A	B	H1	H2	J	K
E-9	15105	1.0	7.0	.8	1.3	.5	.88	1.23
		.5	178	20	33	13	22	31
H-9	15106	1.3	9.0	.9	1.4	.5	.94	1.32
		.6	229	23	36	13	24	34
K-9	15108	2.5	14.0	1.1	1.6	.6	1.13	1.60
		1.1	356	28	41	15	29	41
L-9	15109	3.8	17.5	1.2	1.8	.6	1.25	1.79
		1.7	445	30	46	15	32	45
M-9	15110	5.5	21.0	1.3	1.9	.6	1.38	1.98
		2.5	533	33	48	15	35	50

# Square Adapters

## For Wrench-Operated Valves

Adapters are available for all sizes and types of wrench-operated valves. All adapters have 2" (51mm) square wrench flat, so that all valves fitted with adapters may be operated with a single lever or socket wrench having 2" (51mm) square opening.

### 2" Square Adapters for Valves with Obround Wrench Heads



#### Valves With Stop Collars

Distance Across Flats of Obround Wrench Head on Valve (See Dimension "J") *	Adapter Part No.
.81 21	12180
.88 22	12181
.94 24	12182
1.00 25	12183
1.12 29	12184
1.25 32	12185
1.38 35	12186

\* For dimension "J" refer to valve dimension tables.




#### Valves With Stop Collars

Distance Across Flats of Obround Wrench Head on Valve (See Dimension "J") *	Adapter Part No.
.81 21	3713
.88 22	3714
.94 24	3715
1.00 25	2755338 <sup>(1)</sup>
1.12 29	3717
1.25 32	3718
1.38 35	3719

\* For dimension "J" refer to valve dimension tables.

<sup>(1)</sup> Supersedes adapter 3716.

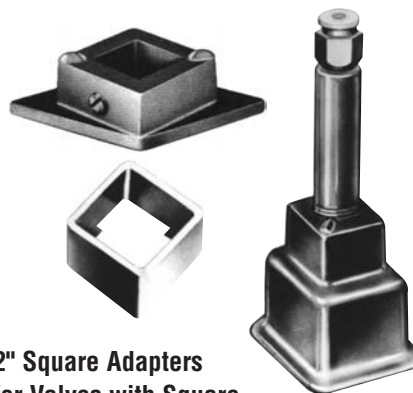

### 2" Square Adapters for Valves with Square Wrench Heads


Distance Across Flats of Square Stem Head on Valve (See Dimension "J") *	Adapter Part No.
.83 21	63530
.91 23	63531
1.06 27	63532
1.25 32	63533
1.44 37	63588
1.50 38	63588
1.59 40	63589
1.75 44	1277
2.00 51	None Required
2.44 62	27002 <sup>(1)</sup>
2.50 64	27002 <sup>(1)</sup>

\* For dimension "J" refer to valve dimension tables.

<sup>(1)</sup> Assembly includes adapter, sealant nipple and sealant fitting.


# Drilling Templates, Flange Dimensions and Bolting Data

## For Cast Iron Flanges

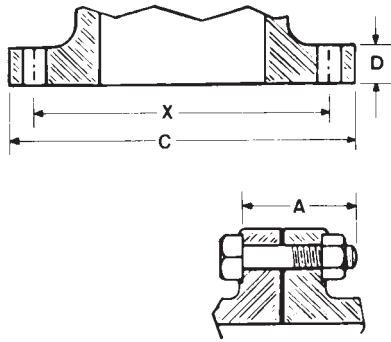

### Class 125 Cast Iron Flange Standard (ANSI B16.1)

Nominal Pipe Size	Diameter of Flange C	*Thickness of Flange D	Diameter of Bolt Circle X	No. of Bolts	Diameter of Bolts	Length A
1	4.25	.44	3.12	4	1/2	1.75
1 1/4	4.62	.50	3.50	4	1/2	2.00
1 1/2	5.00	.56	3.88	4	1/2	2.00
2	6.00	.62	4.75	4	5/8	2.25
2 1/2	7.00	.69	5.50	4	5/8	2.50
3	7.50	.75	6.00	4	5/8	2.50
4	9.00	.94	7.50	8	5/8	3.00
5	10.00	.94	8.50	8	3/4	3.00
6	11.00	1.00	9.50	8	3/4	3.25
8	13.50	1.12	11.75	8	3/4	3.50
10	16.00	1.19	14.25	12	7/8	3.75
12	19.00	1.25	17.00	12	7/8	3.75
14	21.00	1.38	18.75	12	1	4.25
16	23.50	1.44	21.25	16	1	4.50
18	25.00	1.56	22.75	16	1 1/8	4.75
20	27.50	1.69	25.00	20	1 1/8	5.00
24	32.00	1.88	29.50	20	1 1/4	5.50
30	38.75	2.12	36.00	28	1 1/4	6.25
36	46.00	2.50	42.75	32	1 1/2	8.25

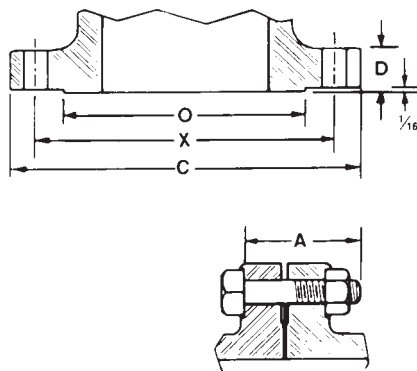

### Class 250 Cast Iron Flange Standard (ANSI B16.1)

Nominal Pipe Size	Diameter of Flange C	Thickness of Flange D	Diameter of Raised Face O	Diameter of Bolt Circle X	Number of Bolts	Diameter of Bolts	Length** of Bolts A
1	4.88	.69	2.69	3.50	4	5/8	2.50
1 1/4	5.25	.75	3.06	3.88	4	5/8	2.50
1 1/2	6.12	.81	3.56	4.50	4	3/4	2.75
2	6.50	.88	4.19	5.00	8	5/8	2.75
2 1/2	7.50	1.00	4.94	5.88	8	3/4	3.25
3	8.25	1.12	5.69	6.62	8	3/4	3.50
4	10.00	1.25	6.94	7.88	8	3/4	3.75
5	11.00	1.38	8.31	9.25	8	3/4	4.00
6	12.50	1.44	9.69	10.62	12	3/4	4.25
8	15.00	1.62	11.94	13.00	12	7/8	4.75
10	17.50	1.88	14.06	15.25	16	1	5.50
12	20.50	2.00	16.44	17.75	16	1 1/8	5.75
14	23.00	2.12	18.94	20.25	20	1 1/8	6.00
16	25.50	2.25	21.06	22.50	20	1 1/4	6.50
18	28.00	2.38	23.31	24.75	24	1 1/4	6.75
20	30.50	2.50	25.56	27.00	24	1 1/4	7.00
24	36.00	2.75	30.25	32.00	24	1 1/2	7.75

\* Some Nordstrom Iron valve flanges are thicker than ANSI Class 125 and Class 250 Cast Iron flanges. See valve dimension tables. In some cases bolt lengths shown above are longer than standard.

Note: Always check thickness of valve flanges, gaskets and companion flanges to determine correct bolt lengths required.


\*\* Certain valves have tapped holes in each end flange requiring use of studs or cap screws. For quantity and size see tables on page 41.

\*\* Certain other valves have a limited amount of clearance behind the flange at some bolt hole locations. When this condition is encountered, two to four bolts will have to be shortened or bolt-studs substituted.

Bolt holes are drilled 1/8 inch larger than the diameter of the bolt. Drilling templates are in multiples of four holes so that the valves may be turned in any quarter when being installed. Bolt holes straddle the centerline.



**American Hydraulic Class 800 Cast Iron Flange Standard**

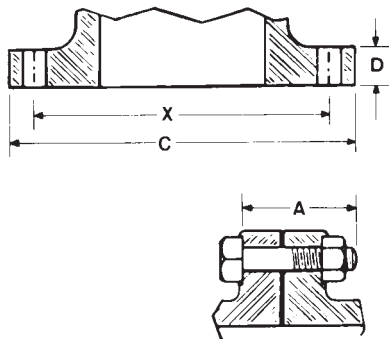

Nominal Pipe Size	Diameter of Flange C	Thickness of Flange D	Diameter of Raised Face O	Diameter of Bolt Circle X	Number of Bolts	Length of Bolts		
						Diameter of Bolts	Male to Male A	Male to Female B
2	6.50	1.25	3.62	5.00	8	5/8	3.75	3.50
2½	7.50	1.38	4.12	5.88	8	¾	4.25	4.00
3	8.25	1.50	5.00	6.62	8	¾	4.50	4.25
4	10.75	1.88	6.19	8.50	8	7/8	5.50	5.25
5	13.00	2.12	7.31	10.50	8	1	6.00	5.75
6	14.00	2.25	8.50	11.50	12	1	6.25	6.00
8	16.50	2.50	10.62	13.75	12	1½	7.00	6.75
10	20.00	2.88	12.75	17.00	16	1¼	7.75	7.50
12	22.00	3.00	15.00	19.25	20	1¼	8.00	7.75

Bolt holes are drilled 1/8 inch larger than the diameter of the bolt. Drilling templates are in multiples of four holes so that the valves may be turned in any quarter when being installed. Bolt holes straddle the centerline unless otherwise ordered.



## Cap Screws and Studs

### For Valves with Tapped Holes in End Flanges

The valves listed below have tapped holes in each end flange and require the use of cap screws or studs. Use the tables below to determine quantity, diameter and length required for each flange.

Figure Number	Wrench-Operated	Worm-Gear-Operated	Nominal Size of Valve								
			2	2½	3	4	5	6	8	10	12
<b>CAP SCREWS</b>											
305			4-5/8 x 2.00	—	2-3/4 x 2.50	—	—	—	—	—	—
143	149		—	—	—	—	2-3/4 x 2.00	2-3/4 x 2.00	2-7/8 x 2.25	2-7/8 x 2.50	
1485	1489		—	—	—	—	2-3/4 x 3.00	2-7/8 x 3.75	2-1 x 4.00	4-1/8 x 3.50	
1585	1589		—	—	—	—	—	2-7/8 x 3.75	2-1 x 4.25	2-1/8 x 3.50	
185	189		—	—	—	—	4-3/4 x 2.00	4-3/4 x 2.00	2-7/8 x 2.25	—	
<b>STUDS</b>											
305			4-5/8 x 2.75	—	2-3/4 x 3.50	—	—	—	—	—	
143	149		—	—	—	—	2-3/4 x 3.00	2-3/4 x 3.25	2-7/8 x 3.50	2-7/8 x 3.75	
1585	1589		—	—	—	—	—	2-7/8 x 4.50	2-1 x 5.00	2-1/8 x 4.75	
1485	1489		—	—	—	—	2-3/4 x 3.50	2-7/8 x 4.00	2-1 x 4.50	4-1/8 x 4.75	
185	189		—	—	—	—	4-3/4 x 2.88	4-3/4 x 3.00	2-7/8 x 3.25	—	

(Cap Screws and Studs are National Coarse Thread Series)

# Recommended Pressure-Temperature Ratings and Hydrostatic Shell Test Pressures

For Nordstrom and Super Nordstrom Iron Plug Valves

## Pressure in psig

Working Pressure Temperature in °F	120 CWP	150 CWP	200 CWP*	300 CWP	400 CWP	500 CWP	800 CWP
-20 to 150	120	150	200	300	400	500	800
200	110	135	190	280	370	460	—
225	105	130	180	270	355	440	—
250	100	125	175	260	340	415	—
275	95	120	170	250	325	395	—
300	90	110	165	240	310	375	—
325	85	105	155	230	295	355	—
353	80	100	150	220	280	335	—

<b>Hydrostatic Shell Test Pressure</b>	<b>240</b>	<b>300</b>	<b>400</b>	<b>600</b>	<b>800</b>	<b>1000</b>	<b>1600</b>
<b>Seat Test Pressure</b>	<b>180</b>	<b>225</b>	<b>300</b>	<b>450</b>	<b>600</b>	<b>750</b>	<b>1200</b>

## Pressure in bar

Working Pressure Temperature in °C	8.3 bar MWP	10.3 bar MWP	13.8 bar MWP*	21.0 bar MWP	28.0 bar MWP	34.0 bar MWP	55.0 bar MWP
-29 to 65	8.3	10.3	13.8	21.0	28.0	34.0	55.0
80	7.6	9.8	13.3	20.0	26.0	33.0	—
100	7.2	9.2	12.7	19.0	25.0	31.0	—
120	6.9	8.6	12.1	18.0	24.0	29.0	—
135	6.6	8.3	11.7	17.2	22.0	27.0	—
140	6.2	8.0	11.5	17.0	22.0	27.0	—
149	5.9	7.2	10.7	15.9	20.0	24.0	—
178	5.5	6.9	10.3	15.2	19.3	23.0	—

<b>Hydrostatic Shell Test Pressure</b>	<b>16.6</b>	<b>21.0</b>	<b>28.0</b>	<b>41.0</b>	<b>55.0</b>	<b>69.0</b>	<b>110.0</b>
<b>Seat Test Pressure</b>	<b>12.5</b>	<b>15.5</b>	<b>20.7</b>	<b>31.5</b>	<b>42.0</b>	<b>51.0</b>	<b>82.5</b>

\* Super Nordstrom valves should not be used at temperatures above 200°F (80°C) because of packing material limitations.

## Test Times (minutes)

	Valve Sizes	Hydrostatic Shell Test Time	Hydrostatic Seat Test Time
Super Nordstrom and Screwed Gland	½ through 4	½	1
	4 through 8	1	1
Bolted Gland Valves	10 through 18	1	1
	20 and larger	3	2

## Super Nordstrom Two-Bolt, Cover-Type Valve Typical Materials of Construction

Part Name	Standard Construction
Body	Gray Iron
Plug and Stem	Gray Iron
Cover	Ductile Iron
Cover Bolting	A449-SAEGr5
Spring	Stainless Steel
Cover Seal	Buna-N
Stem Seal	TFE
Weatherseal	Buna-N
Sealant Fitting	Carbon Steel
Check Valve	Carbon Steel


## Nordstrom Screwed Gland-Type Valve Typical Materials of Construction

Part Name	Standard Construction
Body	Gray Iron
Cover	Malleable Iron
Plug and Stem	Gray Iron
Gland	Carbon Steel
Cover Bolting	A449-SAEGr5
Gland / Stem Seals	Buna-N
Seal Holder	Carbon Steel
Gasket	Asbestos-Free Sheet Gasket Material
Diaphragm	Stainless Steel
Check Valve	Carbon Steel
Sealant Fitting	Carbon Steel
Washer	Carbon Steel
Weatherseal	Polyethylene

## Nordstrom Bolted Gland-Type Valve Typical Materials of Construction

Part Name	Standard Construction
Body	Gray Iron
Cover	Hi Elon Iron
Plug and Stem	Gray Iron
Gland	Hi Elon Iron
Cover Bolting	A449-SAEGr5
Gland Bolting / Nuts	A193GrB7 / A307GrB
Gaskets	Asbestos-Free Sheet Gasket Material
Diaphragm	Stainless Steel
Gland / Stem Seals	Buna-N
Check Valve	Carbon Steel
Sealant Fitting	Carbon Steel

## Around The World, Nordstrom Valves® Lubricated Plug Valves Have Worked For Over 70 Years —

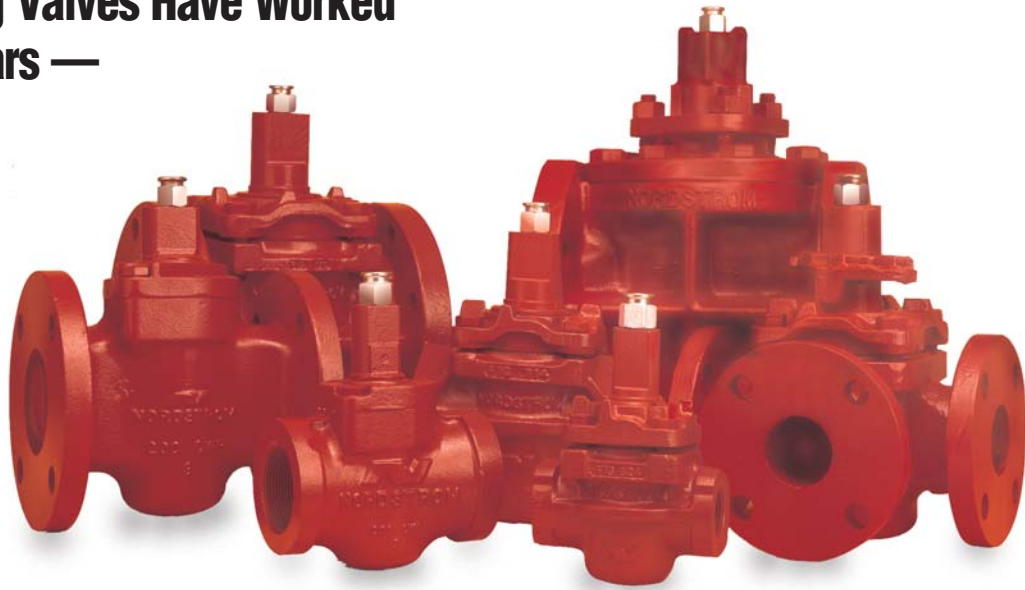

### Get The Nordstrom Valves Edge...

• Value • Quality • Dependability

#### Authorized Distributors

**For detailed information on these and other Nordstrom Valves products, call your customer service representative for the name and number of the nearest authorized Nordstrom Valves distributor.**

1511 Jefferson Street  
Sulphur Springs, Texas 75482  
USA  
1-800-225-6989

Email: [nmkt@flowsERVE.com](mailto:nmkt@flowsERVE.com)  
or visit [www.flowsERVE.com](http://www.flowsERVE.com)

United States:  
Telephone: 903-885-4691 or 4693  
FAX: 903-439-3411

Latin America:  
Telephone: 903-439-3407  
FAX: 903-439-3411

Other Countries:  
Telephone: 903-885-4692  
FAX: 903-439-3404



*Nordstrom Valves*

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

For more information about Flowserve Corporation, contact [www.flowsERVE.com](http://www.flowsERVE.com) or call USA 1 800 225 6989.