


PRODUCT SPECIFICATION DRAWING

HOLDRITE® #114-CO

Supports flush valves on carriers

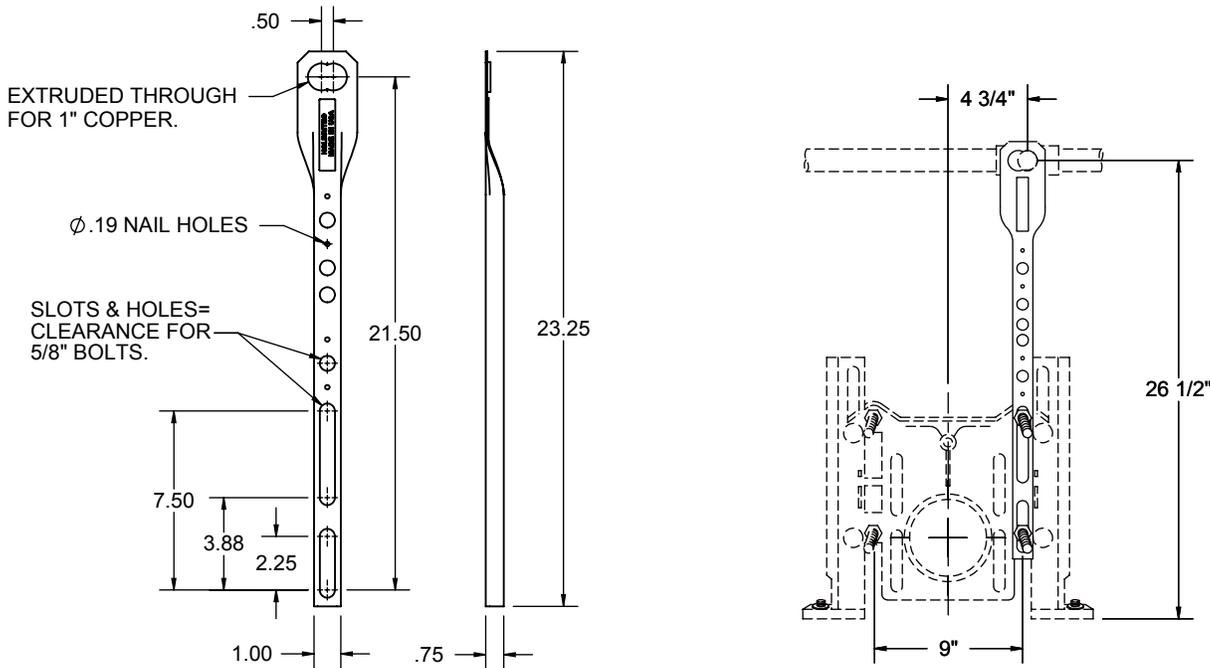

ALL DIMENSIONS IN INCHES

This heavy-gage Copper-Bonded™ #114-CO offset carrier bracket mounts directly to a 4-bolt siphon jet closet carrier and positions the flush valve at 14" above the top carrier mounting bolt, and offsets it 4-3/4" from the center of the carrier. A patent pending "Figure 8" hole pattern on top provides 1/4" left or right offset for flush valve support providing a single bracket to be used in a left or right hand installation while providing the desired 4-3/4" center line rough-in. This installation typically places the flush valve at 11-1/2" above the fixture. When soldering, heat the pipe, not the bracket.

Product Information:

- Material: 16 gage CRS, Copper-Bonded™
- Works with all 4 bolt siphon jet carriers
- Unique flush valve support hole accommodates a 4-3/4" center line rough-in
- Includes 1/2" holes for positioning various trap primers
- Works with current #114-C-EXT brackets
- UPC / IPC / IAPMO listed
- Patent Pending



THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM
 800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
 spec_114-CO_RevF

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	