



ELECTROFUSION COUPLING PE3408/PE4710


- Pin Type: 4.7S (4.7 Solid Pin)
- Approval: ASTM F1055
- Approval: NSF-61
- *Approval: ASTM D2513; AWWA C906
- **Approval: ASTM D2513; AWWA C906; FM1613; CL200
- ***Approval: AWWA C906

Note: Operating pressure is 200 psi for PE4710 couplings in allowable applications.

* Industrial Non-Compliant ASTM Fittings

** For use with Bar-Code Processor Only

Please call for more information on availability, pricing, other sizes and dimensions.

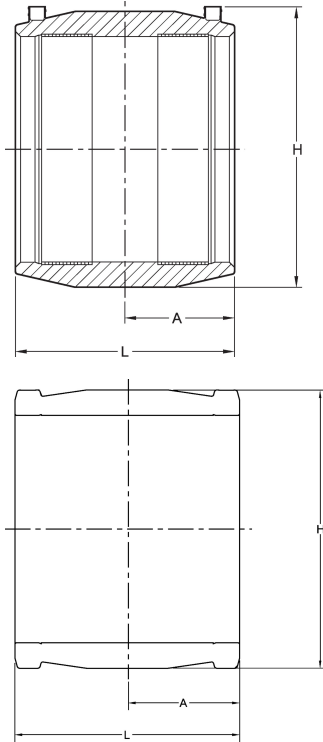

	Main Size (inch)	GFCP Part No.	GF weight Part No.	(lb)	H (inch)	L (inch)	A (inch)	Box Qty
*	2 CTS	10004580	360 000 919	0.463	3.59	4.37	2.18	40
***	4 DIPS	10000353	360 000 935	1.565	6.06	6.93	3.46	10
***	6 DIPS	10000354	360 000 938	5.975	8.74	8.19	4.09	8
	7 IPS	10003970	360 000 942	4.960	8.93	8.19	4.09	8
	8 DIPS	10000355	360 000 943	8.378	11.14	10.16	5.08	4
*	10 DIPS	10000356	360 000 901	15.344	13.70	10.90	5.50	1
**	10 IPS	10000362	360 000 903	15.234	13.10	10.50	5.00	1
***	12 DIPS	10000357	360 000 904	28.704	16.20	12.80	6.40	1
**	12 IPS	10000363	360 000 906	23.898	15.84	11.50	5.50	1