

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- Flexible supplies
- Matching finish sidespray
- Available with an 8-1/2" (21.6 cm), 10" (25.4 cm), or 12" (30.5 cm) swing spout reach
- 2.2 gallons (8.3 L) per minute maximum flow rate

Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:


- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations

KITCHEN SINK FAUCET K-15172

ADA

CSA B651

OBC

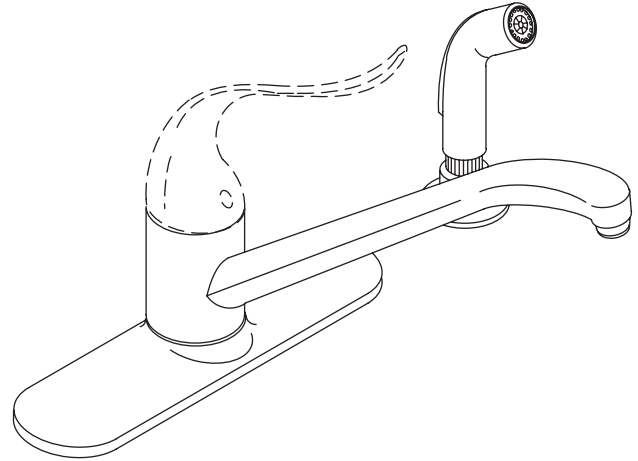

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Lever Handle		Loop Handle	
		ADA CSA B651 OBC		ADA CSA B651 OBC	
K-15172-F	Kitchen sink faucet – with 8-1/2" (21.6 cm) swing spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other____		
K-15172-FG	Kitchen sink faucet – with 12" (30.5 cm) swing spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other____		
K-15172-FL	Kitchen sink faucet – with 10" (25.4 cm) swing spout reach			<input type="checkbox"/> CP	<input type="checkbox"/> Other____

Product Specification

The single-control kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute. Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature flexible supplies and a matching finish sidespray. Product shall be available with an 8-1/2" (21.6 cm), 10" (25.4 cm), or 12" (30.5 cm) swing spout reach. Faucet shall be Kohler Model K-15172-____-____.

CORALAIS®


Optional Accessories

K-15179-A	12" (30.5 cm) swing spout and aerator	<input type="checkbox"/> CP	
1030920	Sidespray deep roughing-in kit		<input type="checkbox"/> NA
1160594	Large Spray 0.35 gpm (1.32 lpm) – Insert only		<input type="checkbox"/> NA
—	Additional flow options are available (refer to the Price Book)		<input type="checkbox"/> NA

Installation Notes

Install this product according to the installation guide.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

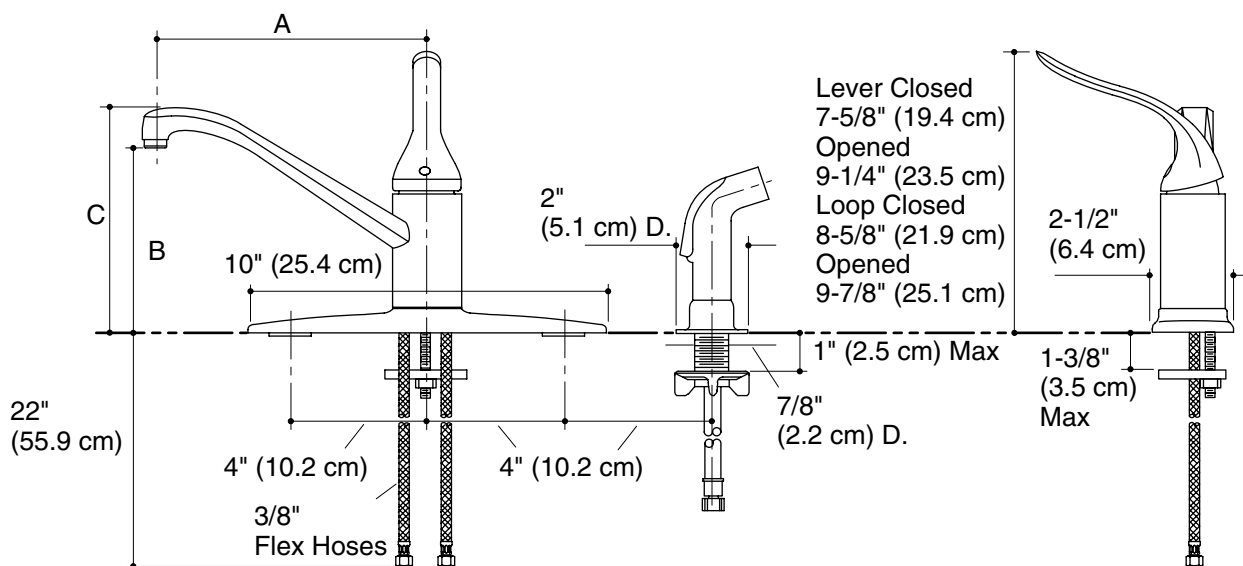

	A	B	C
K-15172-F	8-1/2" (21.6 cm)	5-1/8" (13 cm)	6-1/4" (15.9 cm)
K-15172-FL	10" (25.4 cm)	6-1/4" (15.9 cm)	7-1/4" (18.4 cm)
K-15172-FG	12" (30.5 cm)	6-5/16" (16 cm)	7-5/16" (18.6 cm)

Product Diagram