



BRONZE SPRING CHECK VALVE

943 & 947

250 WOG

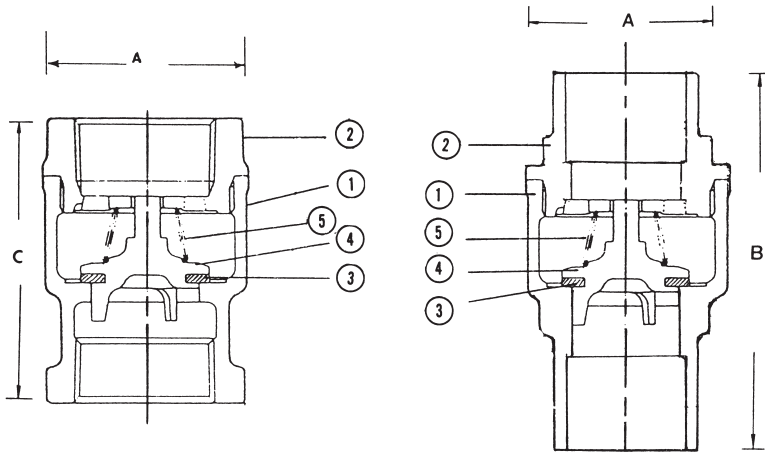

943 Threaded

947 Solder

DIMENSIONS (INCHES)				Approx. Weight 943	Approx. Weight 947
SIZE	A	B	C		
3/8	1-7/8	2-2/32	1-31/32	.43	.43
1/2	1-7/32	2-13/32	2-3/32	.43	.43
3/4	1-1/2	2-13/16	2-5/16	.66	.66
1	1-29/32	3-17/32	2-21/32	1.02	1.02
1-1/4	2-5/32	3-7/8	3-3/32	1.47	1.47
1-1/2	2-19/32	4-7/32	3-5/16	2.20	2.20
2	3-1/8	5-3/32	3-25/32	3.30	3.30

RATING

- 250 PSI NON-SHOCK COLD WATER, OIL OR GAS

FEATURES

- BRONZE BODY
- THREADED OR SOLDER ENDS
- BRONZE SPRING
- BUNA DISC RING
- BRONZE DISC HOLDER
- 100% FACTORY TESTED
- SILENT CLOSING (minimizes water hammer)

MATERIAL SPECIFICATION			
1	Body	Cast Bronze	ASTM B584, C84400
2	Tail Piece	Cast Bronze	ASTM B584, C84400
3	Disc	Buna	
4	Disc Holder	Cast Bronze	ASTM B584, C84400
5	Spring	Bronze	ASTM B103, C52100

The information presented on this sheet is correct at the time of publication. Hammond Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.hammondvalve.com

