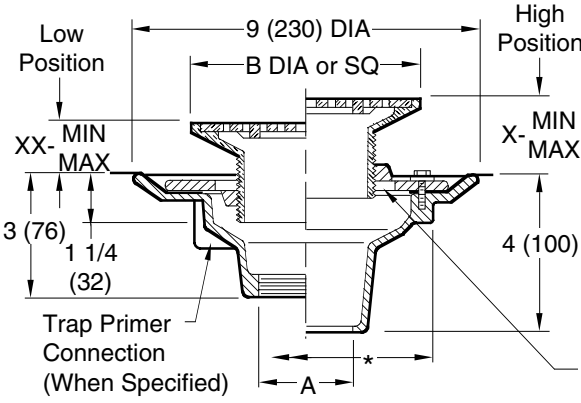
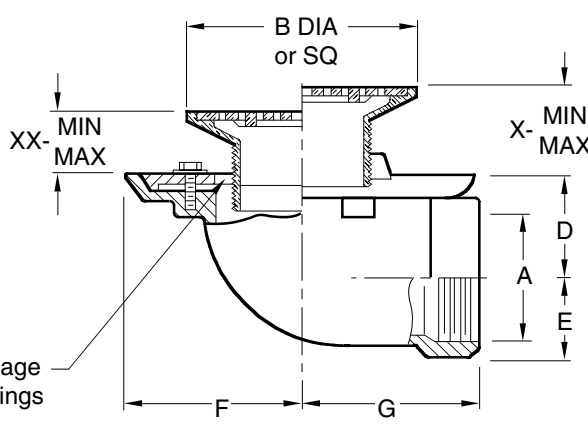


K	 JAY R. SMITH CO. PLUMBING & DRAINAGE PRODUCTS 959 Alness Street, North York, Ontario M3J 2J1 TEL: (416) 736-9610 FAX: (416) 736-3789				LOCATION																																																								
	FLOOR OR SHOWER DRAINS WITH ADJUSTABLE STRAINER HEADS																																																												
	FUNCTION: General service floor drain for use in showers, toilets, kitchens, and other finished areas where foot traffic is expected. The round top strainer head is used for all types of poured finished floors. The square top is particularly adaptable to floors that are finished in material of square or straight line pattern. Reversible flashing collar permits adjustment to meet finished floor level.   CAULK OUTLET ☐ Fig. 2010C (A) ROUND TOP ☐ Fig. 2010C (B) SQUARE TOP THREADED OUTLET ☐ Fig. 2015T (A) ROUND TOP ☐ Fig. 2015T (B) SQUARE TOP																																																												
	<table border="1" style="width:100%; border-collapse: collapse; font-size: 0.8em;"> <tr> <th>Strainer Size</th> <th colspan="2">*Collar In High Position X</th> <th colspan="2">*Collar In Low Position XX</th> <th colspan="2">Free Area SQ IN (SQ CM)</th> </tr> <tr> <th>B DIA or SQ</th> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> <th>ROUND</th> <th>SQUARE</th> </tr> <tr> <td>05 (125)</td> <td>1 1/4 (32)</td> <td>2 1/4 (57)</td> <td>3/4 (19)</td> <td>1 5/8 (41)</td> <td>7 (45)</td> <td>6.5 (42)</td> </tr> <tr> <td>06 (150)</td> <td>1 1/4 (32)</td> <td>2 1/4 (57)</td> <td>3/4 (19)</td> <td>1 5/8 (41)</td> <td>9 (58)</td> <td>12.5 (81)</td> </tr> <tr> <td>07 (180)</td> <td>1 1/4 (32)</td> <td>2 1/4 (57)</td> <td>7/8 (22)</td> <td>1 7/8 (48)</td> <td>14 (90)</td> <td>11 (71)</td> </tr> <tr> <td>08 (205)</td> <td>1 1/2 (38)</td> <td>2 1/2 (64)</td> <td>1 (25)</td> <td>1 7/8 (48)</td> <td>17 (110)</td> <td>14 (90)</td> </tr> <tr> <td>•09 (230)</td> <td>1 1/2 (38)</td> <td>2 3/8 (60)</td> <td>1 (25)</td> <td>1 7/8 (48)</td> <td>18 (116)</td> <td>16 (103)</td> </tr> <tr> <td>•10 (255)</td> <td>1 1/2 (38)</td> <td>2 3/8 (60)</td> <td>1 (25)</td> <td>1 7/8 (48)</td> <td>23 (148)</td> <td>16 (103)</td> </tr> </table>						Strainer Size	*Collar In High Position X		*Collar In Low Position XX		Free Area SQ IN (SQ CM)		B DIA or SQ	MIN	MAX	MIN	MAX	ROUND	SQUARE	05 (125)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	7 (45)	6.5 (42)	06 (150)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	9 (58)	12.5 (81)	07 (180)	1 1/4 (32)	2 1/4 (57)	7/8 (22)	1 7/8 (48)	14 (90)	11 (71)	08 (205)	1 1/2 (38)	2 1/2 (64)	1 (25)	1 7/8 (48)	17 (110)	14 (90)	•09 (230)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	18 (116)	16 (103)	•10 (255)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	23 (148)
Strainer Size	*Collar In High Position X		*Collar In Low Position XX		Free Area SQ IN (SQ CM)																																																								
B DIA or SQ	MIN	MAX	MIN	MAX	ROUND	SQUARE																																																							
05 (125)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	7 (45)	6.5 (42)																																																							
06 (150)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	9 (58)	12.5 (81)																																																							
07 (180)	1 1/4 (32)	2 1/4 (57)	7/8 (22)	1 7/8 (48)	14 (90)	11 (71)																																																							
08 (205)	1 1/2 (38)	2 1/2 (64)	1 (25)	1 7/8 (48)	17 (110)	14 (90)																																																							
•09 (230)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	18 (116)	16 (103)																																																							
•10 (255)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	23 (148)	16 (103)																																																							

•Add 3/8" (10) to all min./max. dimensions for round strainer.

••Not available for 05" (125) size strainer.

*Collar is reversible to obtain extreme high and low strainer positions.

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Collar and Adjustable Strainer Head as Indicated by Suffix Letter Selected.

Meets ASME Standard A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

SEE PM0457 FOR OPTIONAL STRAINER HEADS.

VARIATIONS:

☐ Ball Float Backwater Valve -BFV (Fig. 2015 only)

☐ Flapper Type Backwater Valve -V

☒ Hinged Grate -H

☐ Sediment Bucket -B

☐ Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)

☐ Vandal Proof Screws -U

☐ Wide Flanged Strainer (Specify Fig. DX 2010)

☐ T Threaded Outlet

OPTIONAL MATERIALS:

☐ Bronze Body -BB (Fig. 2010 only)

☐ Chrome Plated Strainer -CP

☐ Galvanized Cast Iron Body -G

☐ Nickel Bronze Strainer -NB

☐ Polished Bronze Strainer -PB

☐ Stainless Steel (Specify Fig. 9700-A) (Fig. 2010 only)