

Ductile Iron Check Valve

Model 80DI



Flomatic Corporation

Sizes 1" / 25 mm

NSF/ANSI 61





LOW-LEAD




NSF/ANSI 372

Materials

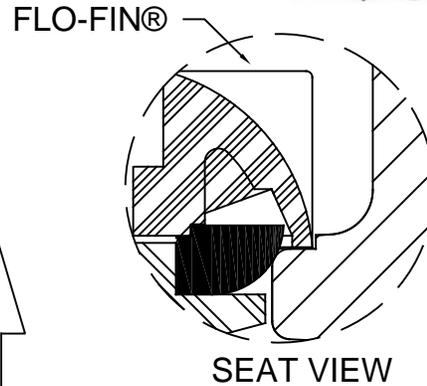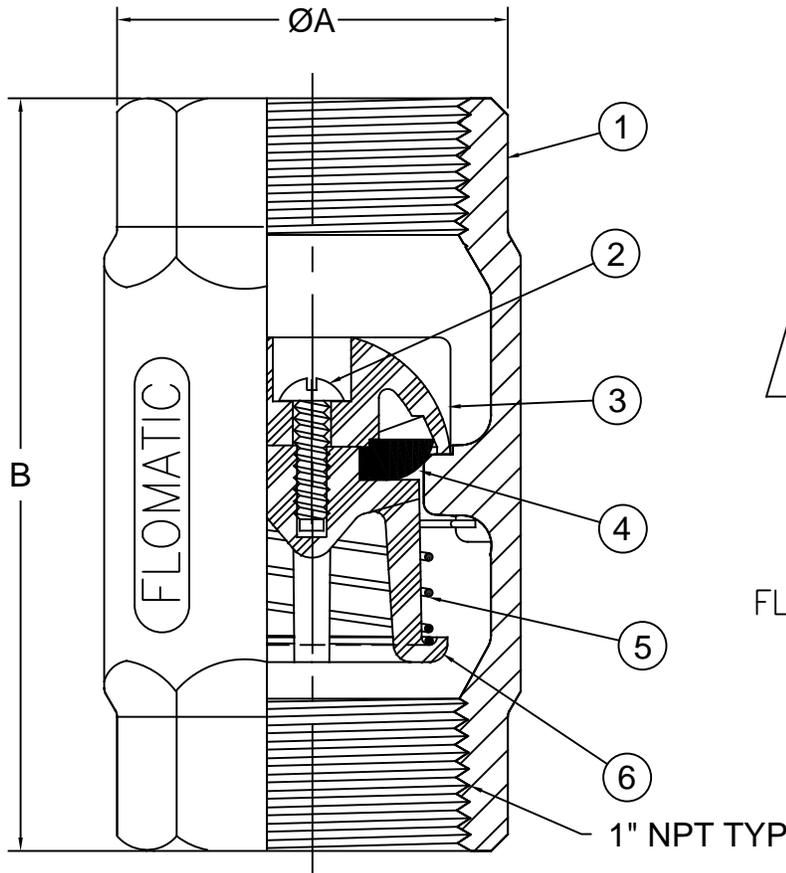

SEAT VIEW



ANTI-SPIN LUG

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Screw	Stainless Steel	302
3	1	Dome (Flo-Fin)	Delrin	500P
4	1	Rubber Disc	Buna-n	N-5007
5	1	Spring	Stainless Steel	302
6	1	Guide	Celcon®	GC 10

Dimensions (FNPT X FNPT)

Max Temp 180°F (82°C)
Max Pressure 400psi (28bar)

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
1	25	4031DI	1-27/32	47	3-37/64	91	1.0	.45

Patent # 4,971,093 & 6,581,633

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



January 25, 2005
Dwg No: S4031di Rev: F (3/18)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798