


# 101B & 202B BRONZE SERVICE SADDLE

## SUBMITTAL INFORMATION

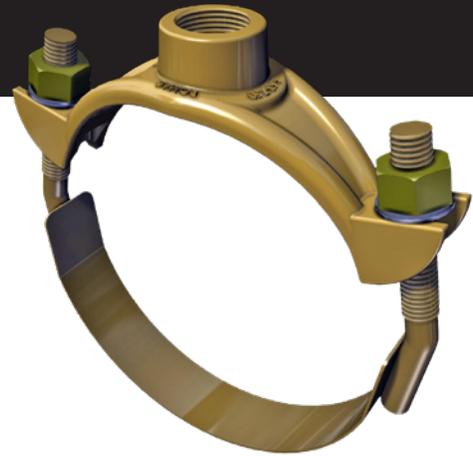

## MATERIALS

### CASTING

The saddle body is cast from 85-5-5-5 waterworks bronze in accordance with AWWA C800 and ASTM B 62. Threads can either be National Pipe Thread (NPT) also referred to as IP threads or AWWA CC threads.

### GASKETS

Gaskets are made from Nitrile Butadiene Rubber (NBR) compounded for water and sewer service and a tolerance of petroleum products in accordance with ASTM D 2000 MBC 610, and NSF 61 Certified Other compounds available for special applications.

### STRAP

Silicon bronze per ASTM B 96, 0.093" thick by 2" wide to spread out clamping forces on the pipe. GMAW welds using silicon bronze filler rod.

### BOLTS

Silicon bronze per ASTM B 98, 5/8-11 National Coarse roll thread.

### NUTS

Heavy Hex silicon bronze per Alloy Number C65100, 5/8-11 National Coarse.

## PRESSURE

When properly installed on a pipe that is within the correct outside diameter range, the Romac Bronze Style service saddles can be used at working pressures up to 200 psi.

## SIZES & RANGES

See Catalog.

08/30/18

Document # 25-8-0004

*This information is based on the best data available at the date printed above. Please check with Romac for any updates or changes.*