

# **Tea-for-Two**® 5.5' Whirlpool Bath **K-856-H2**

#### **Features**

- End drain.
- Integral lumbar support.
- 66" (1676 mm) x 36" (914 mm) x 24" (610 mm)

#### Material

Cast iron with Safeguard® finish.

#### **Hydrotherapy**

- Eight fully adjustable Flexjet<sup>™</sup> hydrotherapy jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.
- Remote control.

#### Installation

Drop-in or under-mount.

#### **Required Accessories**

K- 7147-AF 1-1/2" Contoured Pop-up Drain K- 9698 Flexjet® Whirlpool Trim Kit

#### **Recommended Accessories**

K- 587 Under-mount Installation Kit



#### Codes/Standards

ASME A112.19.1/CSA B45.2 ASME A112.19.7/CSA B45.10 ASTM F462 UL 1795 CSA C22.2 No. 218.2 CARB P2

## **KOHLER® Lifetime Limited Warranty** for Cast Iron Components

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™







### Tea-for-Two®

5.5' Whirlpool Bath K-856-H2

No change in measurements if connected with drain illustrated. (K-7147-AF)

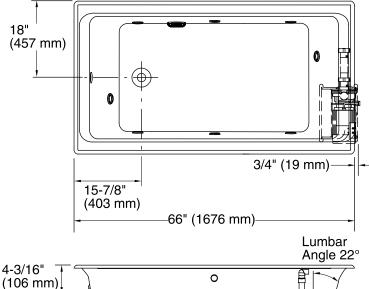

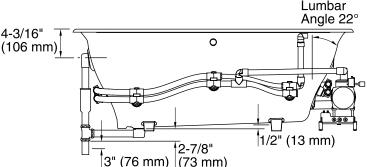

34" (864 mm) x 15" (381 mm)

3/4"
(19 mm) 36" (914 mm)

24"
(610 mm) 1-1/2" Bath Drain

Pump/Control Access

#### **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 240 V, 20 A, 50/60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in, Under-mount

Drain location: End

Basin area, bottom: 45" x 25" (1143 mm x 635 mm) Basin area, top: 58" x 29" (1473 mm x 737 mm)

Weight: 510 lbs (231.3 kg)

Minimum floor load: 86 lbs/ft² (419.9 kg/m²)

Water depth: 19-1/2" (495 mm)

Water capacity: 105 gal (397.5 L)

Cutout: Drop-in, 64-1/2" x 34-1/2" (1638 mm x

876 mm)

Template: Under-mount, K-587, required, not

included

Electrical component Pump: 240 V, 11 A, 1500 W

rating:

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

