


### Features

- Cast iron with Safeguard® finish
- UL listed
- Less all trim
- Drilled for required grip rails
- 6 Flexjets
- N1 models - 2 hp variable speed pump with 1.5 kW heater
- H2 models - 1.5 hp variable speed pump with 1.5 kW heater
- 60" (152.4 cm) x 36" (91.4 cm) x 20-3/8" (51.8 cm)

### BATH WHIRLPOOL K-792-H2 ALSO K-792-N1

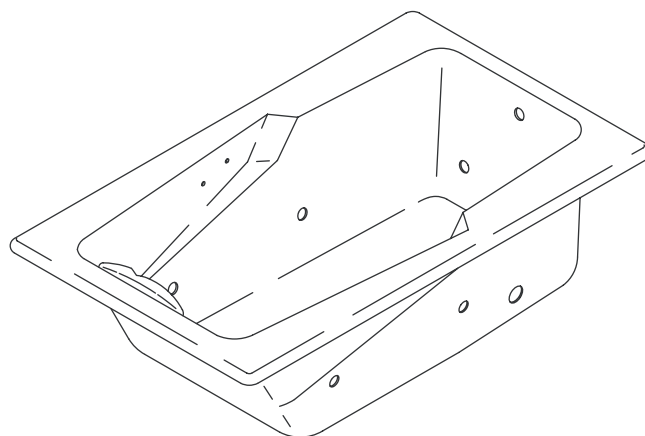

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1
- ASME A112.19.7
- IAPMO/UPC
- Underwriter's Laboratories (UL)

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-792-H2	Bath whirlpool	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-792-N1	Bath whirlpool with neckjets and pillow (shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____

Required Accessories				
K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9623	Grip rails (pair)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Recommended Accessories				
K-7161-TF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories		
K-584	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA
K-1179	Vinyl tiling-in bead (use when the wall material contacts any top surface of the bath)	<input type="checkbox"/> NA

### Product Specification

The bath whirlpool shall be 60" (152.4 cm) in length, 36" (91.4 cm) in width, and 20-3/8" (51.8 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. K-792-N1 bath whirlpool shall have 6 Flexjets, 2 hp variable speed pump, 1.5 kW heater, back-lit user control, and pulsating neckjets with pillow. K-792-H2 bath whirlpool shall have 6 Flexjets, 1.5 hp variable speed pump, 1.5 kW heater, and back-lit user control. Bath whirlpool shall be UL listed. Bath whirlpool shall be less all trim. Bath whirlpool shall be drilled for K-9623 grip rails (required). Bath whirlpool shall be Kohler Model K-792-\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_.

# STEEPING BATH™

## Technical Information

Fixture:*	basin area	top area	weight
Bathing well	43" (109.2 cm) x 19" (48.3 cm)	54" (137.2 cm) x 30" (61 cm)	420 lbs. (190.5 kg)
	water depth	capacity	
To overflow	15" (38.1 cm)	62 gal. (234.7 L)	

\* Approximate measurements for comparison only.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)		
Drop-in cut-out	58-1/2" (148.6 cm) x 34-1/2" (87.6 cm)	
Cut-out for undermount		K-584 template
Minimum access panel:		
Pump/control	34" (86.4 cm) W x 15" (38.1 cm) H	required

Product	Pump	Heater	Voltage	Frequency	Amps
Neckjets	2 hp	1.5 kW	240 V	50/60 Hz	15 A
w/o Neckjets	1.5 hp	1.5 kW	240 V	50/60 Hz	11 A

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control 220-240 V, 20 A, 50/60 Hz


## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 1500 lbs. (680.4 kg) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

**K-792-N1**

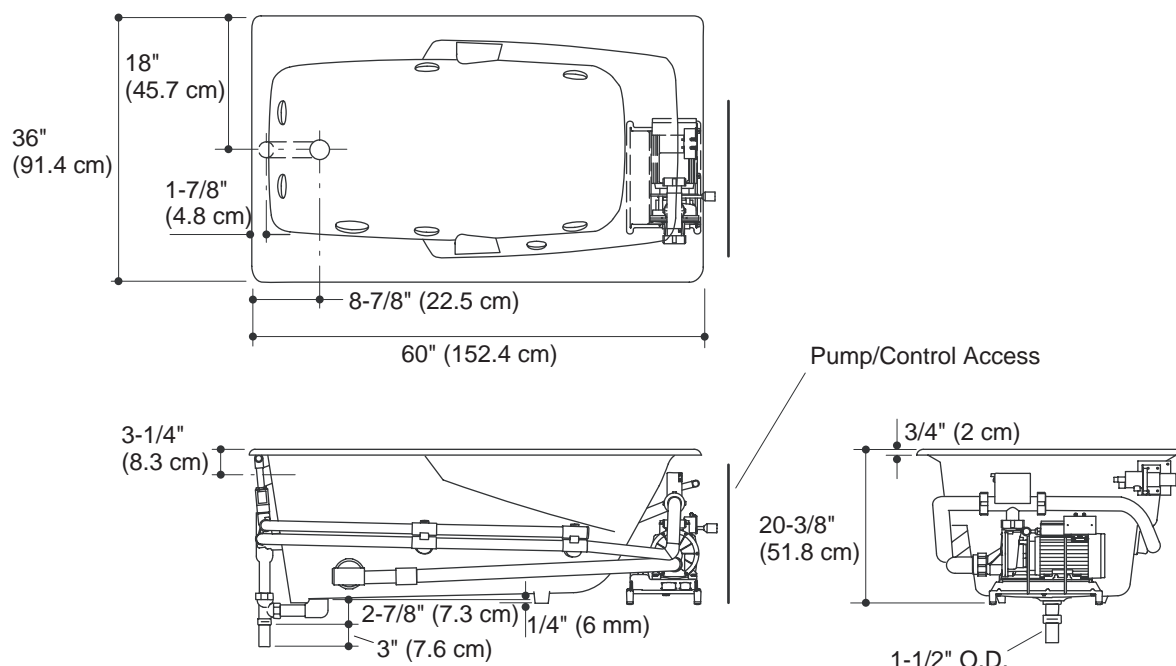

## Product Diagram

STEEPING BATH™ BATH WHIRLPOOL

Page 2 of 2  
1019437-4-B

THE BOLD LOOK  
OF **KOHLER**®