


B446A SWIVEL HANGER (FEMALE ONLY)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN



Part No.	A	R	Wt./C	
			Lbs.	kg
B446A-³/₈	³ / ₈ \"-16 HN	⁹ / ₃₂ \" (7.1)	13	(5.9)
B446A-¹/₂	¹ / ₂ \"-13 HN	³ / ₈ \" (9.5)	15	(6.8)
B446A-⁵/₈	⁵ / ₈ \"-11 HN	¹⁵ / ₃₂ \" (11.9)	34	(15.4)
B446A-³/₄	³ / ₄ \"-10 HN	⁹ / ₁₆ \" (14.3)	45	(20.4)

B446B SWIVEL HANGER (MALE ONLY)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN

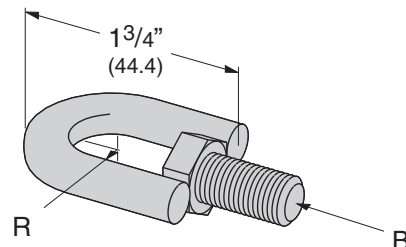

Part No.	B	R	Wt./C	
			Lbs.	kg
B446B-³/₈	³ / ₈ \"-16 HHCS	⁹ / ₃₂ \" (7.1)	16	(7.2)
B446B-¹/₂	¹ / ₂ \"-13 HHCS	³ / ₈ \" (9.5)	20	(9.1)
B446B-⁵/₈	⁵ / ₈ \"-11 HHCS	¹⁵ / ₃₂ \" (11.9)	42	(19.0)
B446B-³/₄	³ / ₄ \"-10 HHCS	⁹ / ₁₆ \" (14.3)	60	(27.2)

B446C SWIVEL HANGER (FEMALE-FEMALE)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN

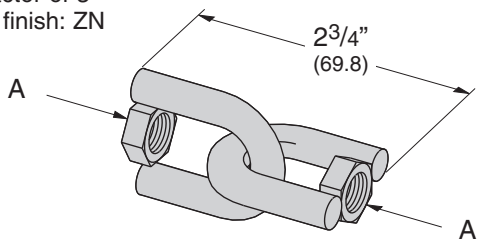

Part No.	A	Wt./C	
		Lbs.	kg
B446C-³/₈	³ / ₈ \"-16 HN	26	(11.8)
B446C-¹/₂	¹ / ₂ \"-13 HN	31	(14.0)
B446C-⁵/₈	⁵ / ₈ \"-11 HN	68	(30.8)
B446C-³/₄	³ / ₄ \"-10 HN	90	(40.8)

B446 SWIVEL HANGER (FEMALE-MALE)

- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN

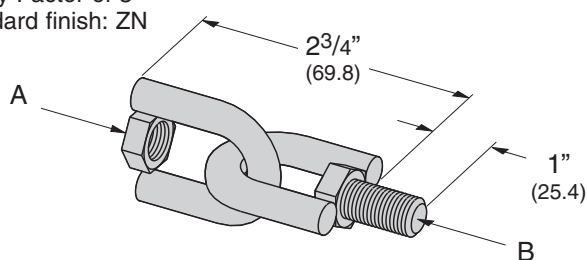

Part No.	A	B	Wt./C	
			Lbs.	kg
B446-³/₈	³ / ₈ \"-16 HN	³ / ₈ \"-16 HHCS	28	(12.7)
B446-¹/₂	¹ / ₂ \"-13 HN	¹ / ₂ \"-13 HHCS	36	(16.3)
B446-⁵/₈	⁵ / ₈ \"-11 HN	⁵ / ₈ \"-11 HHCS	78	(35.4)
B446-³/₄	³ / ₄ \"-10 HN	³ / ₄ \"-10 HHCS	112	(50.8)

Reference page 44 for general fitting and standard finish specifications.

B617 SHOULDER BOLT

- Standard finish: ZN
- Wt./C 6 Lbs. (2.7 kg)

3/8"-16 Thread Size





Fig. 75 SWIVEL ATTACHMENT

- Standard finish: ZN
- Sized for 3/8"-16 threaded rods
- UL Listed to support up to 4" Pipe per NFPA 13
- Wt./C 13 Lbs. (5.9 kg)



HN HEX NUTS


- Standard finish: Zinc-Plated, Stainless Steel



Part No.	Wt./C	
	Lbs.	kg
1/4" HN	.7	(.32)
5/16" HN	1.0	(.45)
3/8" HN	1.5	(.68)
1/2" HN	3.6	(1.63)
5/8" HN	7.2	(3.26)
3/4" HN	11.1	(5.03)
7/8" HN	17.9	(8.12)
1" HN	27.2	(12.34)

MSQN MACHINE SQUARE NUT


- For use with B755 Beam Clamp
- Standard finish: Zinc-Plated



Part No.	Wt./C	
	Lbs.	kg
MSQN 1/4"	.6	(.27)
MSQN 5/16"	1.2	(.54)
MSQN 3/8"	1.8	(.81)

SQN SQUARE NUTS

- Standard finish: Zinc-Plated



Part No.	Wt./C	
	Lbs.	kg
1/2" SQN	5.7	(2.58)
5/8" SQN	10.1	(4.58)

Reference page 44 for general fitting and standard finish specifications.