

## CERTIFIED LEAD FREE 800SB Deluxe Frost-Proof Yard Hydrant



- 3/4" NPT Female Inlet.
- 3/4" Male Hose Thread Outlet.
- Cast Iron head and handle.
- Galvanized pipe.
- Stainless steel extension rod.
- Aluminum hose adapter.
- Polyester powder coated finish.
- Maximum Pressure 120 PSI.
- Individually Boxed.
- Yard Hydrant Lengths...Page 50.
- Yard Hydrant Flow Rates: Page 24.
- Yard Hydrant accessories: Page 37 and 46.




MADE IN U.S.A. WITH U.S. AND IMPORTED COMPONENTS

Certified by Truesdail Laboratories. Meets all Federal and State Safe Drinking Water Acts and requirements, including California Prop. 65 (Environmental Law).

Part No.	Bury Depth	Weight Each lbs.
800SB	1	12.1
801SB	1 1/2	13.5
802SB	2	14.5
803SB	3	16.5
804SB	4	19.2
805SB	5	21.2
806SB	6	22.8
807SB	7	25.9
808SB	8	28.3



**SIMMONS  
SUPERIOR  
PACKAGING**

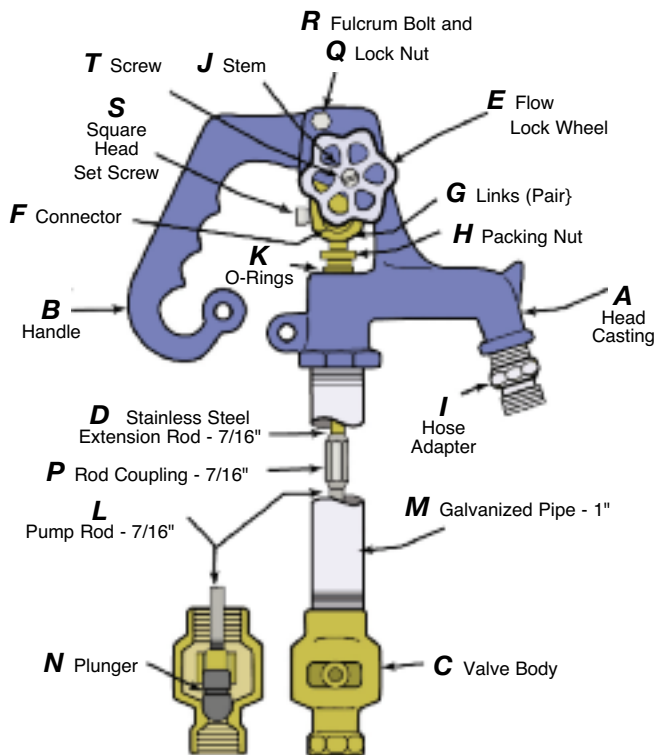

### CERTIFIED LEAD FREE 800SB Series Yard Hydrant Parts

Ref.	Part No.	Name of Part
	850SB	Parts Kit
	840SB	Head Complete
<b>A</b>	8820	Head
<b>B</b>	8821	Handle
<b>C</b>	8822SB	Valve Body
<b>D</b>	8843	Stainless Steel Extension Rod 7/16"
<b>E</b>	8824*	Flow Lock Wheel
<b>F</b>	8825*	Brass Connector
<b>G</b>	8826*	Brass Links, Pair
<b>H</b>	8847*	Brass Packing Nut
<b>I</b>	8844	Aluminum Hose Adapter
<b>J</b>	8829*	Brass Stem, Square Head
<b>K</b>	8839*	Buna-N "O" Rings, Pair
<b>L</b>	8814	Pump Rod, 7/16"
<b>M</b>	8815	Galvanized Pipe Casing, 1"
<b>N</b>	8842*	Plunger (One Piece)
<b>P</b>	8834	Rod Coupling, 7/16"
<b>Q</b>	8301*	Stainless Steel Lock Nut
<b>R</b>	8836*	Fulcrum Bolt Stainless Steel
<b>S</b>	8837*	Set Screw (Square Head S.S.)
<b>T</b>	8610*	Screw for Flow Lock Wheel

**Parts  
Kit...**



\* Included in Parts Kit.

\* These parts make up the flow lock wheel assembly.