


AUTOMATIC THERMAL PROTECTOR


#16 GREEN GROUND LEAD TO BE  $12.000 \pm .250$  BETWEEN CENTERS OF TERMS. TERM. TO FIT #10 SCREW

4 EXTRA SERRATED NUTS  
 (4) 8-18 SCREWS SUPPLIED IN MOTOR SHELL HOLES 90° APART

ROTATION IS C.W. VIEWING LEAD END WITH ORG TO ORG & YEL TO YEL TO REVERSE INTERCHANGE ORG & YEL LEADS.

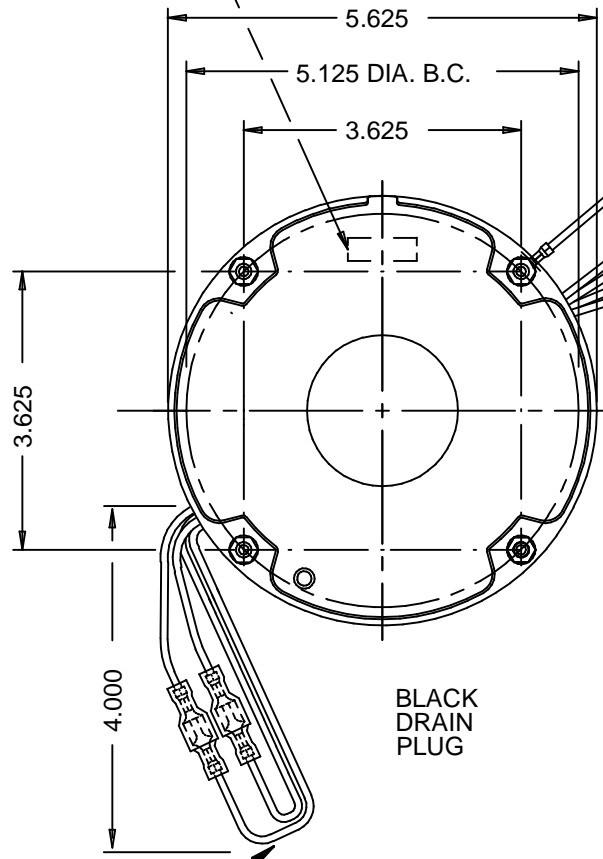

8-32 UNC THREAD

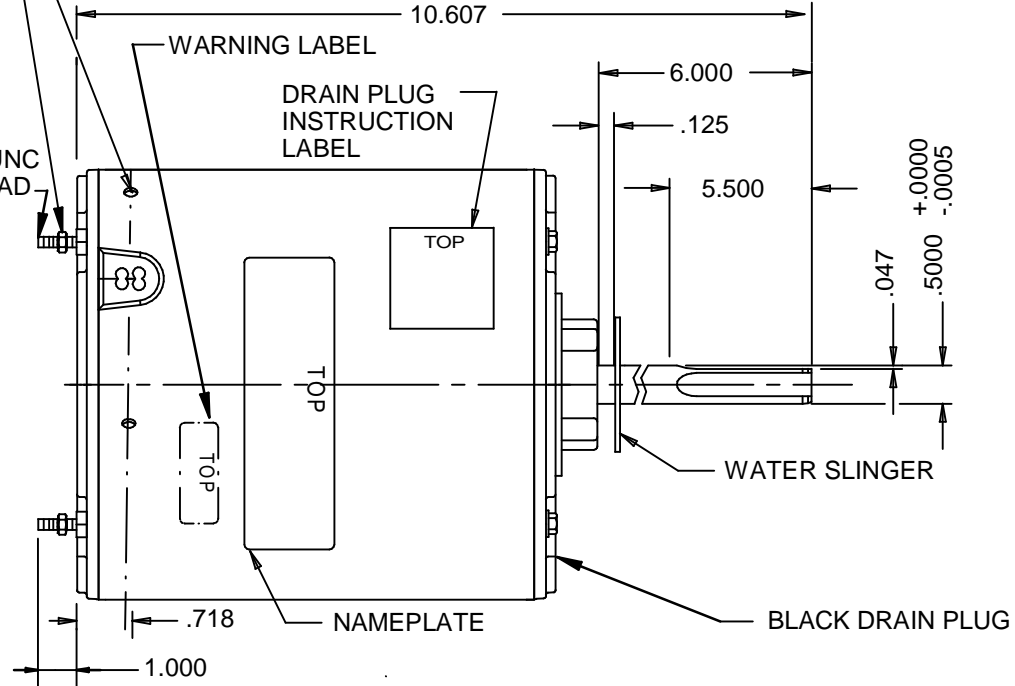

WARNING LABEL

DRAIN PLUG INSTRUCTION LABEL

TOP

TOP

TOP

NAMEPLATE

WATER SLINGER

BLACK DRAIN PLUG


(2) .250 STRAIGHT TYPE Q.C. TERMS WITH INSUL. GRIP ON BROWN LEADS.

(2) LEADS SKINNED  $.750 \pm .062$

4 LEADS, #18, .062 THICK INSUL. TO EXTEND BEYOND MOTOR  
 BLACK= $30.000 +2-0$ , WHITE= $30.000 +2-0$ , BROWN= $30.000 +2-0$ , BRN/WHT STRIPE= $30.000 +2-0$ .

(4) LEADS, #18, .031 THICK INSUL.  
 (2) YELLOW & (2) ORANGE FOR REVERSING ROTATION

TOTALLY ENCLOSED

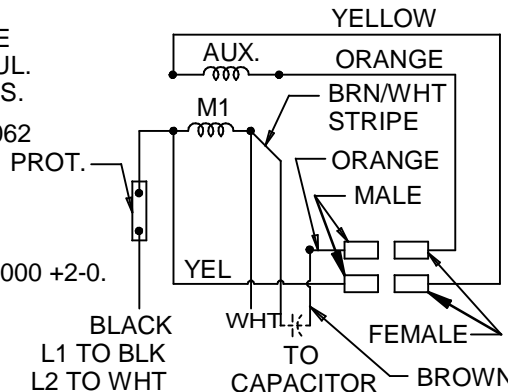

BLACK L1 TO BLK  
 L2 TO WHT

WHT TO CAPACITOR  
 FEMALE  
 BROWN

CAT. NO.  
 1873

© EMERSON ELECTRIC CO. 6/4/2009

MODEL	REF.	CUSTOMER	HP.	VOLTS	AMPS	HZ.	R.P.M.	ROTATION	CUST. PT. NO.
K55HXSRC-4514		STANDARD	1/6	208-230	1.0	60	825	C.W. LD. END REV.	

SHEET NUMBER	REV	REVISION RECORD FOR:	ECO 240260
1 OF 1	C	ADDED 4 EXTRA SERRATED NUTS.	
REVISION DATE			
04-JUN-09			

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF EMERSON ELECTRIC COMPANY.



ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN.

ISSUED BY	REVIEWED BY	ENGINEER APPROVED	TITLE	CODE	ITEM NO.	SIZE
J. CORONADO	A. SEGOVIA	T. BOURQUIN	ASSEMBLED VIEW	V01	277565	A