



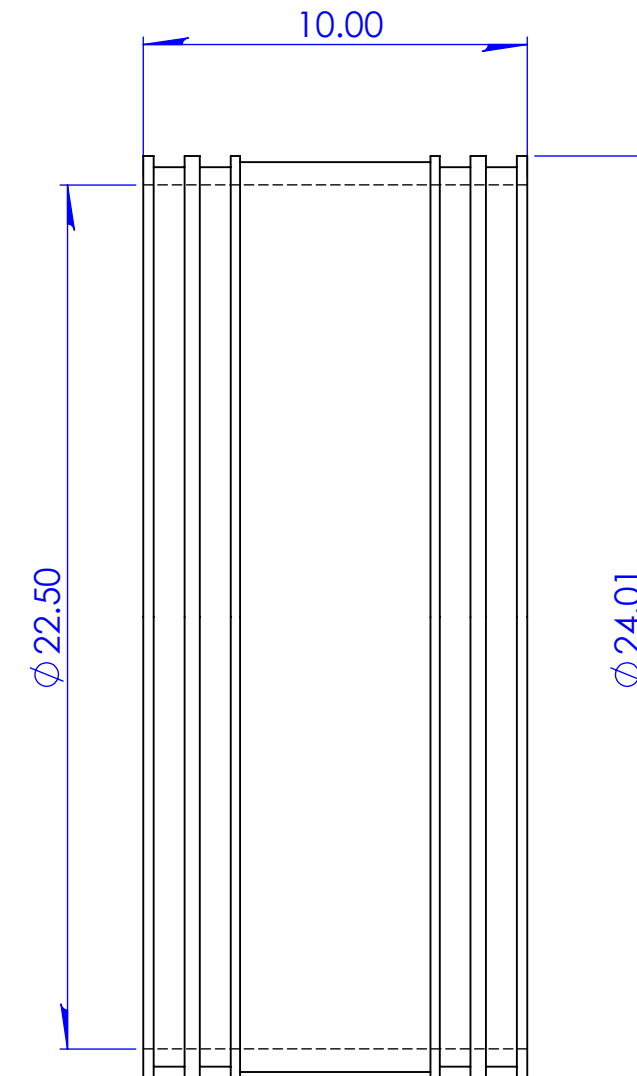

300 S. DAYTON ST.
DAVISON, MI 48423
PH: 810-653-9626
FAX:810-654-2616

1004-1818

DESCRIPTION: Coupling 18" Concrete to 18"
Concrete Shear Ring

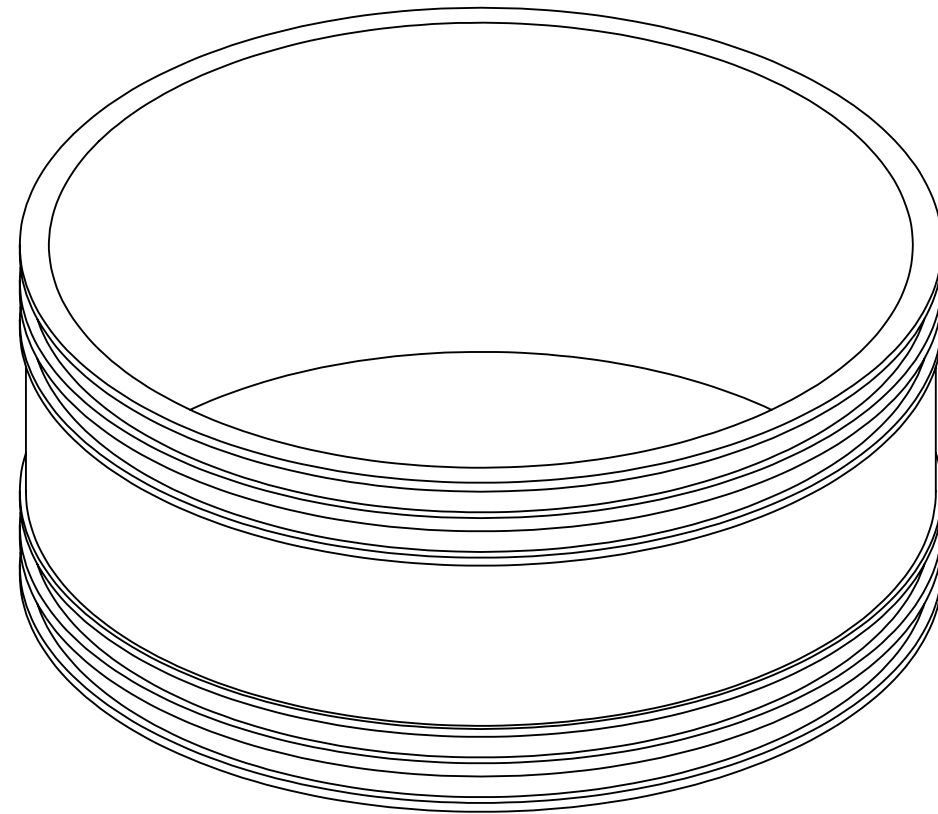

Note

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FERNCO, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FERNCO, INC.
IS PROHIBITED.

TOLERANCES:
Fractional $\pm 1/4"$
.XX = $\pm .06$
ANG. = $\pm 3^\circ$
UNLESS OTHERWISE SPECIFIED

Part Weight		Installation Torque	120 in lbs	UNITS: INCHES	SIZE: A	DESIGNER: N. Goddard		SCALE:
Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926, C1173					not to scale
Pressure Tested		Clamps used	300 Series Stainless	3RD ANGLE PROJECTION DO NOT SCALE DRAWING		CHECKER:	DATE:	SHEET 1 OF 1
Material	Flexible PVC 60 Duro Shore A	Box Quantity					1/18/2016	