


AQUAFLO®

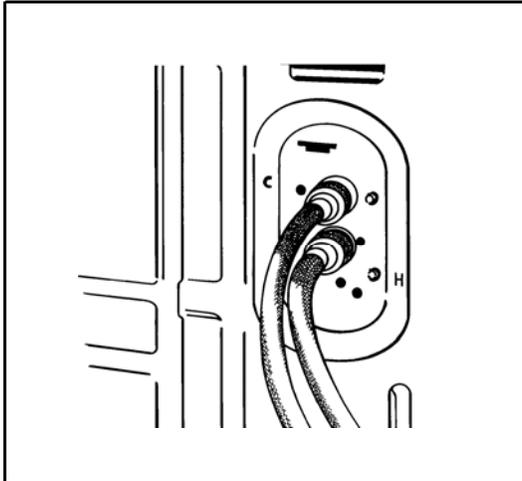

DESIGN FEATURES

- Chloramine resistant washers
- Exclusive POWR-TIGHT 12-point crimp-many times industry standard
- Chloramine resistant tubing
- Withstands dramatic changes in water pressure
- Easy installation, no special tools required.

COMPLIANCES/LISTINGS

- IAPMO Certified
- ASME A112.18.6

MATERIAL SPECIFICATIONS

- Working Pressure: 160 psi
- Operating Temperature: 33° F - 140° F
- Tubing: UltraCore
- Nuts & End Fittings: Brass
- Washers: NSF 61 Compliant



3689 Arrowhead Drive, Carson City, NV 89706
 Phone (800) 854-3215 Fax (800) 243-1777
 E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

AF/S-2003 (04-08) Rev 3

ULTRACORE WASHING MACHINE CONNECTOR Specification Sheet

1/2" ID for Front Load Washers

Part Number	Description	Length
WAS-148-PP	3/4" FGHT	48"
WAS-160-PP	X	60"
WAS-172-PP	3/4" FGHT	72"

3/8" ID for Top Load Washers

Part Number	Description	Length
WAS-348-PP	3/4" FGHT	48"
WAS-360-PP	X	60"
WAS-372-PP	3/4" FGHT	72"

Product Submittal

Job Name	
Date	
Part Number	Quantity
Architect	
Contractor	