

### Features

- Intended for use with Rite-Temp® or HiFlow Rite-Temp® valves.
- Sculpted lever handle.

### Material

- Premium material construction for durability and reliability.

### Required Products/Accessories

K-304/K-P304 Series Rite-Temp® Valves

or

K-2971-KS 3/4" Pressure-balancing Valve

### Recommended Products/Accessories

88526 Thin Wall Trim Kit

K-23723 Faucet cleaner

### Optional Products/Accessories

GP1025388 Deep Roughing-in Kit for Forte® and Bancroft®



### Codes/Standards

ASME A112.18.1/CSA B125.1


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	PB	Vibrant® Polished Brass
	BV	Vibrant® Brushed Bronze

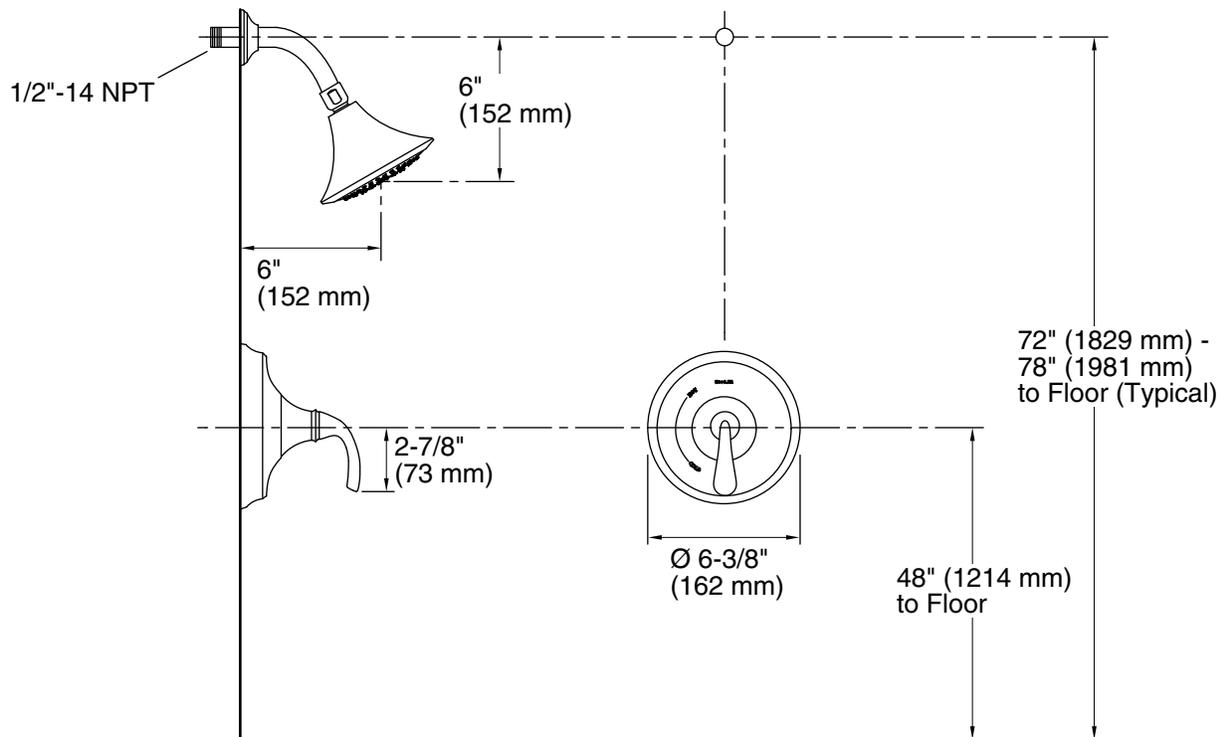

**Technical Information**

All product dimensions are nominal.

**Showerhead/Body Spray:**

Rated maximum flow: 2.5 gal/min (9.5 l/min)

**Notes**

**NOTICE:** Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed. Install this product according to the installation guide.

Install Rite-Temp valve according to valve installation guide.

Avoid cross-flow conditions. Do not install a shut-off device on either valve outlet.

Cap the shower outlet if the deck-mounted spout, diverter, or handshower is connected to the spout outlet.

If installing a K-304 valve, install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.