


PART NUMBER	SIZE	"R"	"D"	"H"	"S" MIN	"B" MIN	"L"
XXXXXXX	½"	24"	7"	17"	1 ½"	1¼"	18 ⅞"
XXXXXXX	¾"	24"	7"	17"	1 ½"	¾"	18 ⅞"
5233878	1"	24"	7"	17"	1 ⅞"	⅞"	18 ⅞"
5233941	1 ¼"	24"	7"	17"	2"	1"	18 ⅞"
5233874	1 ½"	24"	7"	17"	2"	1 ⅛"	18 ⅞"
5233815	2"	24"	7"	17"	2"	1 ⅛"	18 ⅞"
5233935	2 ½"	24"	7"	17"	3"	1 ½"	18 ⅞"
5233800	3"	24"	7"	17"	3 ⅛"	1 ⅝"	18 ⅞"
5233802	3 ½"	24"	7"	17"	3 ¼"	1 1¼"	18 ⅞"
5233812	4"	24"	7"	17"	3 ⅜"	1 ¾"	18 ⅞"
XXXXXXX	5"	N/A	N/A	N/A	3 ⅝"	2"	N/A
XXXXXXX	6"	N/A	N/A	N/A	3 ¾"	2 ⅛"	N/A
XXXXXXX	8"	N/A	N/A	N/A	6 ⅝"	4 ⅞"	N/A



UL Listed UL651
 UL File # E34052
 UL Category Code DZYR
 UL Control Number 41UM
 Meets NEMA TC3
 See NEC Article 352 for use
 Material is Rigid PVC
 Bend Tolerance is $\pm 2^\circ$

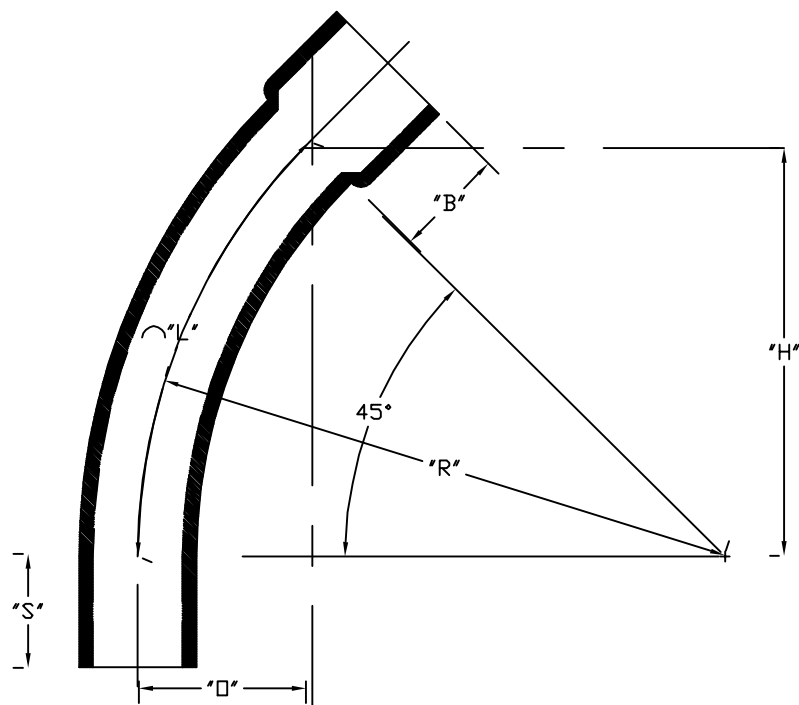

CANTEX

INC.
Fort Worth, TEXAS

**45° Elbows Bell End
Schedule 40 24" Radius Elbows**

Drawn By: CD Branch

Date:10/15/07

Ref.