


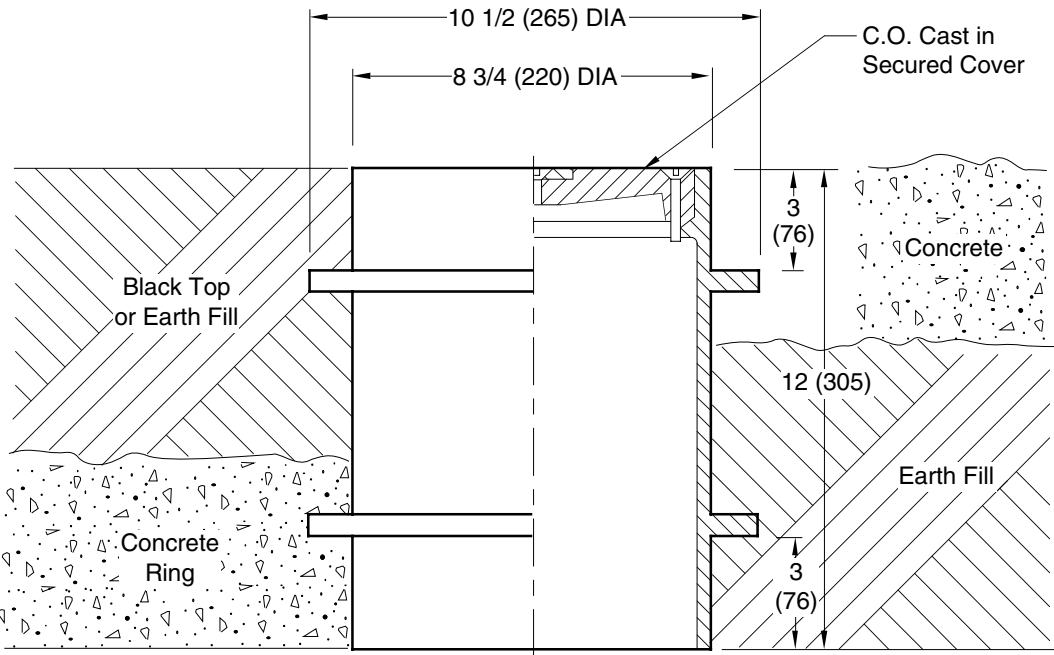


B	<div>SMITH® JAY R. SMITH MFG. CO.® DIVISION OF SMITH INDUSTRIES, INC. POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com</div> <div></div> <div>LOCATION</div>			
DRAWING NUMBER S4880				
SIZE	A			
SCALE:	NONE			
DATE:	2-10-86			
APPROVED BY:	JD			
CHECKED BY:	CR			
DRAWN BY:	CM			
FIGURE NUMBER	4880			
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA				
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE				
<div><h1>FLOOR ACCESS COVERS</h1><h2>ROUND FLANGED HOUSING WITH HEAVY DUTY CAST IRON COVER</h2><p>FUNCTION: Used to cover cleanouts, valves, cocks, etc. High anchor flange permits use in areas surfaced with concrete or other poured materials. Low anchor flange is used with a ring of concrete poured below the surface for non-surfaced areas and areas surfaced with asphalt paving. Housing is completely free of piping so that no loading is transmitted to the pipe.</p><p>Fig. 4880</p><div><div>REGULARLY FURNISHED: Duco Cast Iron Double Flanged Body with Heavy duty Secured Scoriated Cast Iron Cover with Lifting Device.</div><div>VARIATIONS: <input type="checkbox"/> Vandal Proof Screws -U <input type="checkbox"/> Cover Cast with Words "Gas Shut-Off -GSO or "Water Shut-Off -WSO</div><div>OPTIONAL MATERIALS: <input type="checkbox"/> Galvanized -G</div></div><p>NOTE: Dimensions shown in parentheses are in millimeters.</p></div>				
REV.	DATE	DESCRIPTION	BY	CKD. BY
B A	1-23-96 1-11-95	Added Millimeters Submittal Update	EMB EMB	BS BS
WEIGHT POUNDS		VOLUME CUBIC FEET		FIGURE NUMBER 4880