

Fig. 906 – TOLCO sway brace multi-fastener adapter

Function: To attach sway bracing to various types of concrete and wood structural members. The Fig. 906 is the structural attachment component of a longitudinal or lateral sway brace assembly. It is intended to be combined with a TOLCO™ transitional attachment, "bracing pipe" sized in accordance with the transitional attachment instruction sheet, and a TOLCO "braced pipe" attachment to form a complete bracing assembly. Sway brace assemblies are intended to be installed in accordance with NFPA 13 and the manufacturer's installation instructions.

Part Number	Α	В	Maximum UL rated load
Fig. 906	9	12	1200 lbs.
Fig. 906-12	12	15	1200 lbs.



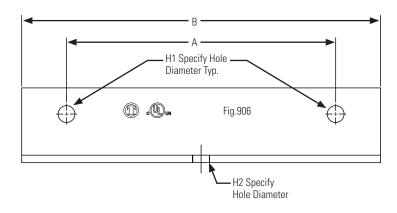

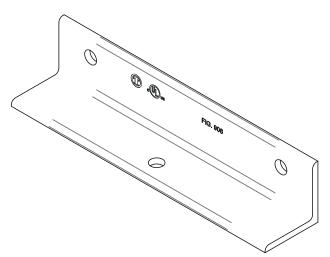

Installation Instructions: Select an anchor that is sized appropriately for the intended use and follow anchor manufacturer's instructions regarding structural thickness and embedment requirements. The required type, number and size of fasteners used for the structure attachment fitting shall be in accordance with NFPA 13. Mark H1 hole pattern onto structure. Drill holes for anchorage that are \$\frac{1}{16}\$" larger than the diameter of the anchor selected. Anchor Fig. 906 per NFPA 13 /OSHPD/ and the selected anchors guidelines, using H1 holes. Once Fig. 906 is secured to structure, secure a TOLCO swivel attachment (Fig. 909, 910, 975, 980 or *986) to hole H2.

*Not UL listed when used in combination with Fig. 986



Eaton

1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

13201 Dahlia Street, Suite 200 Fontana, CA 92337 United States Phone: 800-851-7415

© 2020 Eaton All Rights Reserved Printed in USA Publication No. IL309008EN September 2020 B-Line Division Eaton.com/tolco Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information







