



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com



## 86000 Series ABS Sediment Drains



### SUBMITTAL SPECIFICATION

**Engineering Specification:** Commercial grade multipurpose drain for effective effluent removal in any application. removable sediment bucket will keep drain lines free of all debris. Available with cast iron and PVC grate assemblies.

Job Reference

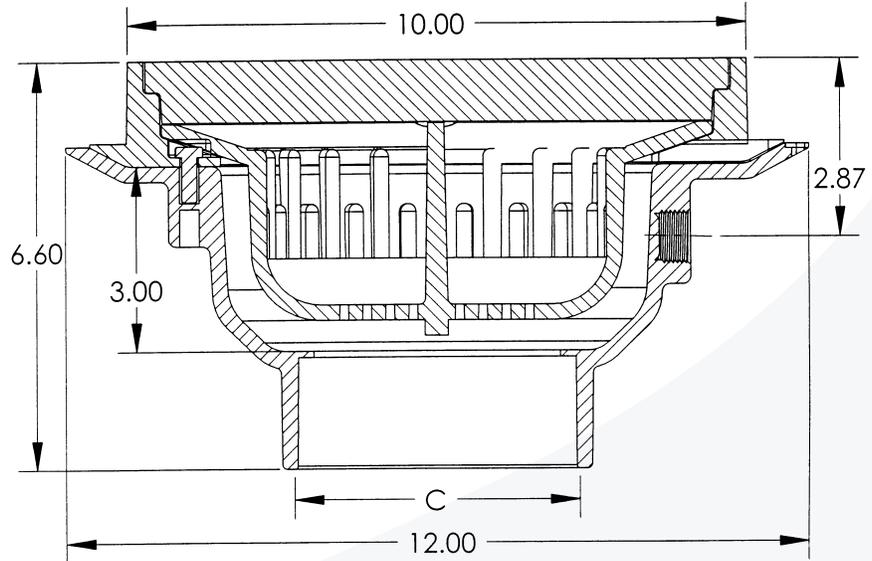

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Grate Material	Sediment Bucket	Part Number
	2 in.*	ABS	Plastic	With	86012
	2 in.*	ABS	Plastic	Without	86022
	2 in.*	ABS	Cast Iron	With	86032
	2 in.*	ABS	Cast Iron	Without	86042
	3 in.	ABS	Plastic	With	86013
	3 in.	ABS	Plastic	Without	86023
	3 in.	ABS	Cast Iron	With	86033
	3 in.	ABS	Cast Iron	Without	86043
	4 in.	ABS	Plastic	With	86014
	4 in.	ABS	Plastic	Without	86024
	4 in.	ABS	Cast Iron	With	86034
	4 in.	ABS	Cast Iron	Without	86044
	6 in.	ABS	Plastic	With	86016
	6 in.	ABS	Plastic	Without	86026
	6 in.	ABS	Cast Iron	With	86036
	6 in.	ABS	Cast Iron	Without	86046

\*2 in. base includes 3 in. x 2 in. bushing.

Grate Properties		
Finish	Open Area	Load*
Plastic	32.50 in. <sup>2</sup>	Light
Cast Iron	32.50 in. <sup>2</sup>	Medium

\*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.