


# Specifications

Model No.	HI-3000 (Regular)	4000 (w/Heater)	HI-3001 (Elongated)	4001 (w/Heater)
Power Supply		AC120V, 60Hz		
Power Consumption		550 W		
Power Cord Length		4 ft. (1.2M)		
WATER FEATURE	Warm Water Tank	0.26 gal.		
	Water Temperature	Adjustable in 4 steps; Room Temp./95°F(37.5°C)/104°F(4°C)		
	Safety Devices	Thermo cut/off switch, float equipped w/stop valve & vacuum switch breaker		
HEATED SEAT	Water Flow	Adjustable in 5 steps; Approx. 0.13 - 0.27 gal./min.		
	Surface	Adjustable in 4 steps; Room Temp./93.2°F(34°C)/99.5°F(37.5°C)/104°F(40°C)		
	Power Consumption	55W		
Dimensions	Safety Devices	Built-in thermal cutoff		
	Water Supply Pressure	10 psi - 100 psi		
	Safety Devices	Ground fault detection circuit breaker, Seat switch		
	Dimensions	20-3/4" W x 18-3/4" D x 8-1/2" H (5.270mm x 476.3mm x 209.6mm)	20-3/4" W x 20-3/4" D x 8-1/2" H (527.0mm x 527.0mm x 209.6mm)	
Weight	13.2 lbs.		13.6 lbs.	

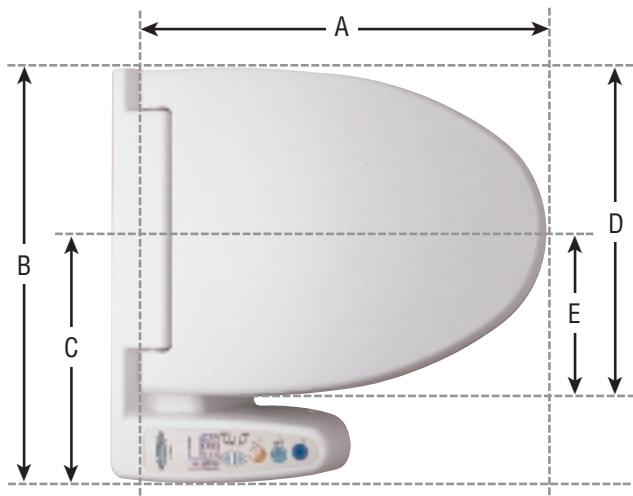

Model No.	HI-3000 (Regular)	HI-4000	HI-3001 (Elongated)	HI-4001
A	17-1/2"		18-1/2"	
B		19-5/8"		
C		11-3/4"		
D		15-1/2"		
E		8-5/8"		

**CAUTION:**

1. The operational range of water pressure required for this appliance is 10 psi to 100 psi. Although this appliance can operate below a supplied water pressure of 10 psi, the user adjustable shower force range will be affected.
2. Do not turn on power and water to this appliance until the installation is completed.

(Specifications are subject to change without notice)

## WHITE

REGULAR – HI-3000  
ELONGATED – HI-4000

## BISCUIT

REGULAR – HI-3001  
ELONGATED – HI-4001

Distributed by:



**Hometech Industries, Inc.**  
21088 Bake Parkway, Suite 106, Lake Forest, CA 92630  
Tel: (949) 457-2378 • (888) 557-6888 • Fax: (949) 768-8789  
www.hometechind.com • Email: info@hometechind.com

