

**5 1/4" AMERICAN-DARLING® B-62-B-5 FIRE HYDRANT
BY AMERICAN FLOW CONTROL®**



**AMERICAN
FLOW CONTROL**

THE RIGHT WAY



AMERICAN

FLOW CONTROL

THE RIGHT WAY

CONSTRUCTION

Fully complies with ANSI/AWWA C502 and is available
UL Listed and FM Approved in applicable configurations.

ONE-PIECE BRONZE OPERATING NUT

Has a removable pipe plug to allow
lubrication of operating threads.

TOP TRAVEL STOP NUT

Provides a positive limit to main
rod travel. Eliminates contact of
valve bottom with interior of base,
thereby protecting coating.

HYDRANT ROD

Furnished in two sections of
high-tensile steel. Upper section
has bronze sleeve where it passes
through housing O-rings. Upper
and lower sections are connected
by gray iron coupling using
stainless steel pins.

EPOXY PRIMER AND POLYURETHANE COATING SYSTEM

Upper barrel is provided with an E-coat
primer and a two-part polyurethane top
coat for improved durability, color and
gloss retention.

STAINLESS STEEL HYDRANT SPRING

Assures quick drain closure
and allows throttling.

DRAIN LEVER

Rugged bronze lever performs dual
function as carrier for drain lever pads
and as wrench to remove working parts.

BASE BOLTS AND NUTS


Hydrant is provided with
stainless steel fasteners
below grade.

HYDRANT SEAT

Seat is constructed of
bronze. Design includes
a near-vertical machined
seating surface with two
drain ports.

HYDRANT VALVE

Consists of an epoxy-coated iron valve
top and bottom. Hydrant valve rubber
constructed of EPDM rubber. Valve has
a near-vertical seat taper to minimize
entrapment of debris while sealing
against an all-bronze hydrant seat.
Spherical design provides minimal
flow loss.

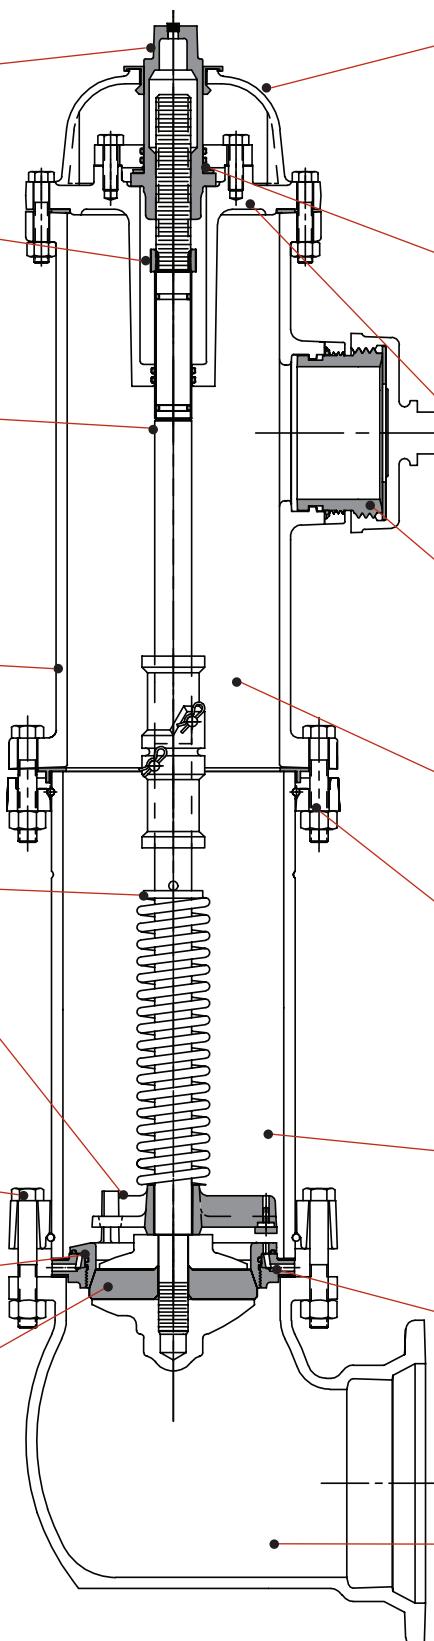

WEATHER COVER

The word "OPEN" and an arrow show
direction to turn the operating nut. The
rubber weather shield helps prevent water
and debris from entering the housing
area.

THRUST WASHER

Takes upward thrust when opening
hydrant valve and reduces operating
torque.

HOUSING AND HOUSING COVER

Retain operating nut and thrust washer.
Rugged construction helps withstand
operating forces.

NOZZLES

Patented design allows field replacement
of damaged nozzles in minutes by one
person. Uses no pins or set screws that
can become dislodged or lost.

UPPER BARREL

Ductile iron with markings identifying size,
model and year of manufacture.

TRAFFIC FEATURE

Upper barrel is connected to lower barrel
with breakable traffic flange and eight
bolts and nuts. This feature allows 360°
rotation of upper nozzle section.

LOWER BARREL

The ductile iron lower barrel provides
extra strength against traffic impact
damage.


HYDRANT DRAIN SYSTEM

Drain ring is securely held between
barrel and base flange, provides
bronze-to-bronze threaded connection
for hydrant seat. Hydrant is equipped
with four drain outlets.

BASE

Spherical-shaped base has
no projections or cavities to
obstruct flow. Base is epoxy-
coated ductile iron.

EXPLODED DRAWINGS

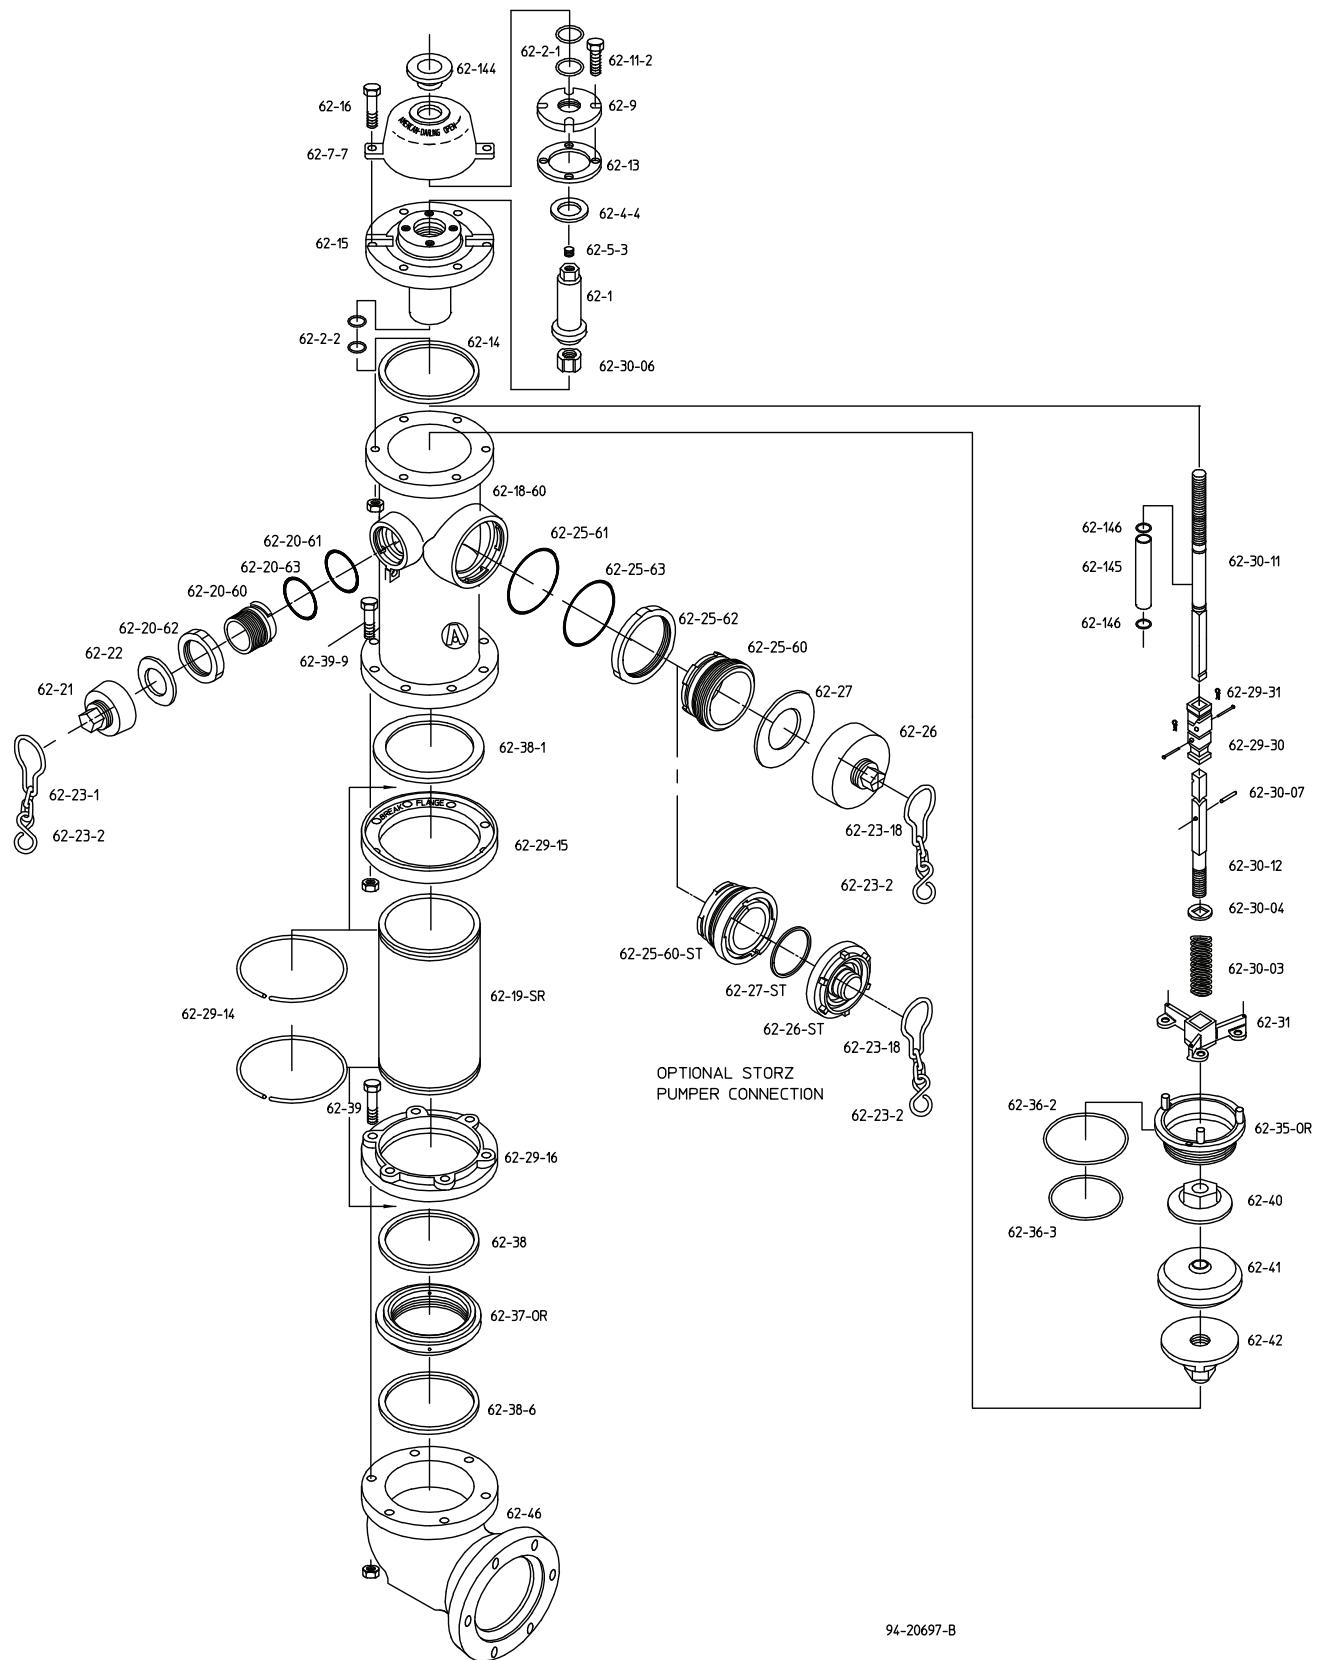

PARTS LIST

REF NO.	QTY.	DESCRIPTION	MATERIAL
62-1	1	Operating Nut	Bronze
62-2-1	2	Cover O-ring	Buna-N
62-2-2	2	Housing O-ring	Buna-N
62-4-4	1	Thrust Washer	Nylatron
62-5-3	1	Pipe Plug	Stainless Steel
62-7-7	1	Weather Cover	Gray Iron
62-9	1	Housing Cover	Gray Iron
62-11-2	4	Housing Cover Cap Screw	Plated Steel
62-13	1	Housing Cover Gasket	Fiber
62-14	1	Housing Gasket	Rubber
62-15	1	Housing	Ductile Iron
62-16	6	Housing Bolt and Nut	Plated Steel
62-18-60	1	Upper Barrel	Ductile Iron
62-19-SR	1	Lower Barrel	Ductile Iron
62-20-60	2	Hose Nozzle	Bronze
62-20-61	2	Hose Nozzle Seal	Buna-N
62-20-62	2	Hose Nozzle Retainer	Ductile Iron
62-20-63	2	Hose Nozzle Retainer Washer	Teflon
62-21	2	Hose Cap	See Note 7
62-22	2	Hose Cap Gasket	Rubber
62-23-1	1	Hose Cap Chain	Steel
62-23-2	3	S-Hook	Steel
62-23-18	1	Pumper Cap Chain	Steel
62-25-60	1	Pumper Nozzle	Bronze
62-25-60-ST	1	Storz Nozzle	Bronze/Aluminum
62-25-61	1	Pumper Nozzle Seal	Buna-N
62-25-62	1	Pumper Nozzle Retainer	Ductile Iron
62-25-63	1	Pumper Nozzle Retainer Washer	Teflon
62-26	1	Pumper Cap	See Note 7
62-26-ST	1	Storz Nozzle Cap	Aluminum
62-27	1	Pumper Cap Gasket	Rubber
62-27-ST	1	Storz Cap Gasket	Rubber
62-29-14	2	Snap Ring	Stainless Steel
62-29-15	1	Breakable Flange	Gray Iron
62-29-16	1	Base Flange	Ductile Iron
62-29-30	1	Rod Coupling	Gray Iron
62-29-31	2	Coupling & Clip Pins	Stainless Steel
62-30-03	1	Hydrant Spring	Stainless Steel
62-30-04	1	Spring Plate	Stainless Steel
62-30-06	1	Travel Stop Nut	Bronze
62-30-07	1	Spring Plate Pin	Stainless Steel
62-30-11	1	Upper Hydrant Rod	Steel
62-30-12	1	Lower Hydrant Rod	Steel
62-31	1	Drain Lever	Bronze
62-35-OR	1	Hydrant Seat	Bronze
62-36-2	1	Seat O-ring -Outside	Buna-N
62-36-3	1	Seat O-ring-Inside	Buna-N
62-37-OR	1	Drain Ring	Bronze
62-38	1	Drain Ring Gasket	Composition Rubber
62-38-1	1	Barrel Gasket	Rubber
62-38-6	1	Base Gasket	Composition Rubber
62-39	8	Base Bolt and Nut	Stainless Steel
62-39-9	8	Barrel Bolt and Nut	Plated Steel
62-40	1	Hydrant Valve Top	Ductile Iron
62-41	1	Hydrant Valve	EPDM Rubber
62-42	1	Hydrant Valve Bottom	Gray Iron
62-46-2	1	Flanged Base	Ductile Iron
62-46-5	1	Mechanical Joint Base	Ductile Iron
62-46-TY	1	TYTON® Base	Ductile Iron
84-46-6AA	1	ALPHA™ Base	Ductile Iron
84-46-6AX	1	ALPHA™ XL Base	Ductile Iron
62-144	1	Weather Shield	Rubber
62-145	1	Rod Sleeve	Bronze
62-146	2	Sleeve O-ring	Buna-N

NOTES

1. Size and shape of nut on operating nut and cap, threading on nozzles and caps, and the direction of opening made to specifications.
2. Cap chains are not furnished unless specified.
3. Working pressure 200 psig, test pressure 400 psig.
4. Hydrant conforms to ANSI/AWWA C502 standard.
5. Upper barrel can be rotated 360°.
6. UL Listed and Approved by FM Approvals in allowable configurations.
7. National Standard and other common cap configurations are constructed of ductile iron. Other offerings may be constructed of gray cast iron.
8. Nominal turns to open is 19-1/2.
9. TYTON® is a registered trademark of United States Pipe and Foundry Co., LLC.
10. ALPHA™ is a licensed trademark of Romac Industries, Inc. (U.S. Patent 8,894,100)

AMERICAN Flow Control strongly recommends that you follow routine maintenance on fire hydrants as outlined in AWWA Manual M-17 for Installation, Field Testing and Maintenance of Fire Hydrants. The ease of operation and the frequency of repair depends on the condition of the water system and the maintenance given. Dirt, gravel and other foreign material in the hydrant may prevent it from closing or draining properly, which may result in damage to the hydrant main valve. Under most operating conditions AMERICAN Flow Control recommends semiannual lubrication and inspection of fire hydrants.

FEATURES

The 5 1/4 in. American-Darling B-62-B-5 fire hydrant, by AMERICAN Flow Control® incorporates more than 100 years of experience in design, manufacture and field experience. This means dependable and efficient operation when needed.

Introduced in 1962, the 5 1/4 in. American-Darling B-62-B-5 hydrant is rated at 200 psig and is seat tested at 400 psig. This hydrant meets or exceeds all requirements of ANSI/AWWA C502 for dry-barrel hydrants.

The 5 1/4 in. American-Darling B-62-B-5 is manufactured with the features you expect from a high-quality fire hydrant. The all-bronze seat and drain ring ensure that the 5 1/4 in. B-62-B-5 hydrant is easily repaired by just one person.

5-1/4" American-Darling B-62-B-5 Standard Features:

- Upper barrel is furnished with an E-coat primer and a two-part polyurethane top coat for durability, gloss and color retention
- Ductile iron upper barrel, lower barrel, base and housing
- Easy 360° rotation of nozzle section
- 200 psig rated working pressure
- Shell tested at 400 psig

The 5 1/4 in. American-Darling B-62-B-5 fire hydrant is Certified to NSF/ANSI 61 and NSF/ANSI 372, which exhibit compliance with U.S Safe Drinking Water Act.

UL-FM

In applicable configurations, the 5 1/4 in. American-Darling B-62-B-5 hydrant is UL Listed and FM Approved. Both UL and FM Approvals require that we consistently manufacture and test our hydrants in full compliance with their stringent standards. Our facilities are subject to periodic inspections to ensure we are in compliance with their standards.

BENEFITS

Spring-Loaded Multiport Drains

Two port drains and four drain outlets are standard features on the 5 1/4 in. American-Darling B-62-B-5. The stainless steel rod spring helps assure drains close after approximately three turns of the operating nut. This important feature helps prevent washouts and erosion.

Near Vertical Hydrant Valve

Minimal taper on the 5 1/4 in. American-Darling B-62-B-5 hydrant valve helps prevent entrapment of debris in the hydrant seating area.

SPECIFICATIONS

Fire hydrants shall meet or exceed ANSI/AWWA C502, latest revision. Rated working pressure shall be 200 psig, test pressure shall be 400 psig and hydrants shall include the following specific design criteria:

The main valve closure shall be of the compression type. Traffic feature to be designed for easy 360° rotation of nozzle section during field installation.

The main valve opening shall not be less than 5 1/4 in. and be designed so that removal of all working parts can be accomplished without excavating. The hydrant valve shall be constructed of EPDM rubber and have a vertical taper of 20° or less. The bronze seat shall be threaded into a bronze drain ring. The draining system of the hydrant shall be bronze and positively activated by the main operating rod. Hydrant drains shall close completely after no more than three turns of the operating nut. There shall be a minimum of three internal ports and four outlets to the exterior of the hydrant. Drain shutoff to be by direct compression closure. Sliding drains are not permitted.

- Lubrication chamber
- Stainless steel bolting below grade
- Bronze-to-bronze seating
- Short, lightweight disassembly wrench
- Travel stop nut located in top of hydrant
- Positive compression, fast closing drains

Lubrication Chamber

Seals operating threads from water and debris. Proper maintenance is required.

Top Travel Stop Nut

Helps prevent stem buckling and damage to bronze components that may occur if excessive torque is applied in the full open position.

Hydrant barrels shall be made of ductile iron. Nozzles shall be retained by collars. Threaded-in nozzles and nozzles using set screws are not allowed.

Hydrant upper barrel shall be factory coated with Electrodeposition (E-coat) epoxy primer and catalyzed two-part polyurethane top coating. Base shall be coated with fusion-bonded epoxy. All bolting below grade shall be 304 stainless steel.

Hydrant shall be UL Listed and FM Approved in applicable configurations. All hydrants are to be Certified to NSF/ANSI 61 and NSF/ANSI 372.

Friction loss not to exceed 3.0 psig at 1000 gpm through 4 1/2 in. pumper nozzle. Hydrants shall be equal to the 5 1/4 in. American-Darling B-62-B-5 by AMERICAN Flow Control®.



AMERICAN

FLOW CONTROL

THE RIGHT WAY

AMERICAN Flow Control

P.O. Box 2727
Birmingham, AL 35202-2727
Phone: 800-326-8051
Fax: 800-610-3569
Email: afcsales@american-usa.com

Waterous Company

125 Hardman Avenue South
South St. Paul, MN 55075-1191
Phone: 888-266-3686
Fax: 800-601-2809
Email: afcsales@american-usa.com

WWW.AMERICAN-USA.COM

Distributed By:



B-62-B-5 Product Videos

Product literature may become outdated. AMERICAN is not responsible for out-of-date information, errors or omissions.
Please contact AMERICAN for the most current product information.