

SPECIFICATION SUBMITTAL


Project: _____



OBP05-2, VBPO5-2, XBP05-2



**OBP05-IP-2, VBPO5-IP-2,
XBP05-IP-2**

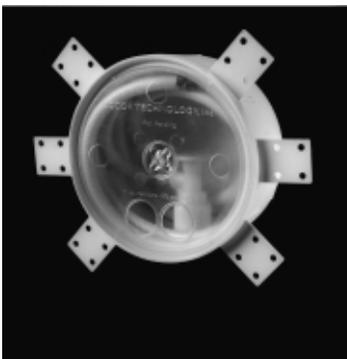

BOX WITH PROTECTIVE COVER

FlowTite™ Ice Maker Outlet Boxes with Valve and Valve/Riser System For Copper, CPVC and PEX

Model Number	Description
<input type="checkbox"/> OBP05-2 (copper) <input type="checkbox"/> VBPO5-2 (cpvc) <input type="checkbox"/> XBP05-2 (PEX)	Round high impact polystyrene box with factory installed FlowTite valve (1/2" x 1/4" compression outlet), for copper, CPVC or PEX with face-plate. Metal insert sleeve (not included) required if poly tubing is used for icemaker connection. Optional protective cover.
<input type="checkbox"/> OBP05-IP-2 (copper) <input type="checkbox"/> VBPO5-IP-2 (cpvc) <input type="checkbox"/> XBP05-IP-2 (PEX)	Round high impact polystyrene box with factory installed FlowTite valve and 84" White High Performance™ connector x 1/4" compression nut, for copper, CVPC or PEX with face plate. Protective cover included.

Design Criteria

- Unique round design.
- Stronger and durable. No need to level compared to rectangular or square boxes. Eliminates call backs.
- Six tough support nailing tabs, for ease of installation and superior support.
- Install in any direction (up, down, sideways). Three tabs provide more support on the stud.
- Movable nailing brackets included for additional support when needed.
- Brackets for additional support behind the stud or to support additional bracing, if necessary for 2 x 4 or 2 x 6 walls.
- Protective Cover – included on models with one piece valve/riser. Optional on valve only model.
- Protects valve and riser from paint and dirt at rough in stage.
- **FlowTite** box, valve, and connectors are one integral unit.
- One piece unit eliminates the “gray area” of responsibility for the hook up, from the ice maker valve to the appliance. 100% factory air tested.
- Clean white look for the builder and owner.
- Non-corrosive, no rust, high tech look.
- Long term owner protection.
- Health safe NSF61 material with written 10 year labor and material warranty.
- Reduced maintenance cost.
- Valves are removable by twisting counter-clockwise.

Codes/Standards

Listings:

- IAPMO Listed File 3893 (UPC)
- **FlowTite** valves and risers listed by SBCCI, BOCA, IPC '97, IAPMO, NSF 61/9

Manufactured in accordance with:

- PS54-92
- Type III, Class I per ASTM D4549 Polystyrene box
- PS74-95 – flexible riser standard
- ANSI/ASME A112.18.6
- ANSI A112.18.1 – “plumbing Fixture Fittings”

Warranty: 10 years including labor (see warranty certificate)